MILITARY STANDARD

CARLOADING


PROJECTILE, 16", A P MK 8 AND MOD 1
IN HANDLING BAND MK 35 MOD 0
FLEET ISSUE UNIT LOAD

MIL-STD-1325-92
(NAVY)

17 JULY 1973

UNIT LOAD DATA

UNIT LOAD DRAWING	[illegible] 35/135
WEIGHT	2790 LBS
DIMENSIONS	72 1/16L x 8 1/2W x 26 1/2H
PACKING WEIGHT	24
CUBE	24.0 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES A

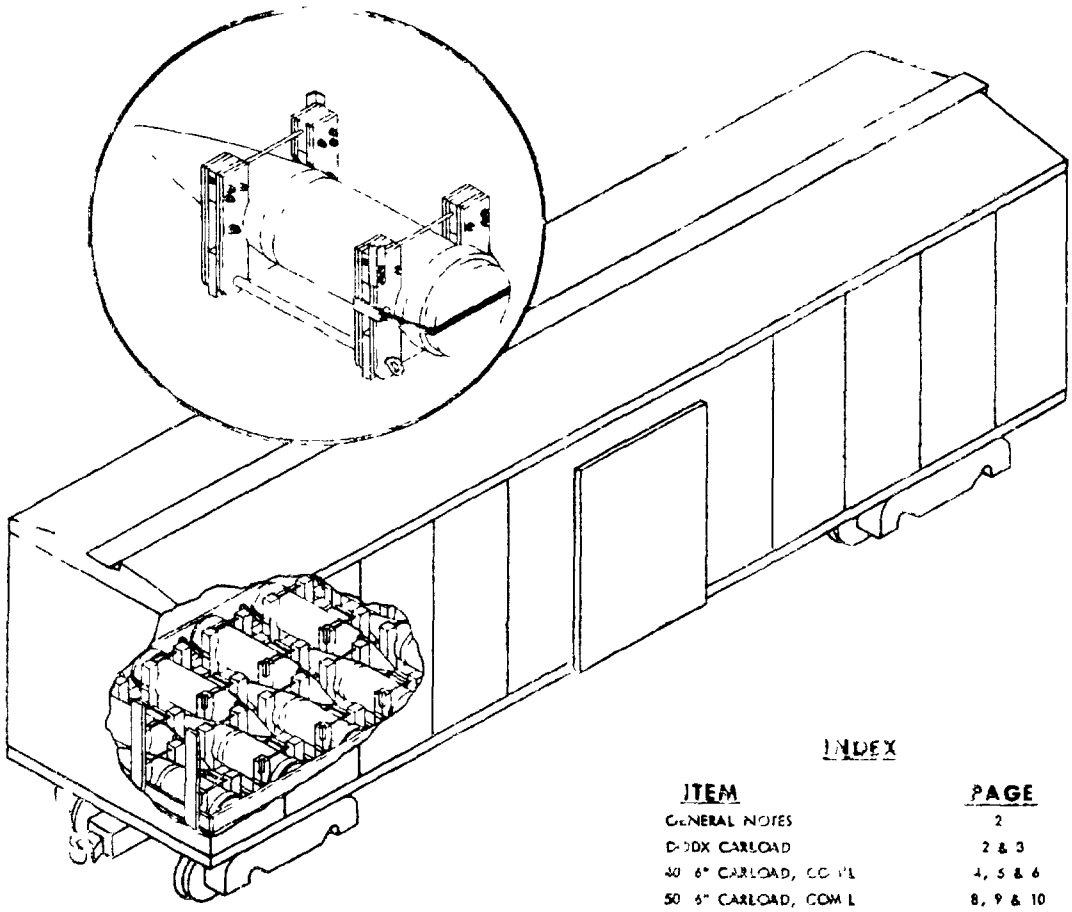

INDEX

ITEM	PAGE
GENERAL NOTES	2
DODX CARLOAD	2 & 3
40 6" CARLOAD, COMB	4, 5 & 6
50 6" CARLOAD, COMB	8, 9 & 10

NOTE

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING TRUCK LOADING AND CONTAINERLOADING MILITARY STANDARDS REFER TO INDEX OF STANDARDS MIL-HDBK-236 (NAVY)

AUTHORIZED AND RELEASED FOR GENERAL USE

[illegible] 7/3/73

NAME

SIGNATURE [illegible] TECHNICAL DIRECTING AGENCY (TDA) [illegible]

[illegible] 7/6/73

SIGNATURE OF DIRECTOR DATE

APPROVED BY BUREAU OF EXPLOSIVES

[illegible] MILITARY ASSISTANT 7/6/73

NAME DATE

ORIGINATOR [illegible] 7/16/73

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAVAL WEAPONS STATION EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

GENERAL NOTES


1. FOR GENERAL INFORMATION CONCERNING ORDERING, INSPECTING, AND PREPARING CARS, AND FOR DUNNAGING MATERIALS, DESIGN AND INSTALLATION OF DUNNAGE SEE THE GENERAL DOCUMENT WR-52 "CARLOADING OF WEAPONS AND MAJOR WEAPON SYSTEM COMPONENTS"
2. WHEN PLANNING SHIPMENTS ORDER THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT UTILITY LOADER CARS SHALL BE SERIES DODX 28000
3. LOADING PLANS SHOWN ARE FOR DODX UTILITY LOADER CAR WITH 50 FT 6 INCHES INSIDE LENGTH 107 3/4 INCHES INSIDE WIDTH (FIFTEEN RAILS 111 INCHES INSIDE WIDTH BETWEEN SIDE WALLS) COMMERCIAL BOXCARS WITH 50 FT 6 INCHES INSIDE LENGTH, 110 INCHES INSIDE WIDTH AND COMMERCIAL BOXCARS WITH 50 FT 6 INCHES INSIDE LENGTH 110 INCHES INSIDE WIDTH
4. THE LOAD CONSISTS OF 16 AP PROJECTILES MK 8 AND MODS IN HANDLING BANDS MK 85 AND MOD 0
5. THE UNIT LOADS ARE HANDLED AND LOADED WITH A SUITABLE FORK LIFT TRUCK
6. UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH WR-52
7. APPLICABLE MATERIAL SPECIFICATIONS

   DUNNAGE LUMBER - FED SPEC MM-L-751

   NAILS - FED SPEC FF-N-105
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA CLOSE AND SEAL BOXCAR DOORS AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL I)

50 FT. 6 IN. BOXCAR, DODX

1. THE CARLOAD CONSISTS OF 21 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING
2. A DETAILED DESCRIPTION AND OPERATING INSTRUCTIONS FOR THE UTILITY LOADER ARE CONTAINED IN OP 1750
3. TO PREVENT UNUSED DF EQUIPMENT FROM BECOMING DISLODGED DURING TRANSIT OF DODX CARS SECURE IT AT ANY LOCATION IN THE BOXCAR WHICH WILL NOT INTERFERE WITH UNLOADING
4. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN DODX BOXCARS THE SAME PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE ANY BAYS OR PORTION THEREOF MAY BE USED PROVIDING THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE CAR ARE COMPLIED WITH (SEE WR-52) EACH CROSSMEMBER WILL BE USED IN SUCH A MANNER THAT IT WILL RETAIN NOT MORE THAN 2000 LBS OF THE LADING

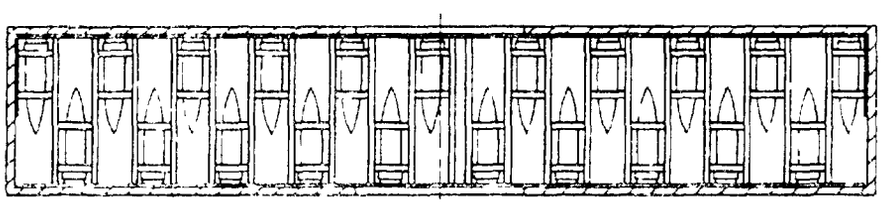


LOADING PLAN


ITEM NO	DESCRIPTION	SIZE	NO PCS REQ'D	MATERIAL	NAILS QTY	NAILS SIZE
3	LATERAL SWAY BRACE	2 X 6 X CUT TO FIT	42	FLOOR	1/4	D
2	LATERAL SWAY BRACE	2 X 6 X CUT TO FIT	42	FLOOR	1/4	D
1	END WALL BRACE	2 X 6 X 60	4	WALL	4	D

LIST OF MATERIAL AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

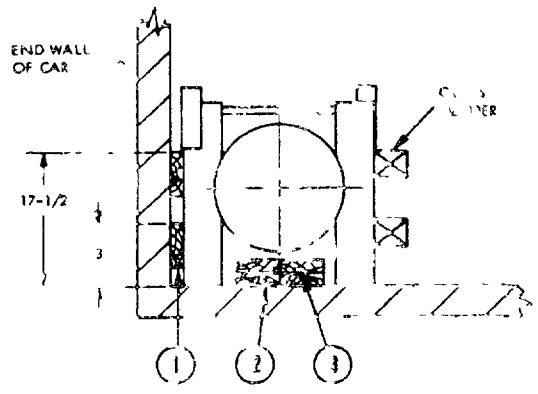


SECTION A-A

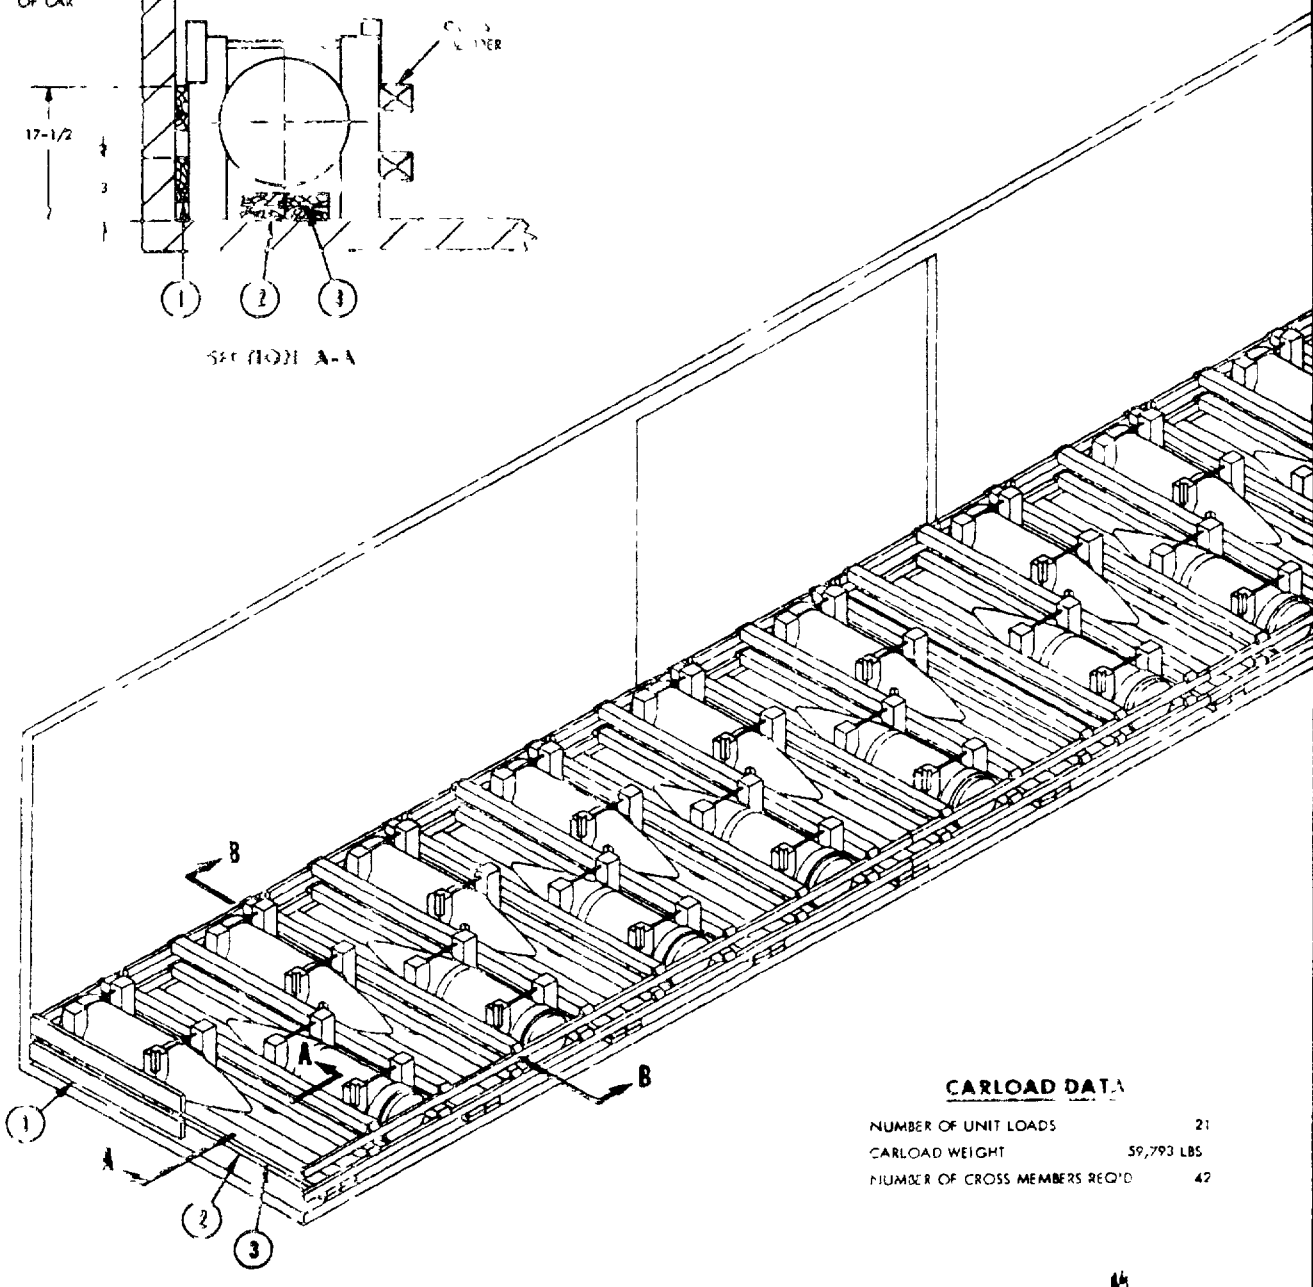

CARLOAD DATA

NUMBER OF UNIT LOADS	21
CARLOAD WEIGHT	59,793 LBS
NUMBER OF CROSS MEMBERS REQ'D	42

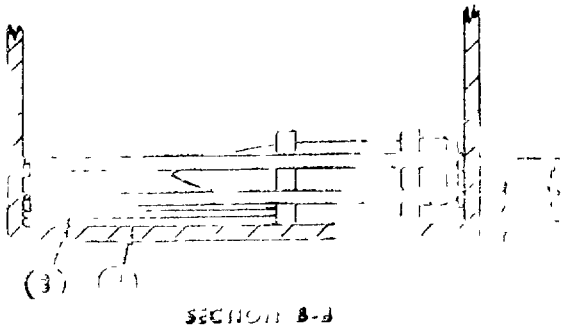

SECTION B-B

SHOWING LOCATIONS OF WALL ANCHOR USED FOR CROSS MEMBERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

40 FT. 6 IN. BOXCAR, COMMERCIAL

1. THIS CARLOAD CONSISTS OF 77 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING.
2. WHEN LESS THAN CARLOAD QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS THE CAR SHALL BE LOADED IN A MANNER SIMILAR TO THE METHOD DEPICTED FOR A FULL CARLOAD AND IN ACCORDANCE WITH THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR (SEE GENERAL DOCUMENT WR-57 PAGE 14). THE DOORWAY AREA OF THE CAR SHALL BE DUNNAGED USING THE METHOD SHOWN IN THE DOORWAY DETAIL OF THE LOADING PLAN. PACKAGES WHOSE DISTANCE BETWEEN PROJECTILES IN EACH END OF THE CAR IS GREATER THAN 8 FT. THE PROJECTILES SHALL BE BLOCKED AS SHOWN IN THE DETAIL FOR DETAIL, PAGE 8.
3. UNIT LOADS AS SHOWN ARE BASED ON CARS HAVING 8 FT. WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 8 FT. WIDE.


* 2 X 8 X CAR LENGTH. RANDOM LENGTH PIECES MAY BE USED EXCEPT PIECE SPANNING DOORWAY AREA MUST BE SUFFICIENT LENGTH TO ALLOW IT TO BE NAILED TO CAR WALL WITH 5 NAILS EACH END

PIECE NO	DESCRIPTION	SIZE	NO PCS REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
10	TOP CLEAT	2 X 8 X 11	25	7	3/JOINT	30d
9	TOP CLEAT	2 X 6 X 11	25	7	3/JOINT	30d
8	TOP CLEAT	2 X 6 X 20 3/4	4	5 7	3/JOINT	30d
7	LATERAL SWAY BRACE	2 X 6 X CUT TO FIT	54	6	1/FT	30d
6	LATERAL SWAY BRACE	2 X 6 X CUT TO FIT	54	CAR FLOOR	1/FT	16d
5	FLOOR CLEAT	2 X 6 X 9 3/4	4	4	3	30d
4	FLOOR CLEAT	2 X 6 X 9 3/4	4	CAR FLOOR	3	16d
3	END WALL HORIZONTAL	2 X 6 X 48	4	2	3/JOINT	12d
2	END WALL VERTICAL	2 X 6 X 60	4	CAR WALL	7	10d
1	SIDE WALL MEMBER	SEE NOTE *	4	CAR WALL	1/FT	10d

LIST OF MATERIAL AND NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

SECTION A-A
(SEE PAGE 6)

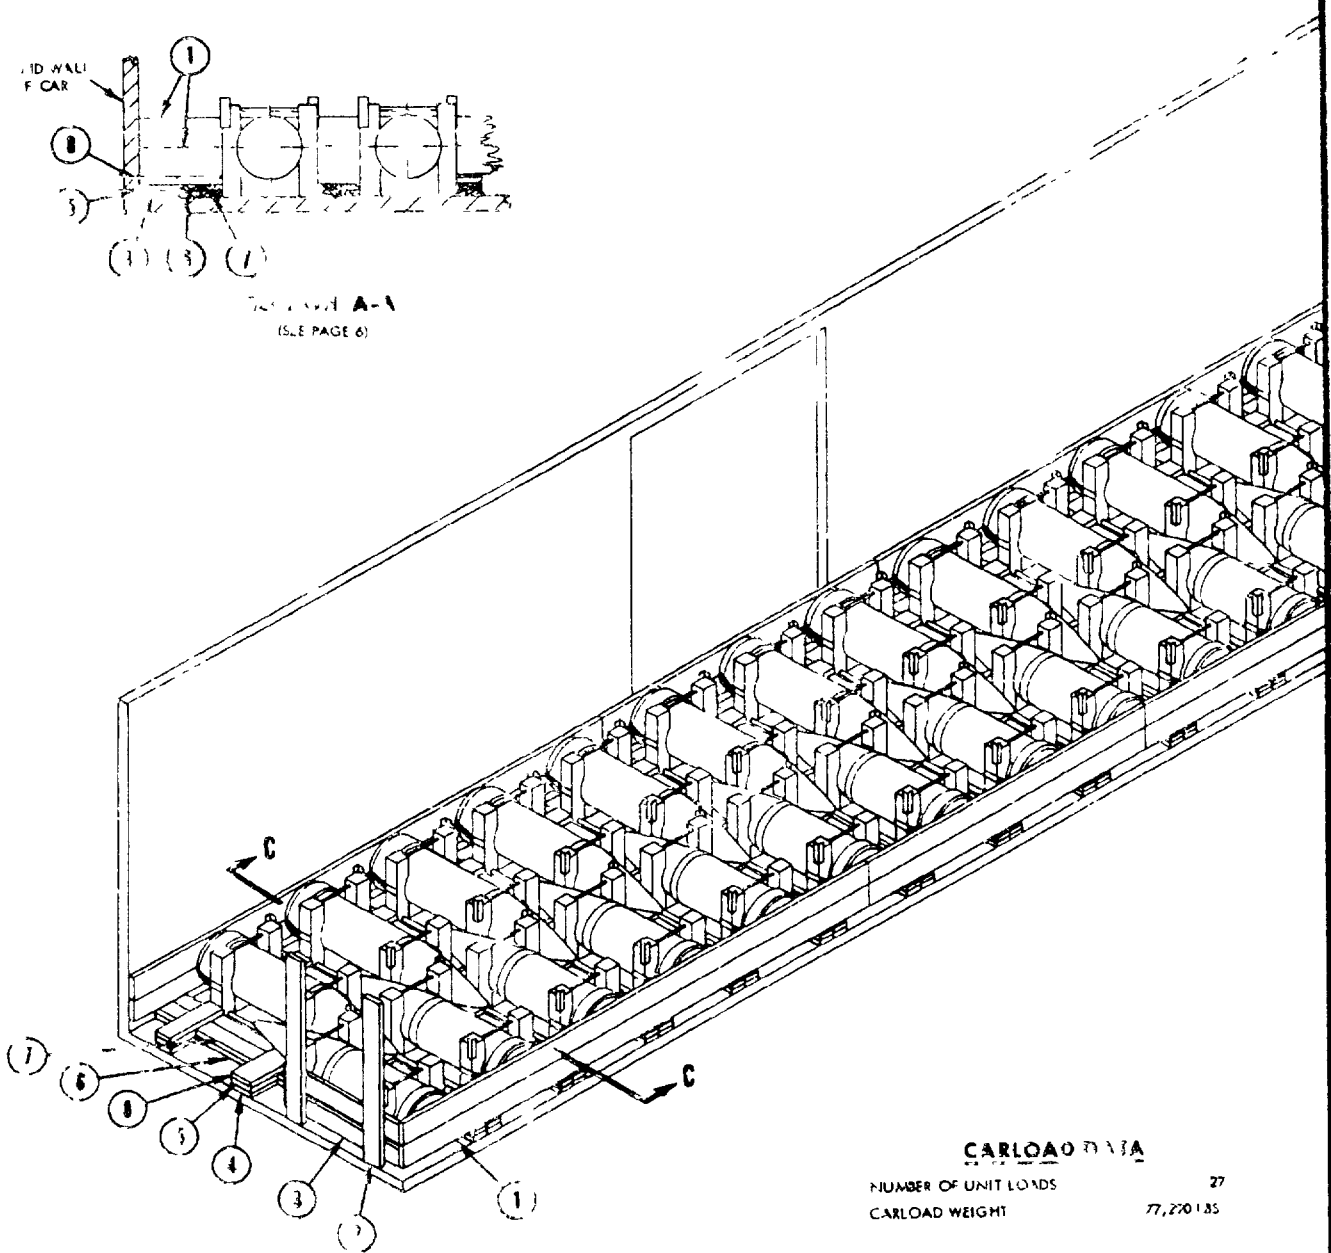


CARLOAD DATA

NUMBER OF UNIT LOADS	27
CARLOAD WEIGHT	77,270 LBS

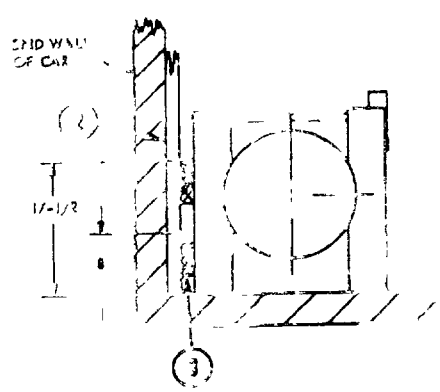


SECTION B
(SEE PAGE 6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

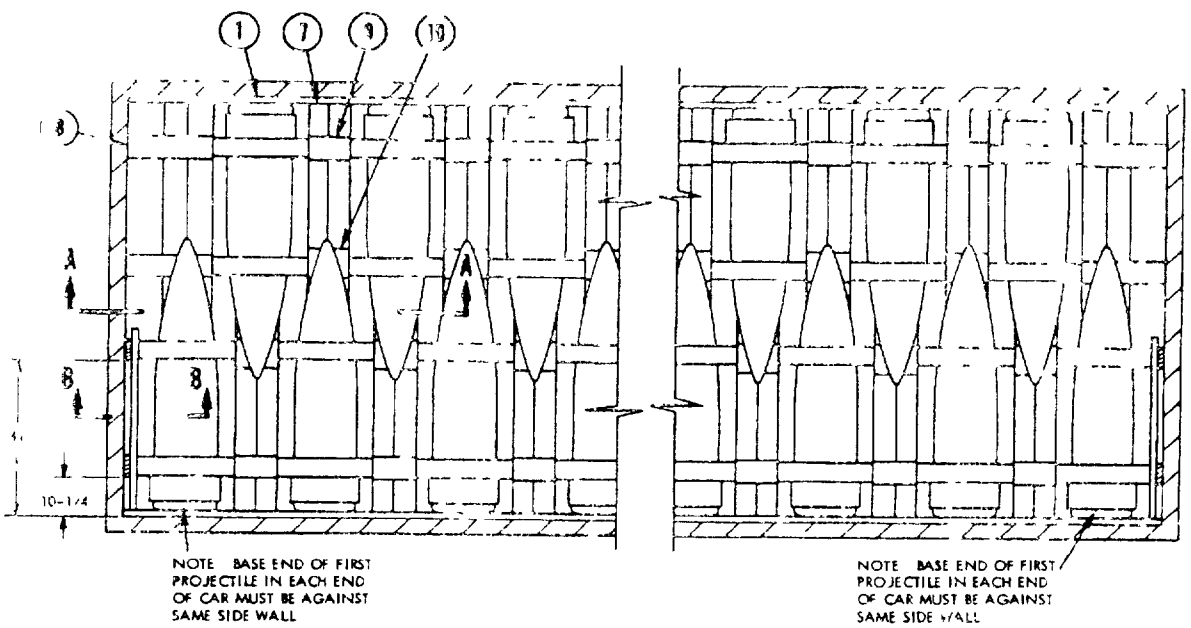

LOADING PLAN

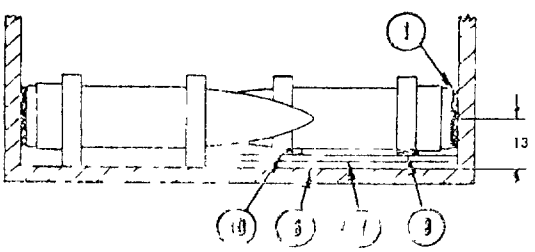

SECTION C-C

(SEE PAGE 51)


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

50 FT. 6 IN. BOXCAR, COMMERCIAL

1. THE CARLOAD CONSISTS OF 33 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING.
2. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS, THE CAR SHALL BE LOADED IN A MANNER SIMILAR TO THE METHODS DEPICTED FOR A FULL CARLOAD AND IN ACCORDANCE WITH THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR (SEE GENERAL DOCUMENT WR-52, PAGE 14). IF THE DISTANCE BETWEEN PROJECTILES IN EACH END OF THE CAR IS GREATER THAN 8 FT, THE PROJECTILES SHALL BE DUNNAGED AS SHOWN IN DETAIL F (CL DETAIL, PAGE 10).
3. THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 10 FT. WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 10 FT. WIDE.
4. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG TYPE DOORS. PROVIDING LUMBER OF SUFFICIENT LENGTH TO SPAN PLUG DOORS IS AVAILABLE. DUNNAGE MATERIAL MUST NOT BE NAILED TO ANY PLUG DOOR, WHETHER MAIN OR AUXILIARY. SECURELY CLOSE DOORS AND WIRE TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER.

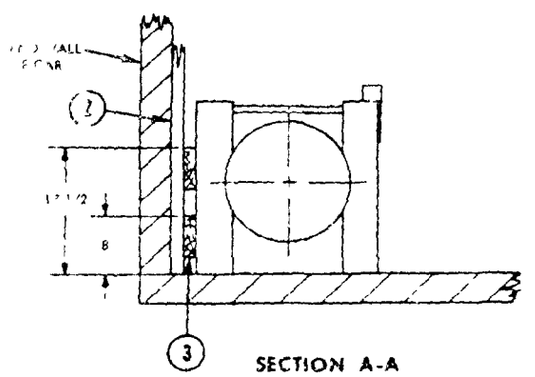

SECTION A-A

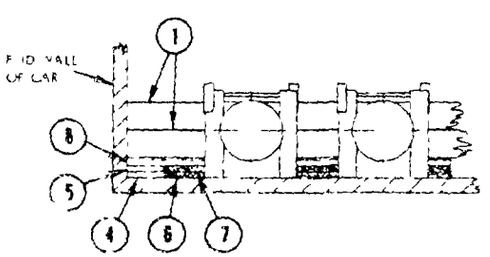


SECTION B-B

PIECE NO	DESCRIPTION	SIZE	NO PCS REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
18	DOORWAY TOP CLEAT	2 X 8 X CUT TO FIT	2	7, 12, 16	3/JOINT	30d
17	DOORWAY TOP CLEAT	2 X 6 X CUT TO FIT	2	7, 12, 14	3 JOINT	30d
16	DOORWAY SPACER CLEAT	2 X 8 X CUT TO FIT	2	15	3	30d
15	DOORWAY SPACER CLEAT	2 X 8 X CUT TO FIT	2	CAR FLOOR	3	16d
14	DOORWAY SPACER CLEAT	2 X 6 X CUT TO FIT	2	13	3	30d
13	DOORWAY SPACER CLEAT	2 X 6 X CUT TO FIT	2	CAR FLOOR	3	16d
12	DOORWAY CROSS BRACE	2 X 6 X 55	2	11	7	30d
11	DOORWAY CROSS BRACE	2 X 6 X 55	2	CAR FLOOR	7	16d
10	TOP CLEAT	2 X 8 X 11	29	7	3/JOINT	30d
9	TOP CLEAT	2 X 6 X 11	29	7	3/JOINT	30d
8	TOP CLEAT	2 X 6 X 20 3 4	4	5, 7	3/JOINT	30d
7	LATERAL SWAY BRACE	2 X 6 X CUT TO FIT	66	6	1/FT	30d
6	LATERAL SWAY BRACE	2 X 6 X CUT TO FIT	66	CAR FLOOR	1/FT	16d
5	FLOOR CLEAT	2 X 6 X 9 3/4	4	4	3	30d
4	FLOOR CLEAT	2 X 6 X 9 3/4	4	CAR FLOOR	3	16d
3	END WALL HORIZONTAL	2 X 6 X 48	4	2	3/JOINT	12d
2	END WALL VERTICAL	2 X 6 X 60	4	CAR WALL	7	10d
1	SIDE WALL MEMBER	SEE NOTE *	4	CAR WALL	1/FT	10d


LIST OF MATERIAL AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

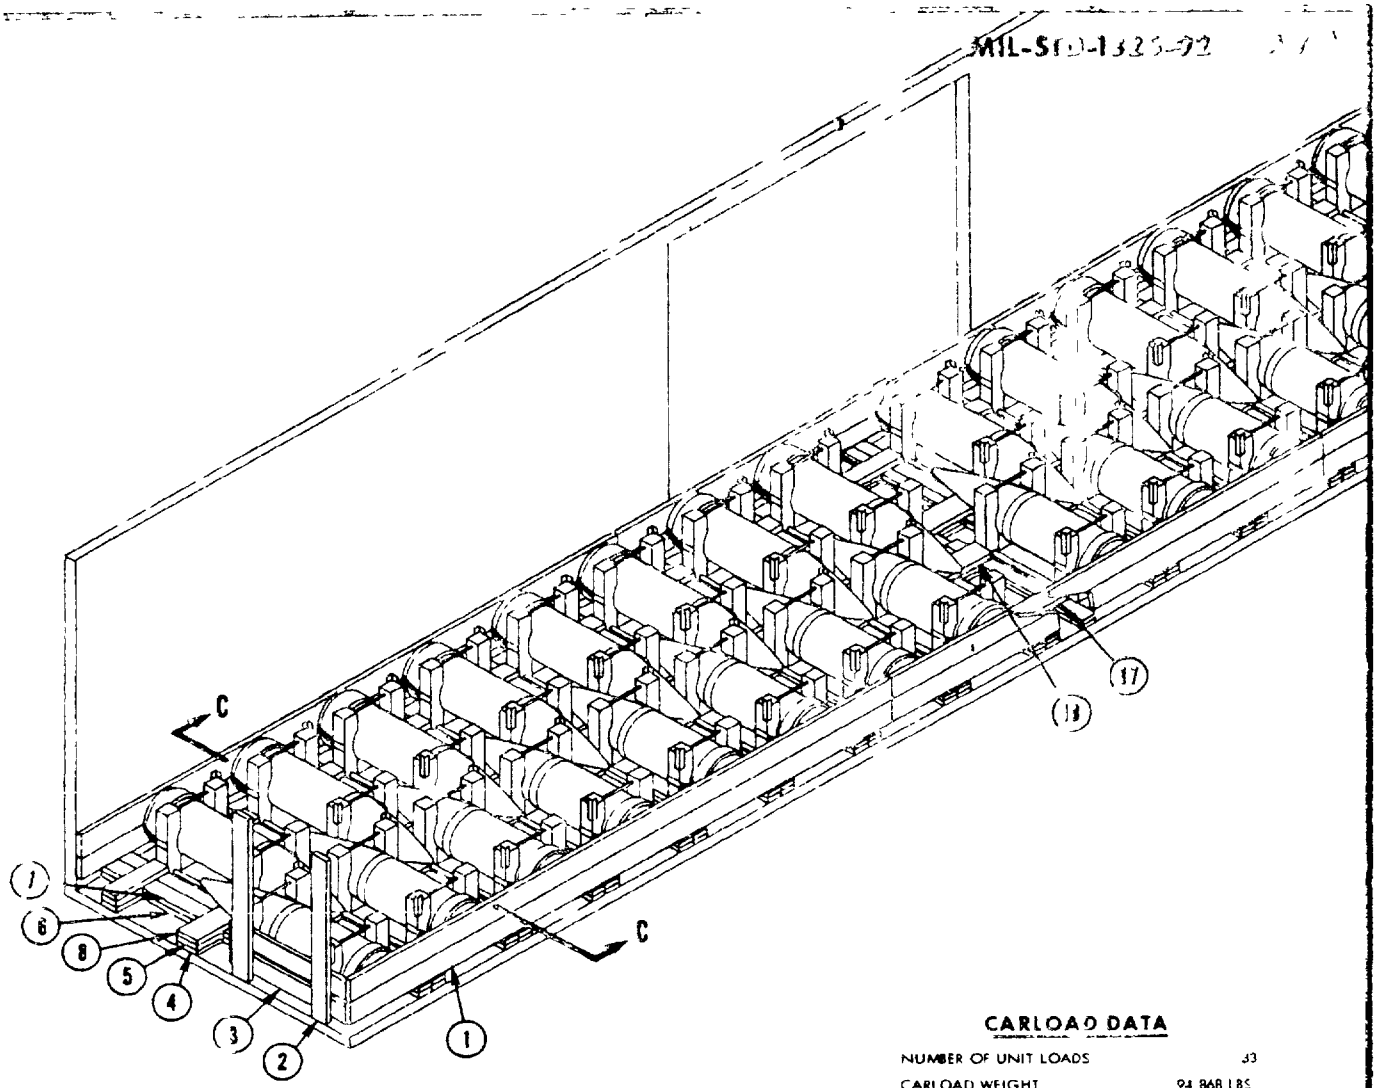

CARLOAD DATA

NUMBER OF UNIT LOADS	33
CARLOAD WEIGHT	94 868 LBS

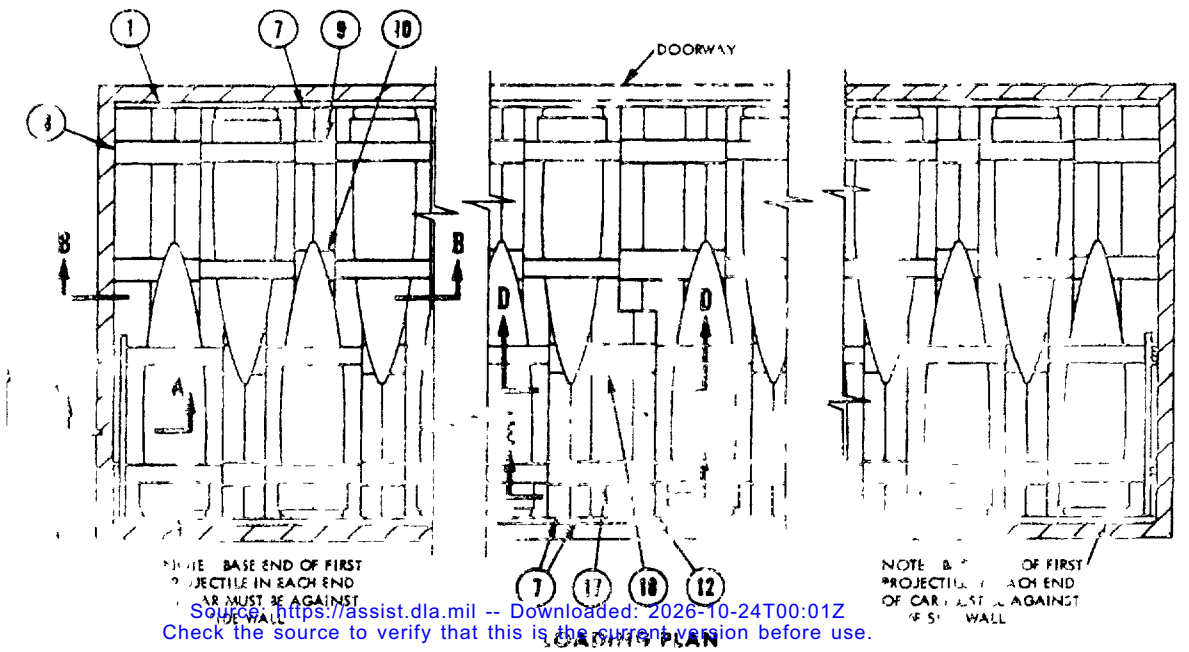


NOTE BASE END OF FIRST PROJECTILE IN EACH END OF CAR MUST BE AGAINST SIDE WALL


NOTE BASE END OF FIRST PROJECTILE IN EACH END OF CAR MUST BE AGAINST SIDE WALL

LOADING PLAN


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

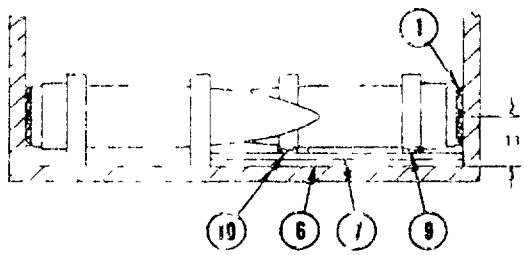


SECTION C-C
(SEE PAGE 9)

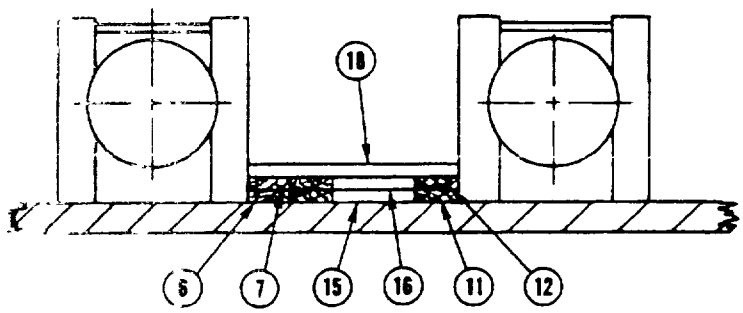

SECTION D-D
(SEE PAGE 9)

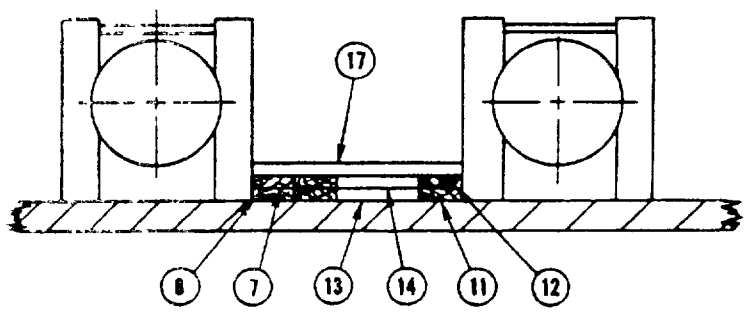

SECTION E-E
(SEE PAGE 9)

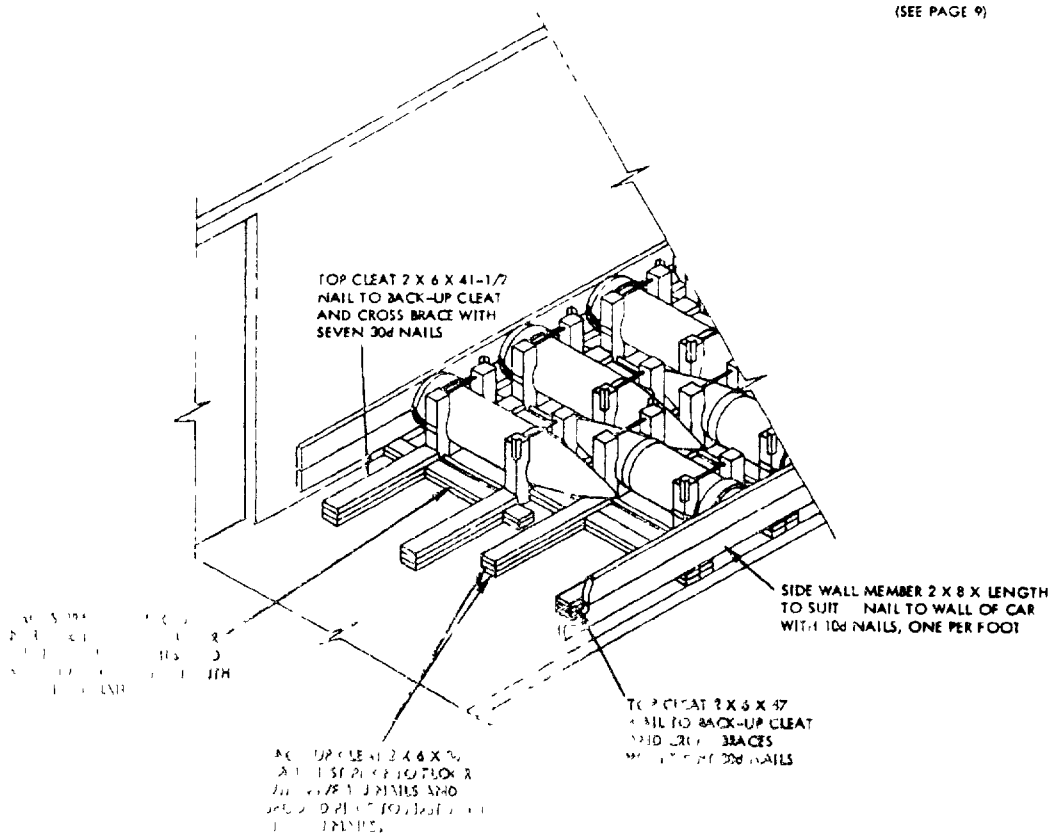

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.