MILITARY STANDARD

MIL-STD-1325-97 (NAVY)

5 APRIL 1976

SUPERSEDING
WR 52/97
4 OCT 1966

RAILCAR LOADING OF HAZARDOUS MATERIALS

EXPLOSIVE SECTION MK 1 MOD 1
IN CRATE MK 101 MOD 1
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR 54/161
WEIGHT (APPROXIMATE)	2474 LBS
DIMENSIONS	53 5/8 L X 50 W X 31 5/16 H
CUBE	48 5 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES A

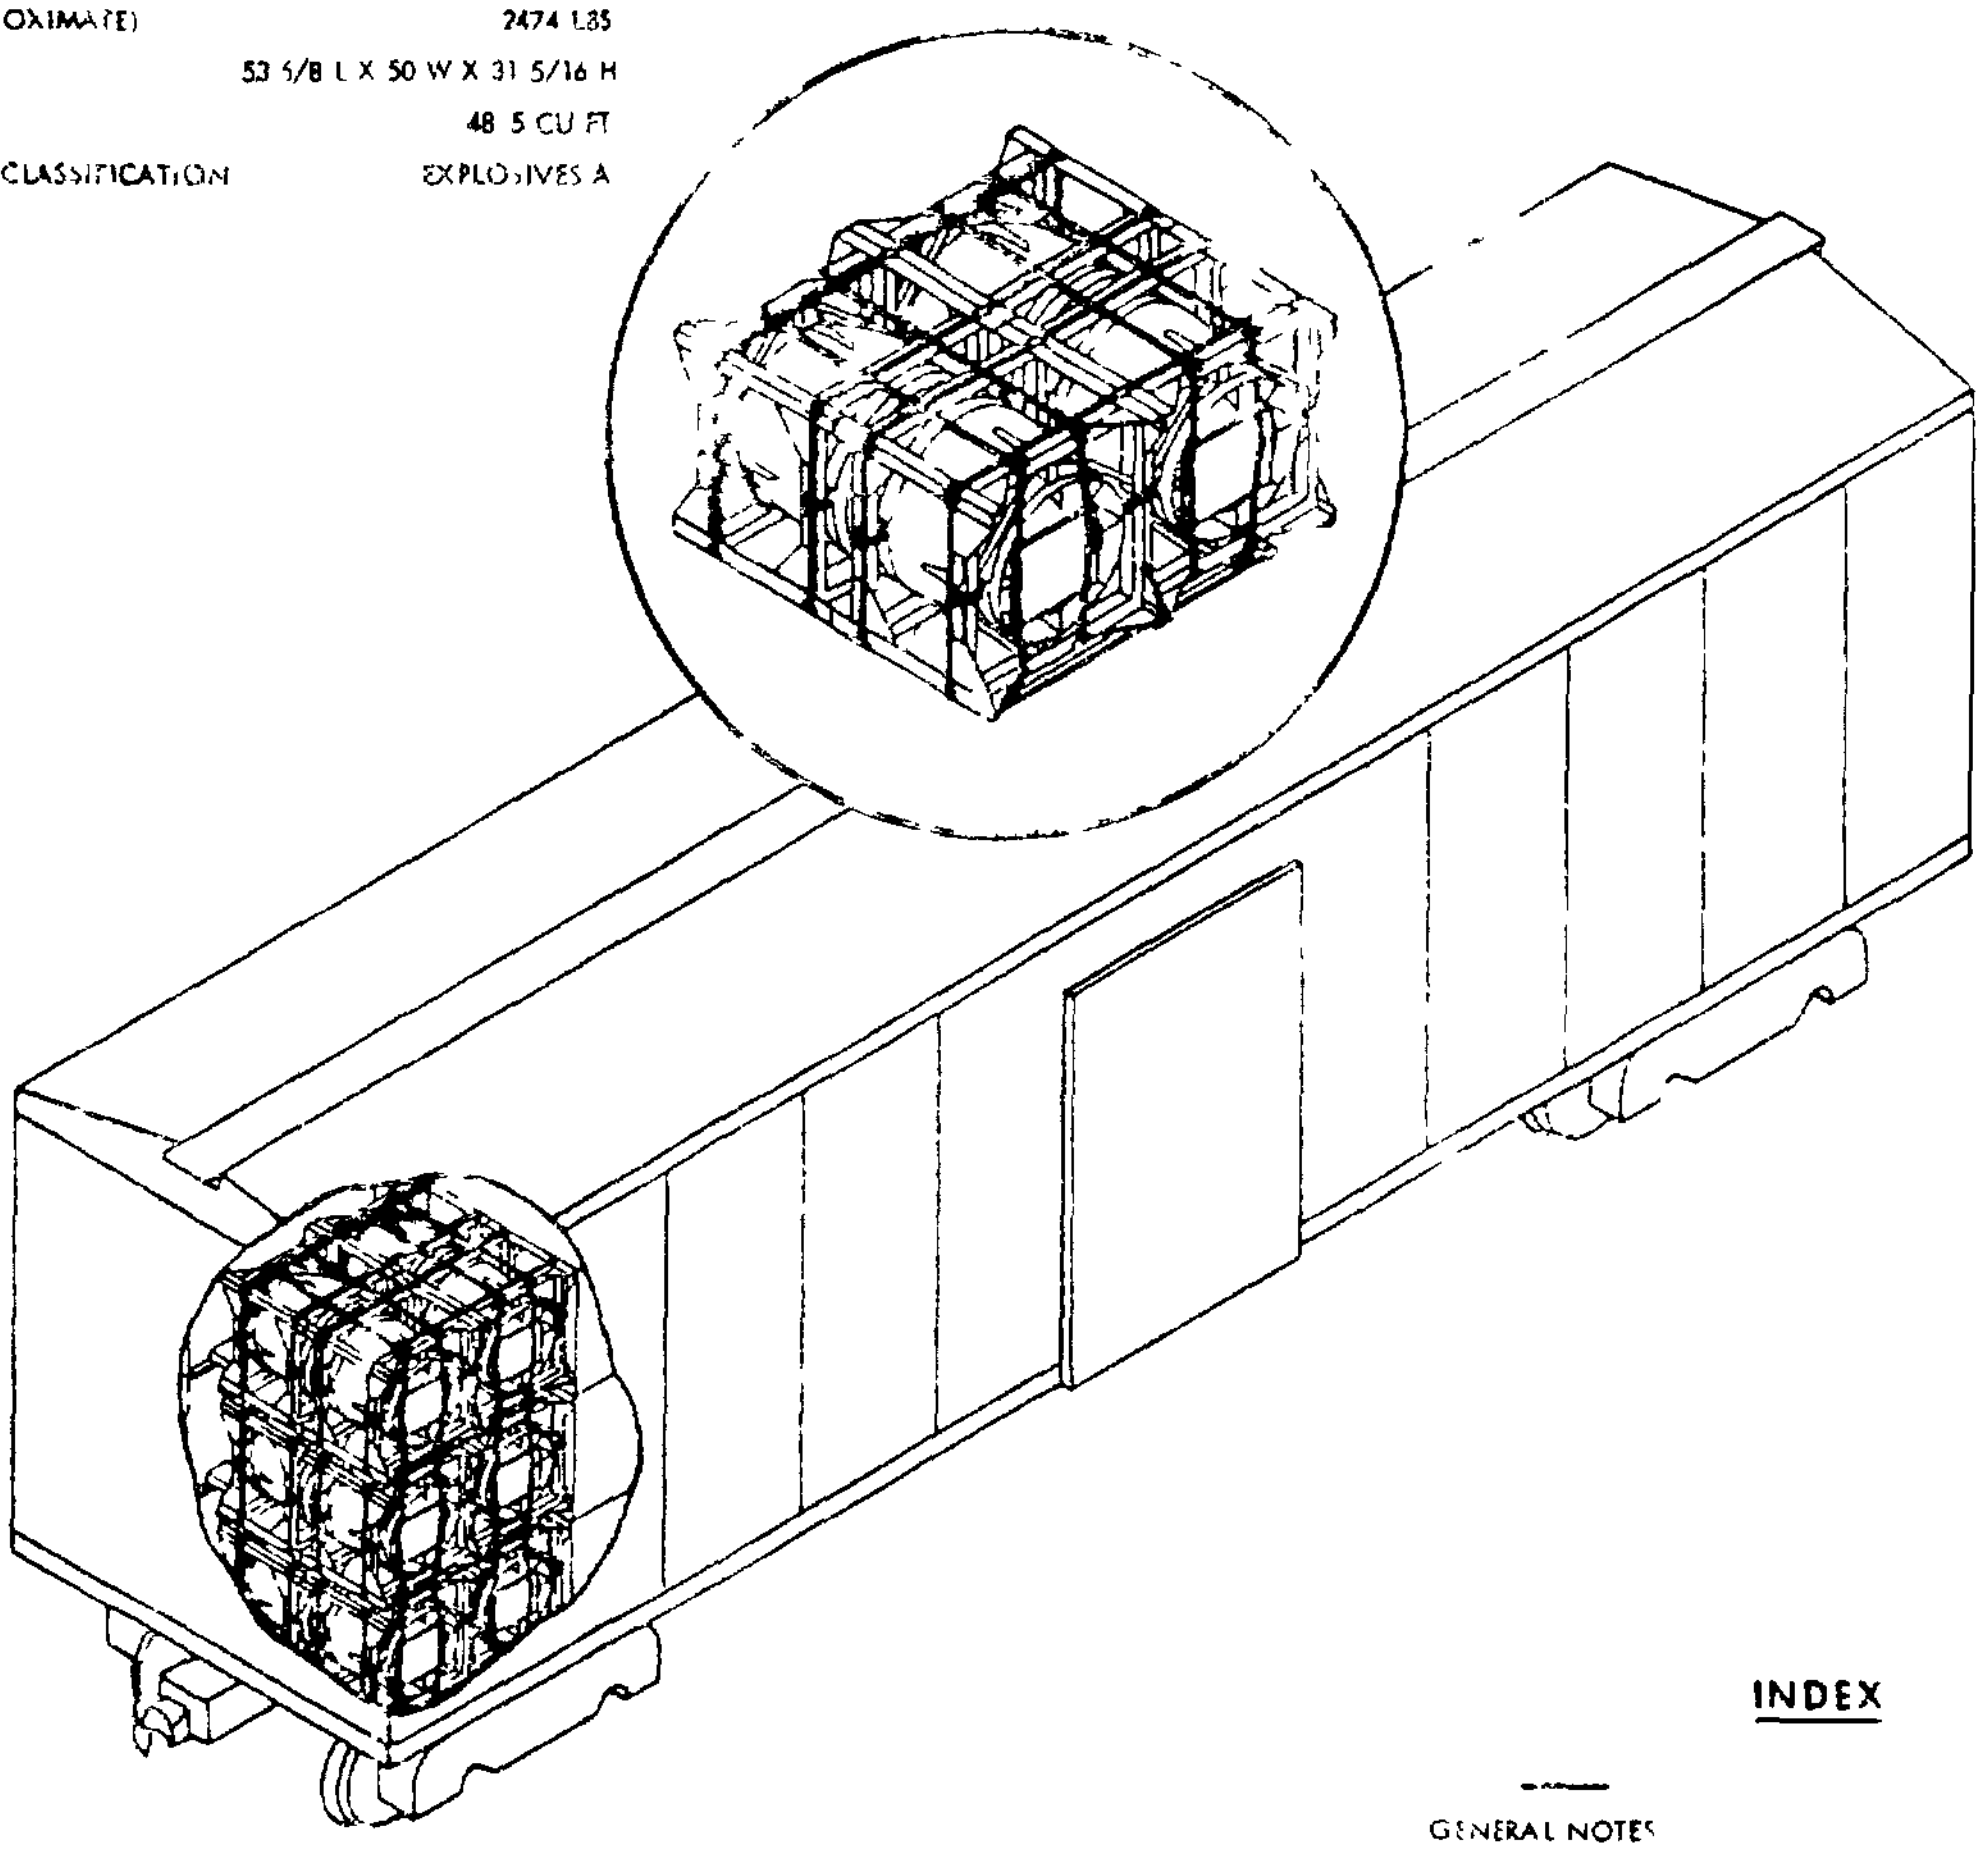

INDEX

PAGE

GENERAL NOTES 2
40 6 CARLOAD COM 2 3 & 4
50 6 CARLOAD COM 6 7 & 8

NOTES

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING TRUCKLOADING AND CONTAINERLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED FOR GENERAL USE.

3/31/76
SIGNATURE DATE

4/6/76
BY DIRECTION DATE

APPROVED BY BUREAU OF EXPLOSIVES

3/12/76
SIGNATURE FOR RAILROADS & ARMED SERVICES DATE

ORIGINATOR 4/4/76
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
WPNS STA EARLE NEW JERSEY

GENERAL NOTES

FOR GENERAL INFORMATION CONCERNING ORDERING, INSPECTING, AND PREPARING CARS, AND FOR DUNNAGING MATERIALS DESIGN AND INSTALLATION OF DUNNAGE SEE THE GENERAL DOCUMENT MIL-STD-1325 (NAVY) RAILCAR LOADING OF HAZARDOUS MATERIALS

2 WHEN PLANNING SHIPMENTS ORDER THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT. DODX UTILITY LOADER CARS SHALL NOT BE USED FOR ITEMS WITH EXPLOSIVES A OR B HAZARD CLASSIFICATION

3 LOADING PLANS SHOWN ARE FOR COMMERCIAL BOXCARS WITH 40 FT 6 IN INSIDE LENGTH, 110 IN INSIDE WIDTH, AND COMMERCIAL BOXCARS WITH 50 FT 6 IN INSIDE LENGTH, 110 IN INSIDE WIDTH

4 THE LOAD LIMIT OF A CAR MUST NOT BE EXCEEDED NOR SHOULD THE RAILCAR BE LOADED SO THAT MORE THAN ONE-HALF OF THE LOAD LIMIT IS CARRIED BY ONE SET OF TRUCKS

5 IF END WALLS OF CARS ARE NOT SQUARE THEY MUST BE SQUARED OFF BEFORE STARTING TO LOAD CAR

6 THE LOAD CONSISTS OF MK 1 MOD 1 EXPLOSIVE SECTIONS IN MK 101 MOD 0 CRATES PALLETIZED IN ACCORDANCE WITH WR-54/161

7 THE UNIT LOADS ARE HANDLED AND LOADED WITH A SUITABLE FORKLIFT TRUCK

8 UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH MIL-STD-1325 (NAVY)

9 ALL STRAP JOINTS SHALL BE CRIMP-TYPE JOINTS MADE WITH A CRIMPING TOOL THAT DOES NOT CUT THE SEAL OR STRAP, RATHER THAN A TOOL THAT MAKES A NOTCH-TYPE JOINT. THE STRAPPING MUST BE IN ACCORDANCE WITH NAVSUP NOTICE 4642 DATED 21 APRIL 1971

10 APPLICABLE MATERIAL SPECIFICATIONS

  DUNNAGE LUMBER - FED SPEC MM-L-751
  NAILS - FED SPEC FF-N-105
  STRAPPING - FED SPEC QQ-S-781 TYPE I, HEAVY DUTY, CLASS A, DRY (UNLUBRICATED)
  SEALS - FED SPEC QQ-S-781 STYLE III, HEAVY DUTY

11 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA. CLOSE AND SEAL BOXCAR DOORS, AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL 1)

40 FT 6 IN BOXCAR, COMMERCIAL

1 THE CARLOAD CONSISTS OF 48 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING

2 WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS THE PARTIAL LAYER OF LADING SHALL BE BRACED BY MEANS OF END BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-100 (NAVY) OR PARTIAL UPPER LAYER BRACING IN ACCORDANCE WITH MIL-STD-1325-102 (NAVY). SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED. THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH. SEE MIL-STD-1325 (NAVY)

3 THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 6 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICETD PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 6 FT WIDE

4 THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG DOORS PROVIDING STACKS WITH MORE THAN HALF OF THE UNIT LOAD IN THE DOORWAY AREA ARE UNITIZED WITH TWO LATERALLY APPLIED 1 1/4 IN STEEL STRAPS PER STACK EACH TENSIONED AND SEALED WITH TWO DOUBLE CRIMPED SEALS AND A TOP SWAY BRACE, CONSISTING OF A STRAPPING BOARD AND CROSS BRACE, TWO PER STACK (SEE DETAIL D) INSTALLED BETWEEN THE ROWS OF THE DOORWAY STACKS. EACH STRAP IS SECURED TO STRAPPING BOARD WITH TWO 1 1/4 IN STAPLES. DUNNAGE MATERIAL MUST NOT BE NAILED TO ANY PLUG DOOR WHETHER MAIN OR AUXILIARY, EXCEPT WHEN THE CAR HAS A COMBINATION OF A CONVENTIONAL SLIDING TYPE DOOR AND A PLUG TYPE DOOR AND AN ADEQUATE NAILING STRIP IS PROVIDED ON THE PLUG TYPE DOOR. IF LUMBER OF SUFFICIENT LENGTH TO SPAN PLUG DOORS IS NOT AVAILABLE RANDOM LENGTH MATERIAL, DOUBLED AND SPLICED BUT WITH JOINTS OF SPLICES OFFSET, MAY BE USED. DIMENSIONAL LUMBER DOORWAY PROTECTION (PIECES 12 AND 13) IS NOT REQUIRED WHEN PLUG DOOR EQUIPPED BOXCARS ARE USED EXCEPT WHEN CAR HAS A COMBINATION OF PLUG DOOR AND CONVENTIONAL SLIDING DOOR, THEN DIMENSIONAL LUMBER DOORWAY PROTECTION IS REQUIRED FOR THE CONVENTIONAL DOOR. PLUG DOORS MUST BE SECURELY CLOSED AND WIRED TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER

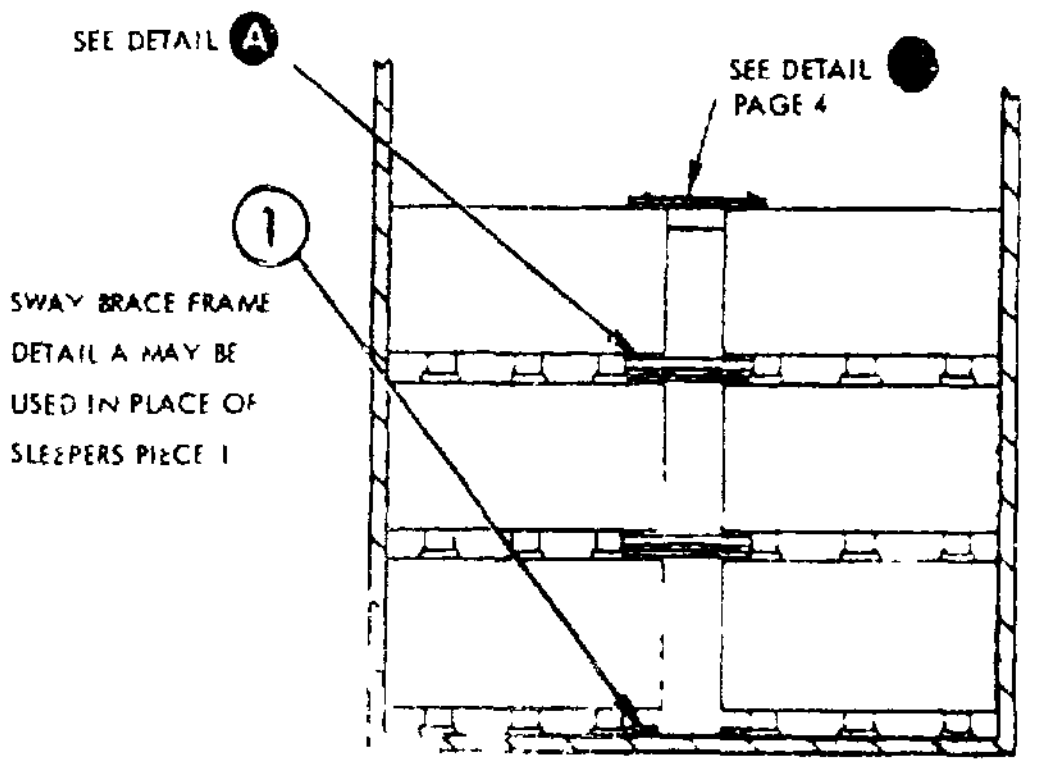

SWAY BRACE FRAME DETAIL A MAY BE USED IN PLACE OF SLEEPERS PIECE 1

SECTION B-B

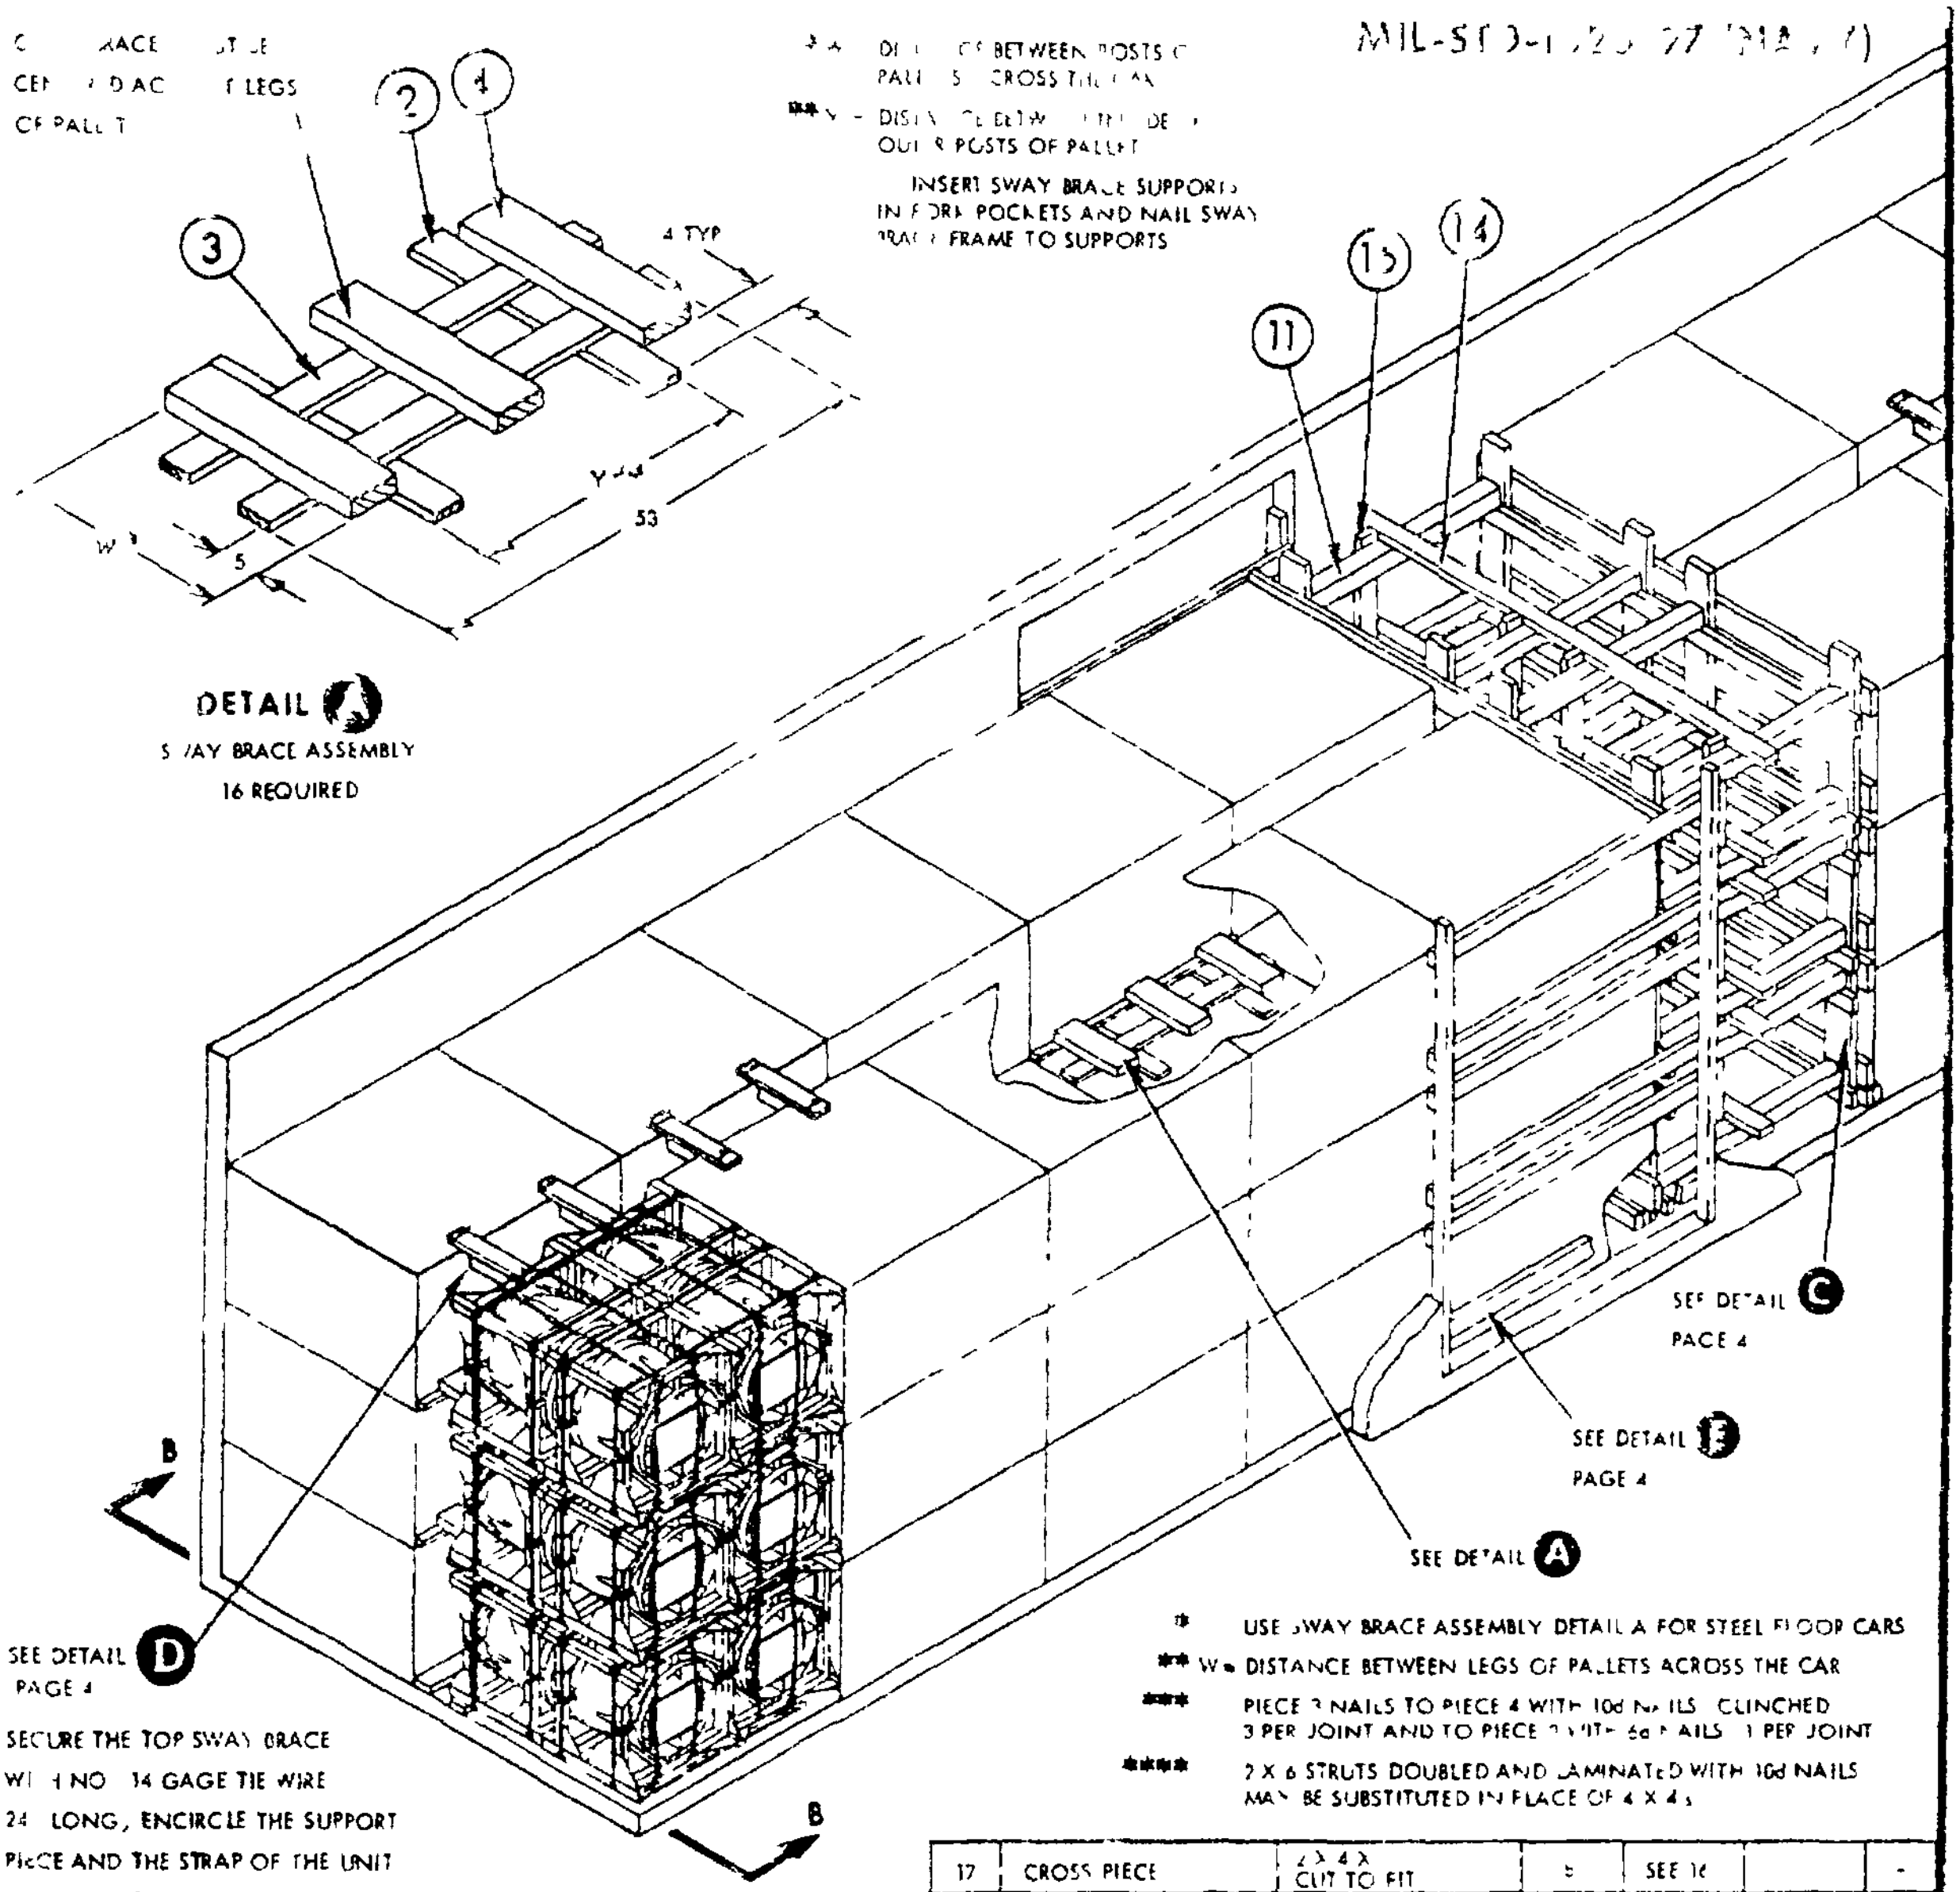

CROSS BRACE MUST BE CENTERED ACROSS LEGS OF PALLET

* W - DISTANCE BETWEEN POSTS OF PALLETS ACROSS THE CAR

** W - DISTANCE BETWEEN THE INSIDE OF OUTER POSTS OF PALLET

INSERT SWAY BRACE SUPPORTS IN FORK POCKETS AND NAIL SWAY BRACE FRAME TO SUPPORTS

DETAIL A

SWAY BRACE ASSEMBLY

16 REQUIRED

SEE DETAIL C
PAGE 4

SEE DETAIL E
PAGE 4

SEE DETAIL A

SEE DETAIL D
PAGE 4

SECURE THE TOP SWAY BRACE WITH NO. 14 GAGE TIE WIRE 24" LONG, ENCIRCLE THE SUPPORT PIECE AND THE STRAP OF THE UNIT LOAD AND TWIST TAUT

* USE SWAY BRACE ASSEMBLY DETAIL A FOR STEEL FLOOR CARS

** W = DISTANCE BETWEEN LEGS OF PALLETS ACROSS THE CAR

*** PIECE 3 NAILS TO PIECE 4 WITH 10d NAILS CLINCHED 3 PER JOINT AND TO PIECE 2 WITH 6d NAILS 1 PER JOINT

**** 2 X 6 STRUTS DOUBLED AND LAMINATED WITH 10d NAILS MAY BE SUBSTITUTED IN PLACE OF 4 X 4 s

CARLOAD DATA

NUMBER OF UNIT LOADS	48
LOAD WEIGHT (APPROX)	118,752 LBS
DUNNAGE WEIGHT (APPROX	1 725 LBS
CARLOAD WEIGHT (APPROX	120 477 LBS △

△ SEE LOADING PLAN NOTE PAGE 4

NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
5	CENTER GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	12	6	3 PER JOINT	10d
4	CROSS BRACE	2 X 6 X W**	48	SEE 3	-	
3	SWAY BRACE LONGITUDINAL	1 X 4 X 53	32	1 3	SEE NOTE ***	
2	SWAY BRACE SUPPORT	1 X 4 X (W 8)**	32	SEE 3		
1	SLEEPER	2 X 1 X 53*	16	CAR FLOOR	2 PER FOOT	6d

LIST OF MATERIALS & NAILING DATA

NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
17	CROSS PIECE	2 X 4 X CUT TO FIT	5	SEE 16		-
16	SUPPORT PIECE	1 X 4 X CUT TO FIT	8	17	4 SEE FIELD NOTE	10d
15	VERTICAL TIE BAR	2 X 4 X 9			3 PER JOINT	10d
14	HORIZONTAL TIE BAR	2 X 4 X CAR WIDTH 4	6	11	3 PER JOINT	10d
13	HORIZONTAL DOORWAY MEMBER	2 X 4 X DOOR WIDTH	12	12	2 PER JOINT	10d
12	VERTICAL DOORWAY MEMBER	2 X 3 X 102	4	DOOR POST	2 PER FOOT	20d
11	STRUT	4 X 4 X **** WEDGE FIT	24	6	2 PER FOOT	16d
10	HOLD DOWN CLEAT	2 X 3 X CUT TO FIT	4	9	4	16d
9	HOLD DOWN CLEAT	2 X 3 X CUT TO FIT	4	8	4	10d
8	HOLD DOWN SPACER	2 X 4 X CAR WIDTH	2	6	3 PER JOINT	10d
7	CENTER GATE STRUT CLEAT	2 X 4 X CAR WIDTH	12	6	3 PER JOINT	
6	CENTER GATE VERTICAL	2 X 6 X 102	8	SEE 7 5	-	-

LIST OF MATERIALS & NAILING DATA - A

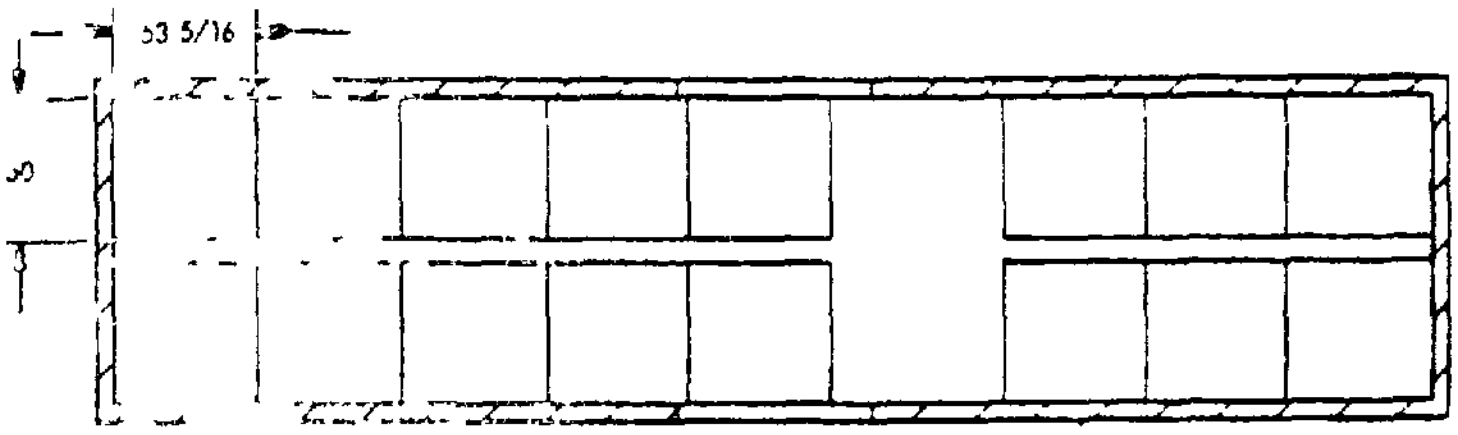

LOADING PLAN

THIS LOADING PLAN SHALL ONLY BE USED WHEN THE LOAD LIMIT OF THE BOXCAR EXCEEDS 125,999 LBS

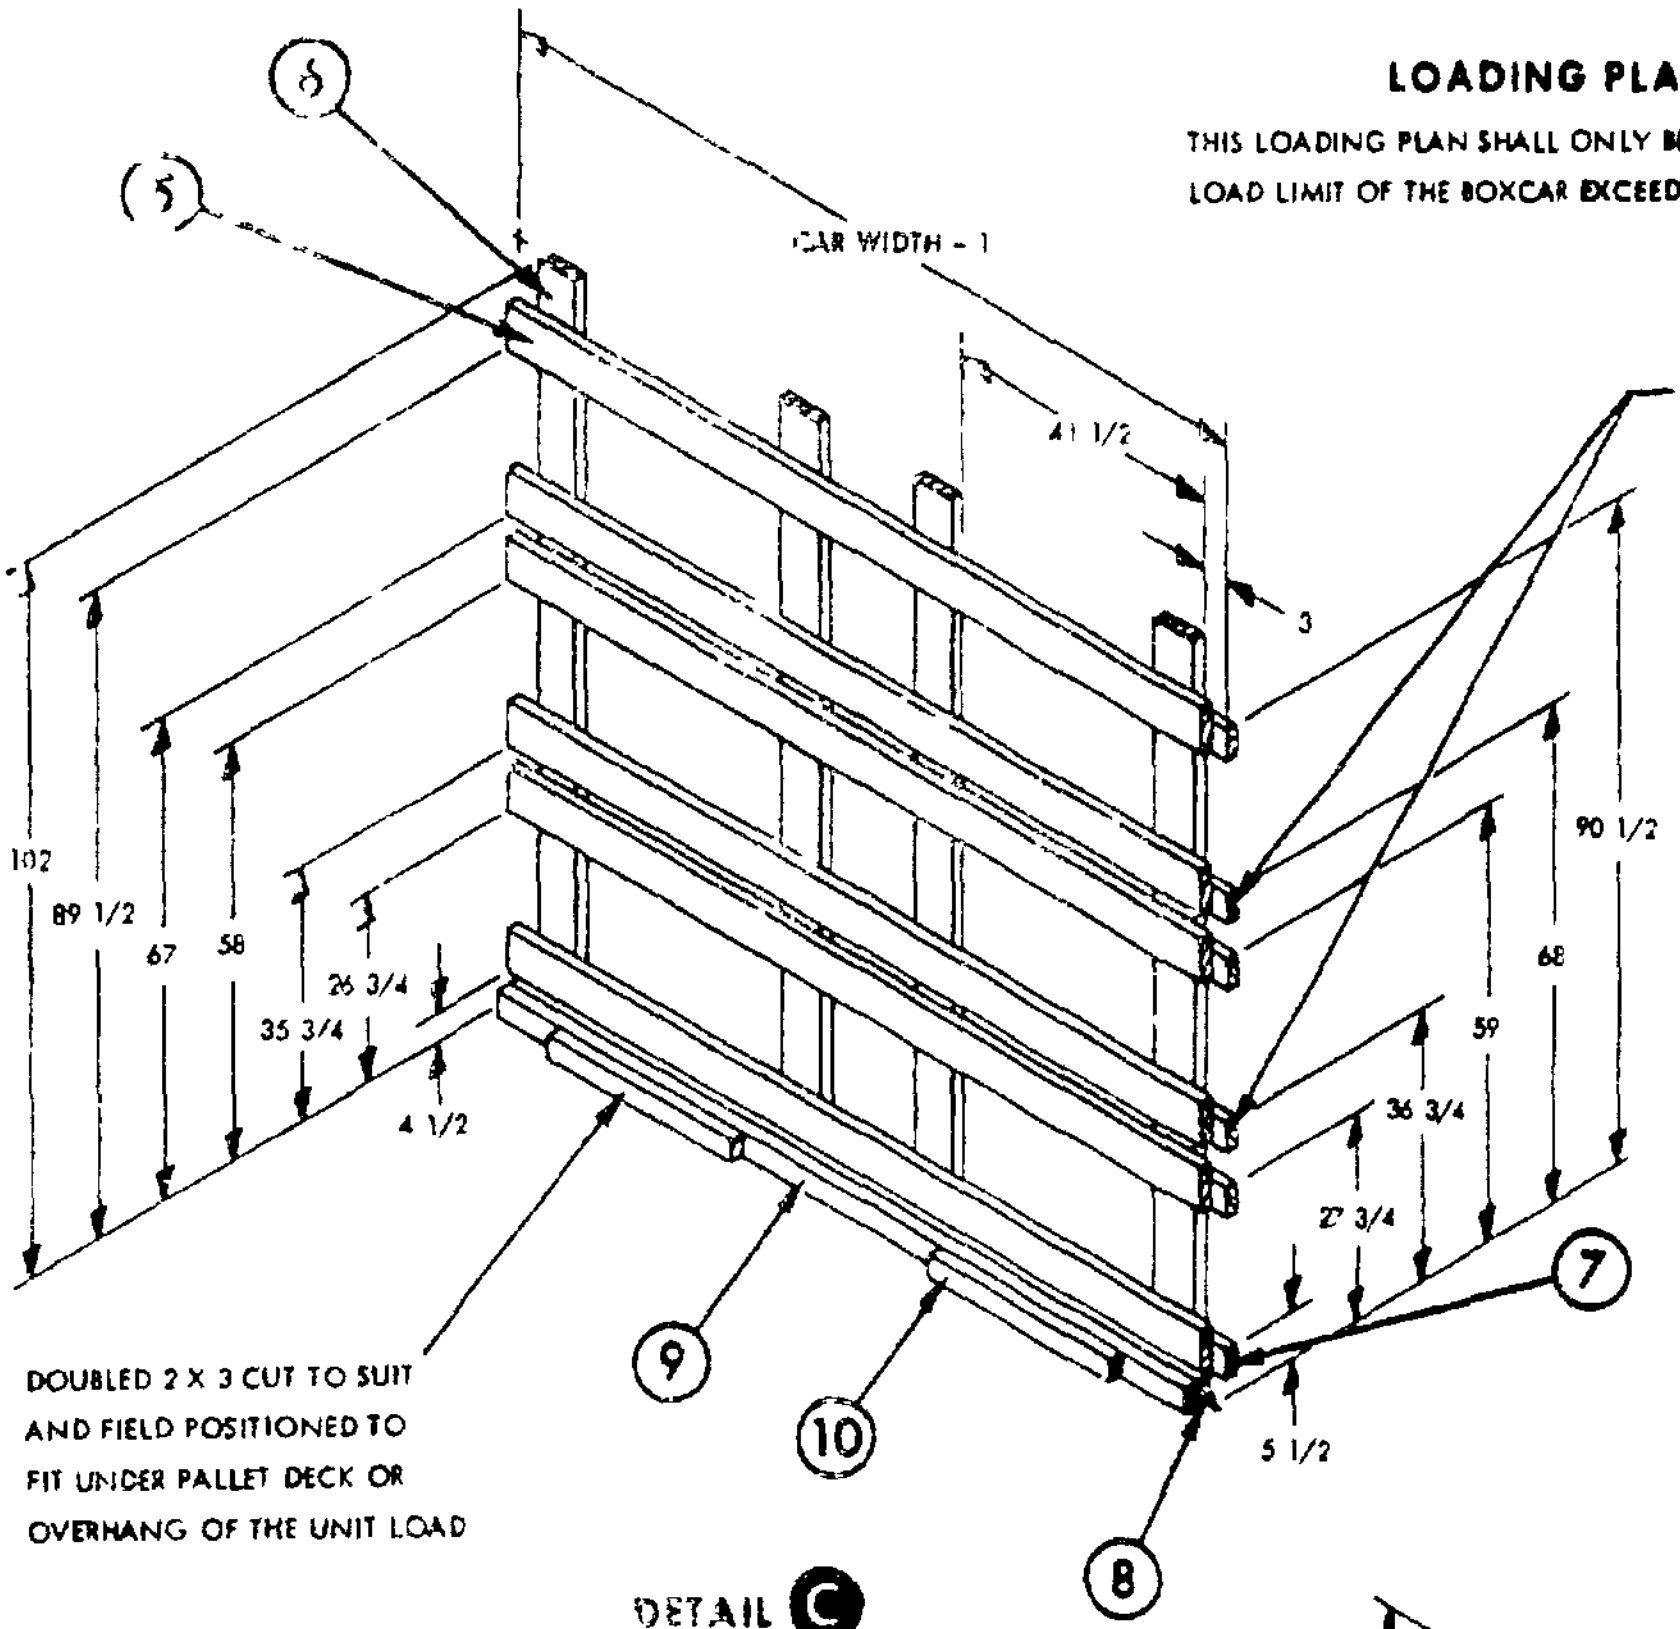

POSITION AFTER STRUTS HAVE BEEN INSTALLED ON LOWER STRUT CLEAT (REQUIRED ONE GATE ONLY)

DOUBLED 2 X 3 CUT TO SUIT AND FIELD POSITIONED TO FIT UNDER PALLET DECK OR OVERHANG OF THE UNIT LOAD

DETAIL C
CENTER GATE
2 REQUIRED



STRAPPING BOARD
1 X 4 X CUT TO FIT
NAIL TO EDGE OF
CROSS BRACE WITH
FOUR 10d NAILS

CROSS BRACE
2 X 4 X CUT TO FIT
SNUGLY BETWEEN
LATERALLY ADJACENT
PALLETS

DETAIL D
TOP SWAY BRACE

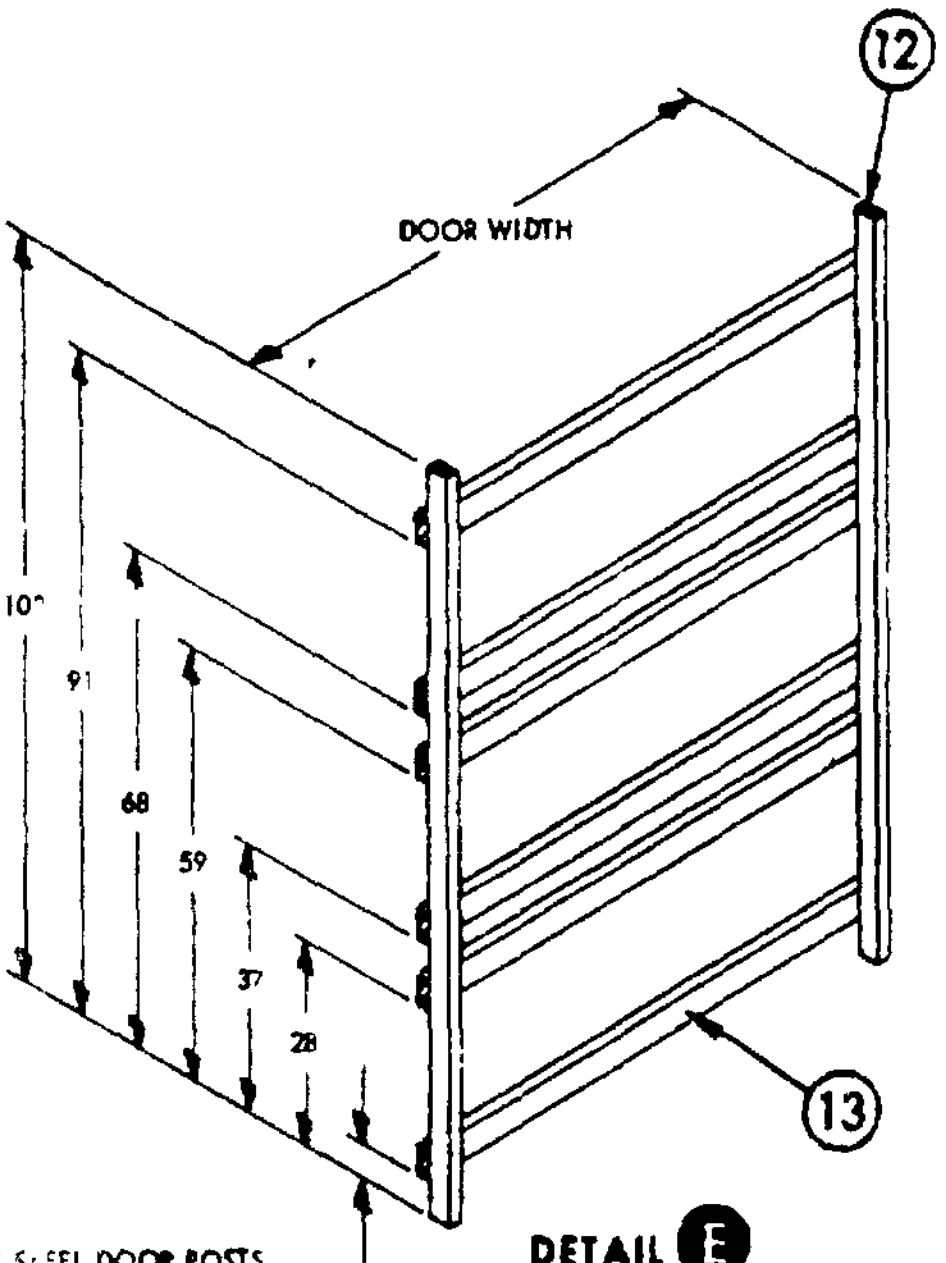

IF BOXCAR HAS STEEL DOOR POSTS
DOORWAY PROTECTION AS PER
MIL-STD-1325 (NAVY) IS REQUIRED

DETAIL E
DOORWAY PROTECTION
2 REQUIRED

THIS PAGE INTENTIONALLY LEFT BLANK

50 FT 6 IN BOXCAR, COMMERCIAL

1 THE CARLOAD CONSISTS OF 60 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING BOXCARS NOT HAVING THE LOAD CARRYING CAPACITY (LD LMT) FOR 60 UNIT LOADS MAY BE LOADED WITH A LESSER AMOUNT THE PROCEDURE SPECIFIED IN THIS DOCUMENT MUST BE FOLLOWED AS CLOSELY AS POSSIBLE IF A PARTIAL LAYER RESULTS PARTIAL LAYER OF LADING SHALL BE BRACED IN ACCORDANCE WITH MIL-STD-1325-100 (NAVY) OR MIL-STD-1325-102 (NAVY) SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED

2 WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS THE PARTIAL LAYER OF LADING SHALL BE BRACED BY MEANS OF END BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-102 (NAVY) SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH SEE MIL-STD-1325 (NAVY)

3 THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 10 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 10 FT WIDE

4 THE DEPICTED PROCEDURES AND METHODS OF BOLCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG DOORS PROVIDING STACKS WITH MORE THAN HALF OF THE UNIT LOAD IN THE DOORWAY AREA ARE UNITIZED WITH TWO LATERALLY APPLIED 1 1 4 IN STEEL STRAPS PER STACK EACH TENSIONED AND SEALED WITH TWO DOUBLE CRIMPED SEALS AND A TOP SWAY BRACE CONSISTING OF A STRAPPING BOARD AND CROSS BRACE TWO PER STACK (SEE DETAIL D) INSTALLED BETWEEN THE ROWS OF THE DOORWAY STACKS EACH STRAP IS SECURED TO STRAPPING BOARD WITH TWO 1 1/4 IN STAPLES DUNNAGE MATERIAL MUST NOT BE NAILED TO ANY PLUG DOOR WHETHER MAIN OR AUXILIARY EXCEPT WHEN THE CAR HAS A COMBINATION OF A CONVENTIONAL SLIDING TYPE DOOR AND A PLUG TYPE DOOR AND AN ADEQUATE NAILING STRIP IS PROVIDED ON THE PLUG TYPE DOOR IF LUMBER OF SUFFICIENT LENGTH TO SPAN PLUG DOORS IS NOT AVAILABLE RANDOM LENGTH MATERIAL DOUBLED AND SPLICED BUT WITH JOINTS OF SPLICED OFFSET MAY BE USED DIMENSIONAL LUMBER DOORWAY PROTECTION PIECES 12 AND 13 IS NOT REQUIRED WHEN PLUG DOOR EQUIPPED BOXCARS ARE USED EXCEPT WHEN CAR HAS A COMBINATION OF PLUG DOOR AND CONVENTIONAL SLIDING DOOR THEN DIMENSIONAL LUMBER DOORWAY PROTECTION IS REQUIRED FOR THE CONVENTIONAL DOOR PLUG DOORS MUST BE SECURELY CLOSED AND WIRED TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER

* USE SWAY BRACE ASSEMBLY DETAIL A FOR STEEL FLOOR CARS

** W = DISTANCE BETWEEN LEGS OF PALLETS ACROSS THE CAR

*** PIECE 3 NAILS TO PIECE 4 WITH 10d NAILS CLINCHED 3 PER JOINT AND TO PIECE 2 WITH 6d NAILS 1 PER JOINT

**** 2 X 6 STRUTS DOUBLED AND LAMINATED WITH 10d NAILS MAY BE SUBSTITUTED IN PLACE OF 4 X 4 s

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ D	NAIL TO	NAILS NUMBER	NAILS SIZE
17	CROSS PIECE	2 X 4 X CUT TO FIT	8	SEE 16	-	-
16	SUPPORT PIECE	1 X 4 X CUT TO FIT	8	17	4 SEE FIELD	10d NOTE
15	VERTICAL TIE BAR	2 X 4 X 96	4	11	3 PER JOINT	10d
14	HORIZONTAL TIE BAR	2 X 4 X CAR WIDTH - 4	6	11	3 PER JOINT	10d
13	HORIZONTAL DOORWAY MEMBER	2 X 4 X DOOR WIDTH	12	12	2 PER JOINT	10d
12	VERTICAL DOORWAY MEMBER	2 X 3 X 102	4	DOOR POST	2 PER FOOT	20d
11	STRUT	4 X 4 X **** WEDGE FIT	24	6	2 PER FOOT	16d
10	HOLD DOWN CLEAT	2 X 3 X CUT TO FIT	4	9	4	16d
9	HOLD DOWN CLEAT	2 X 3 X CUT TO FIT	4	8	4	10d
8	HOLD DOWN SPACER	2 X 4 X CAR WIDTH 1	2	6	3 PER JOINT	10d
7	CENTER GATE STRUT CLEAT	2 X 4 X CAR WIDTH - 1	12	6	3 PER JOINT	10d
6	CENTER GATE VERTICAL	2 X 6 X 102	8	SEE 5, 7, 8		-
5	CENTER GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	12	6	3 PER JOINT	10d
4	CROSS BRACE	2 X 6 X W**	60	SEE 3	-	-
3	SWAY BRACE LONGITUDINAL	1 X 4 X 53	40	1 3	SEE NOTE	***
2	SWAY BRACE SUPPORT	1 X 4 X (W 8)**	40	SEE 3	-	-
1	SLEEPER	2 X 4 X 57*	20	CAR FLOOR	2 PER FOOT	16d

LIST OF MATERIALS & NAILING DATA

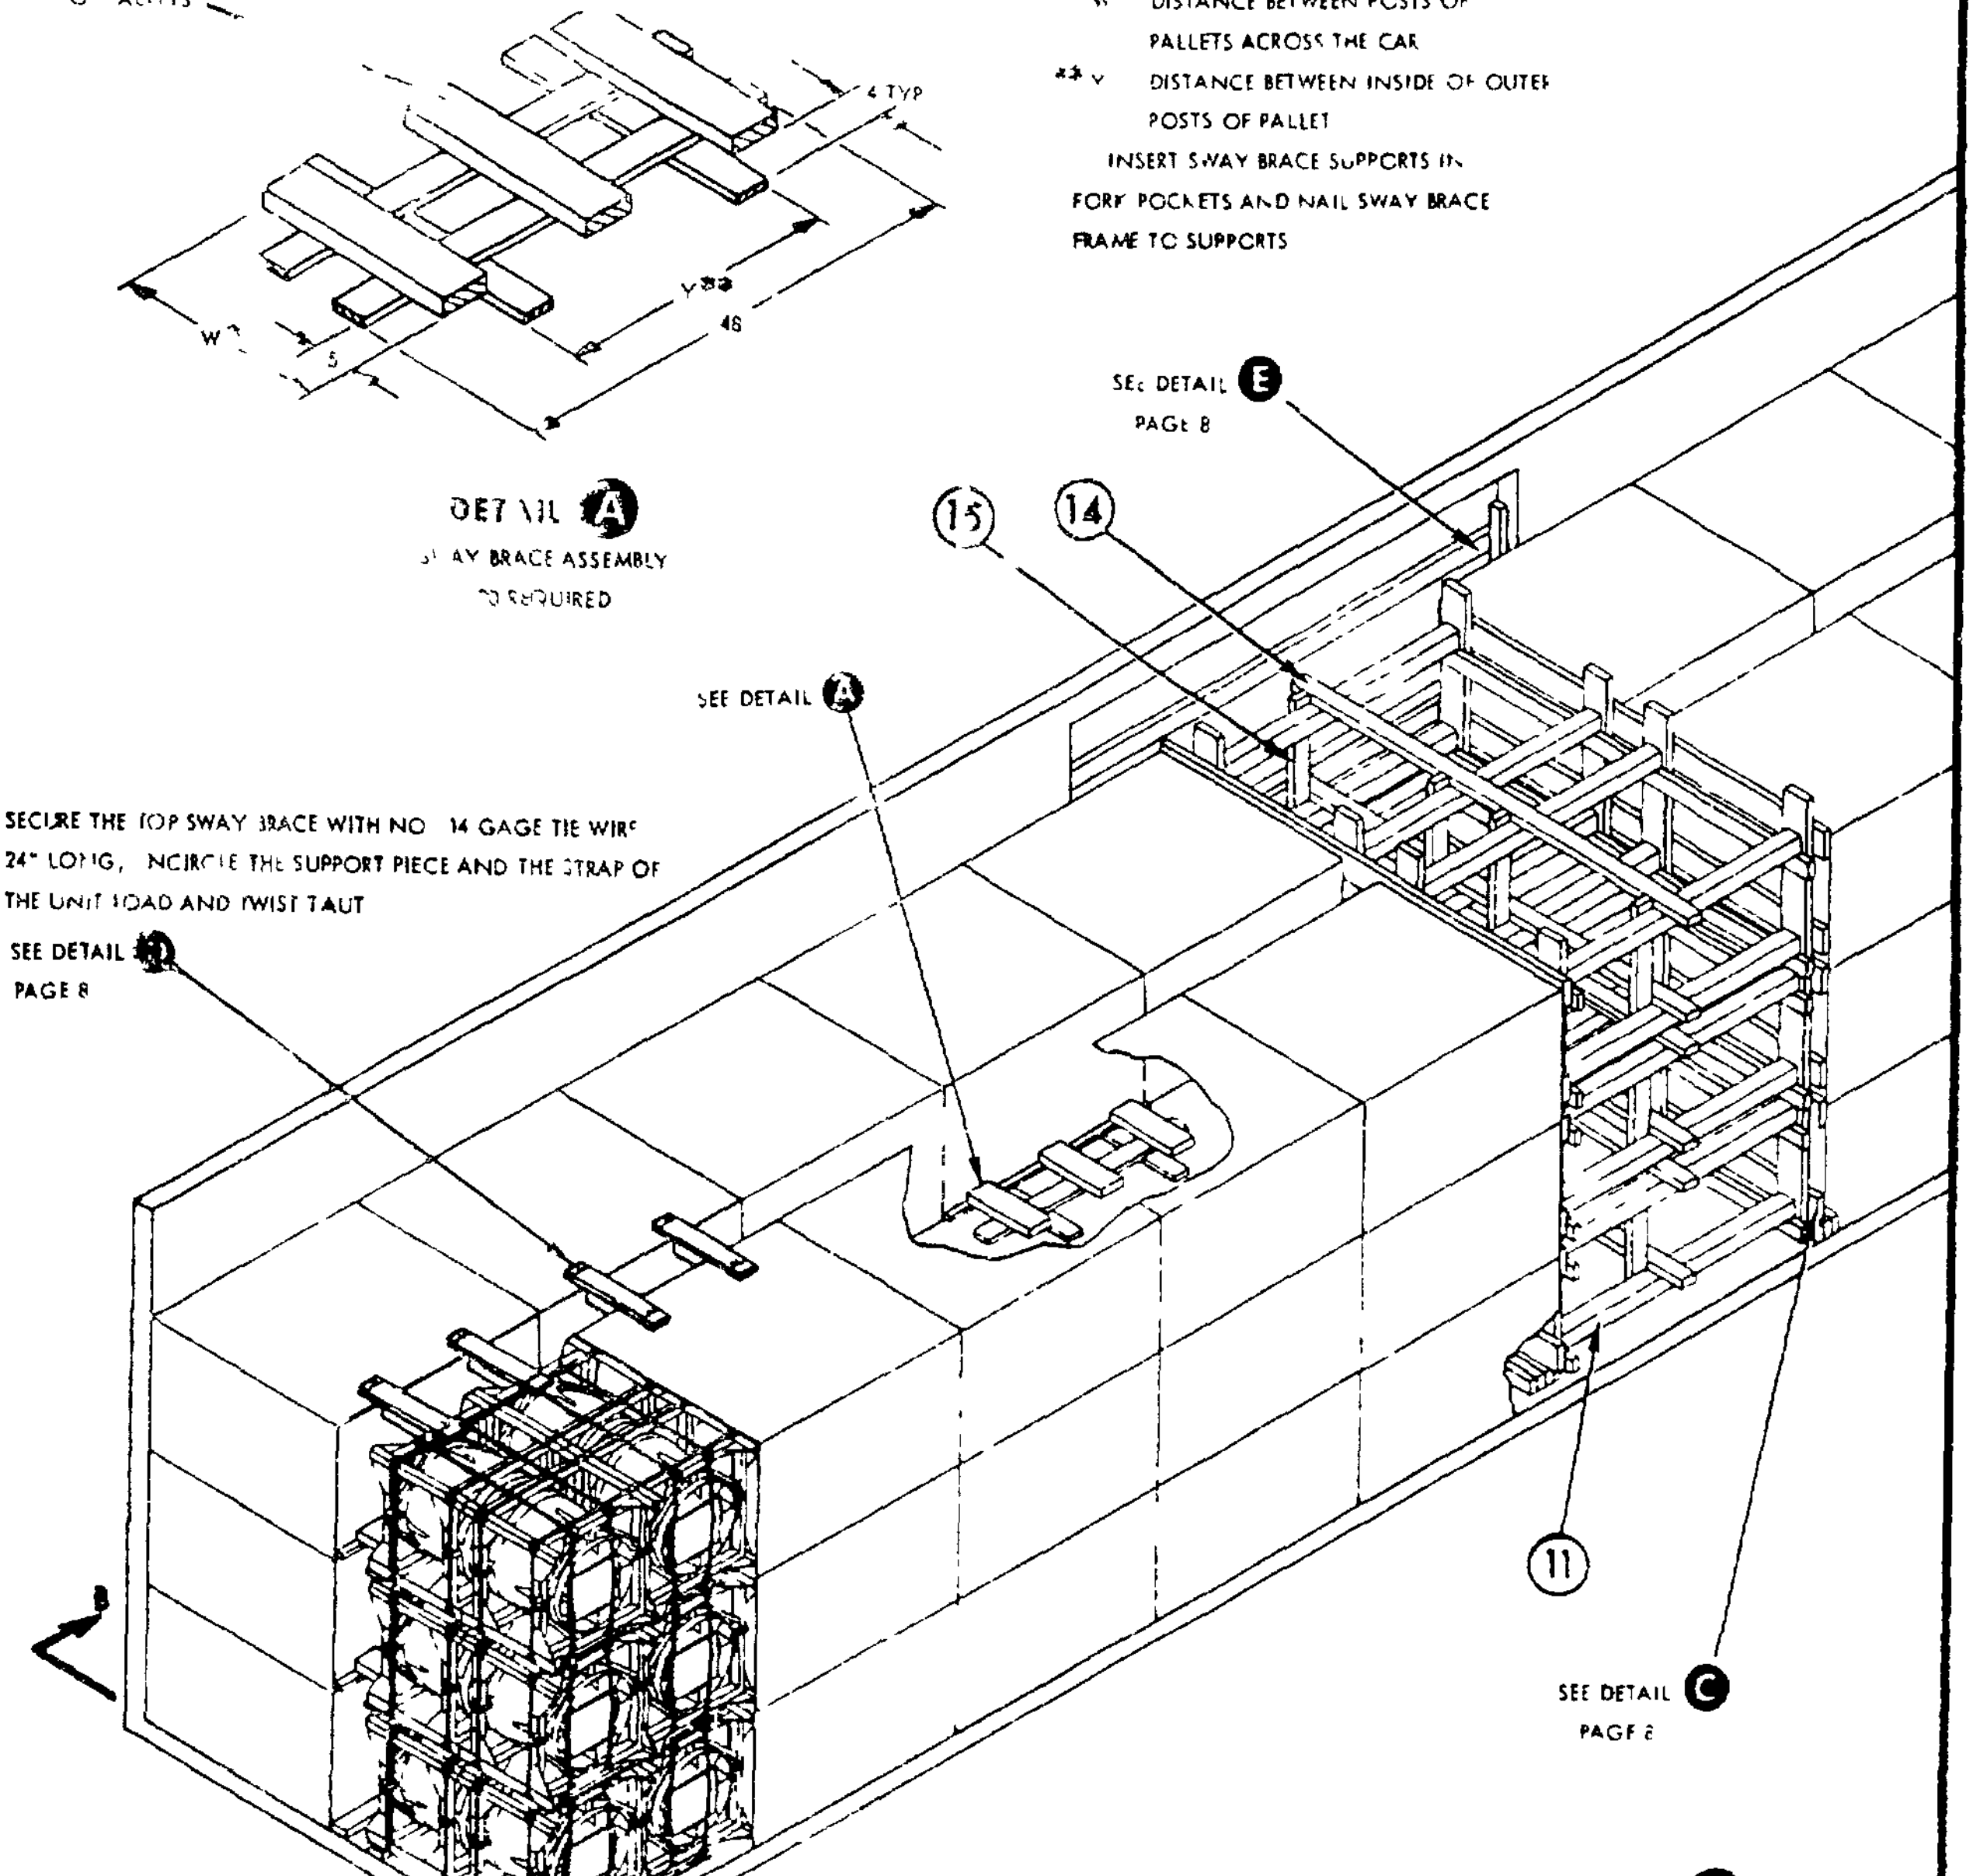

'OSS 8? [illegible] S MUST B'
CENTERED AGAINST L[illegible]
O[illegible] PALLETS

* W DISTANCE BETWEEN POSTS OF
PALLETS ACROSS THE CAR

** Y DISTANCE BETWEEN INSIDE OF OUTER
POSTS OF PALLET

INSERT SWAY BRACE SUPPORTS IN
FORK POCKETS AND NAIL SWAY BRACE
FRAME TO SUPPORTS

DETAIL A
SWAY BRACE ASSEMBLY
[illegible] REQUIRED

SECURE THE TOP SWAY BRACE WITH NO 14 GAGE TIE WIRE
24" LONG, ENCIRCLE THE SUPPORT PIECE AND THE STRAP OF
THE UNIT LOAD AND TWIST TAUT

CARLOAD DATA

NUMBER OF UNIT LOADS	60
LOAD WEIGHT (APPPOX)	148 440 LBS
DUNNAGE WEIGHT (APPROX)	1 990 LBS
CARLOAD [illegible] (APP[illegible]X)	50 430 LBS

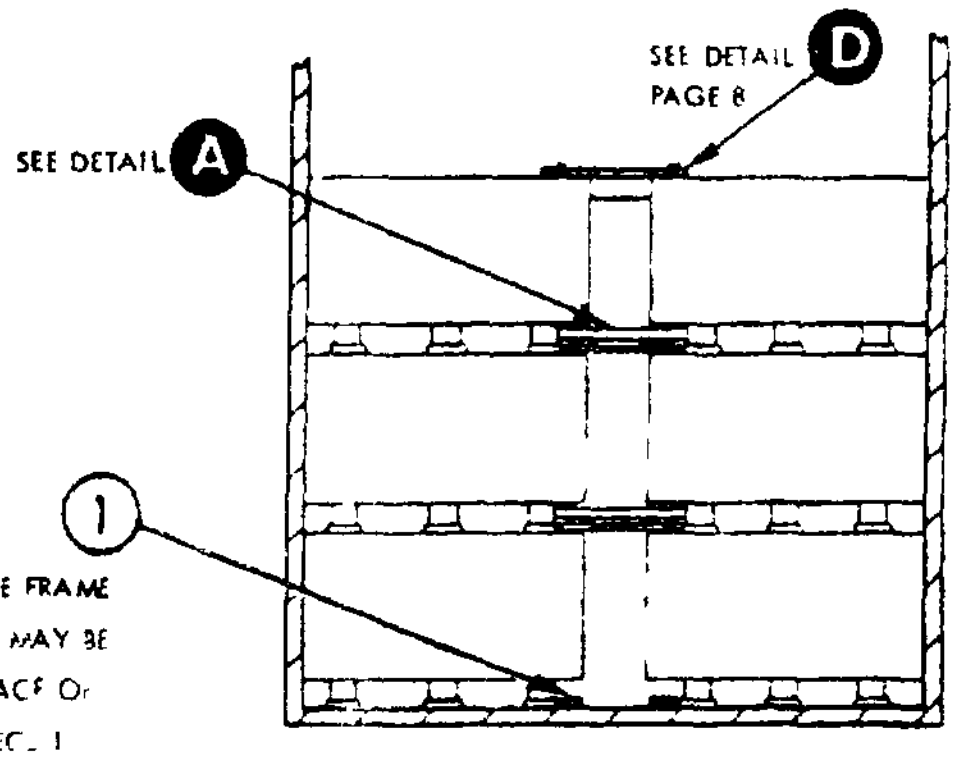

WAY BRACE FRAME
TAIL A MAY BE
ED IN PLACE OF
[illegible] RS [illegible]EC[illegible] 1

SECTION B-B

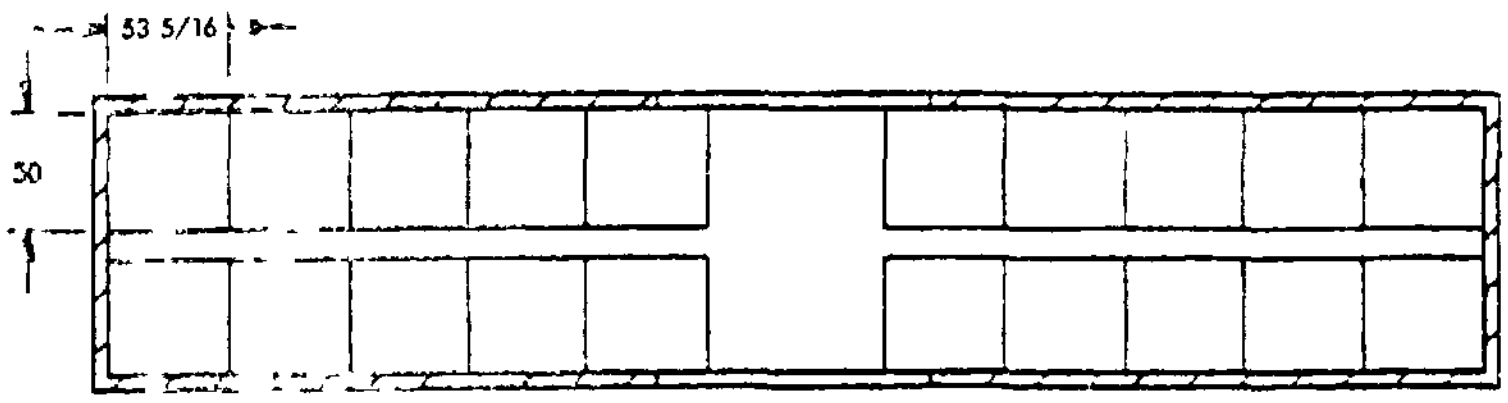

LOADING PLAN

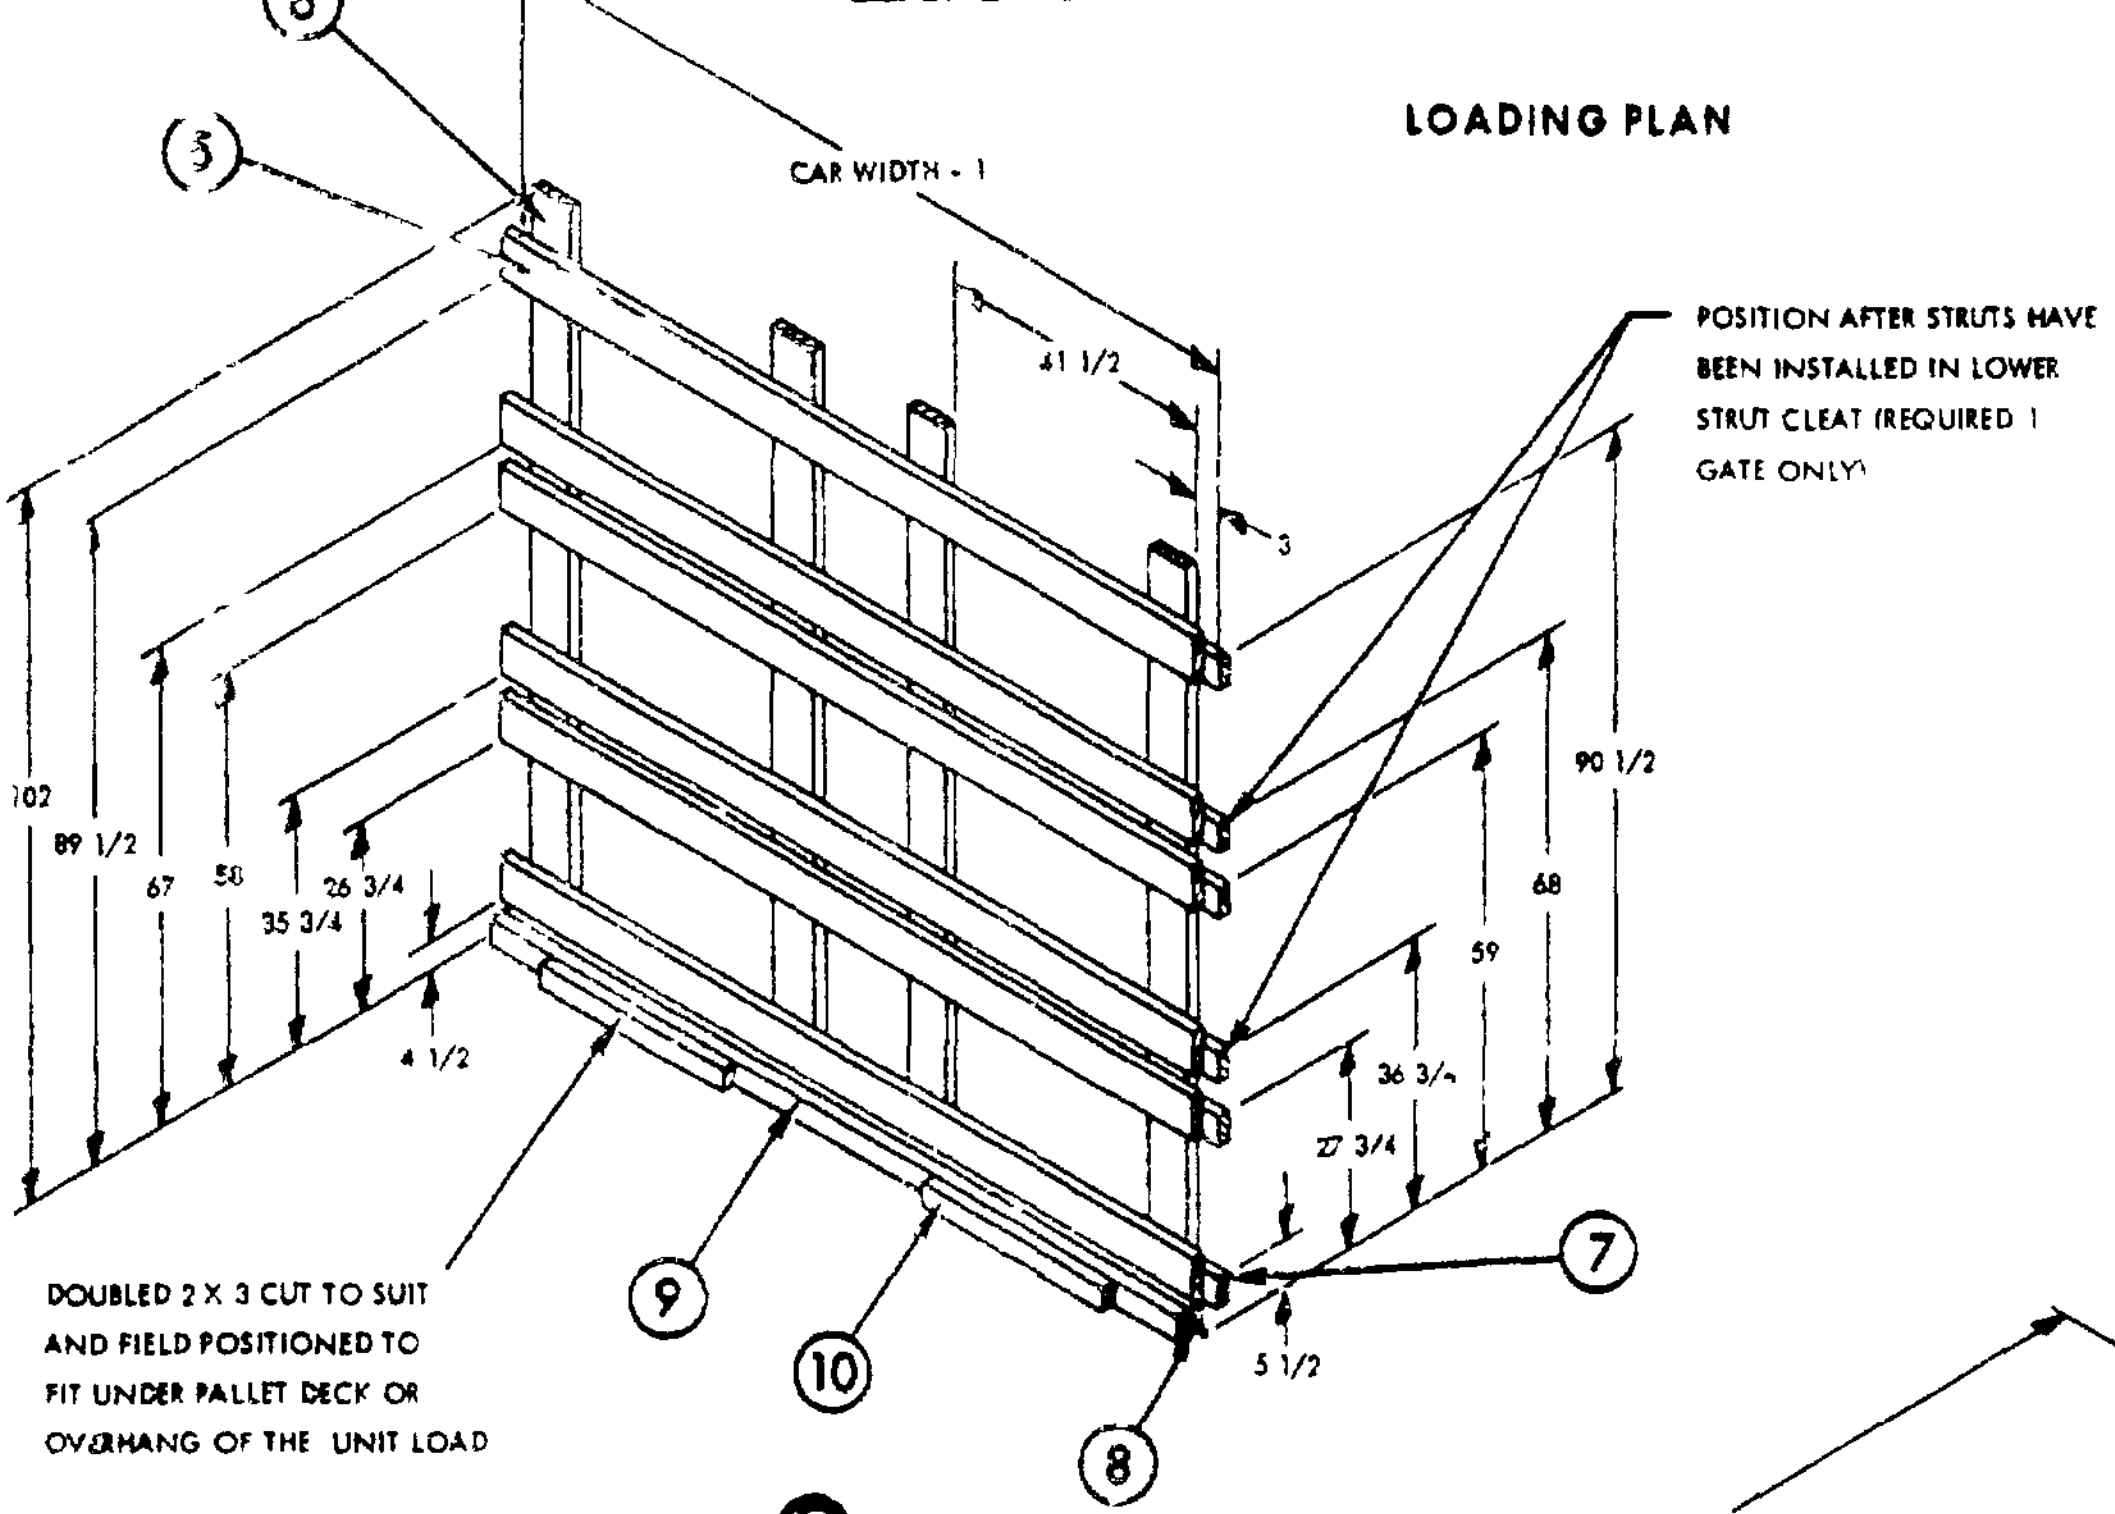
6
5
CAR WIDTH - 1
41 1/2
3
POSITION AFTER STRUTS HAVE BEEN INSTALLED IN LOWER STRUT CLEAT (REQUIRED 1 GATE ONLY)
102
89 1/2
67
58
35 3/4
26 3/4
4 1/2
90 1/2
68
59
36 3/4
27 3/4
5 1/2
7
DOUBLED 2 X 3 CUT TO SUIT AND FIELD POSITIONED TO FIT UNDER PALLET DECK OR OVERHANG OF THE UNIT LOAD
9
10
8

DETAIL C
CENTER GATE
2 REQUIRED

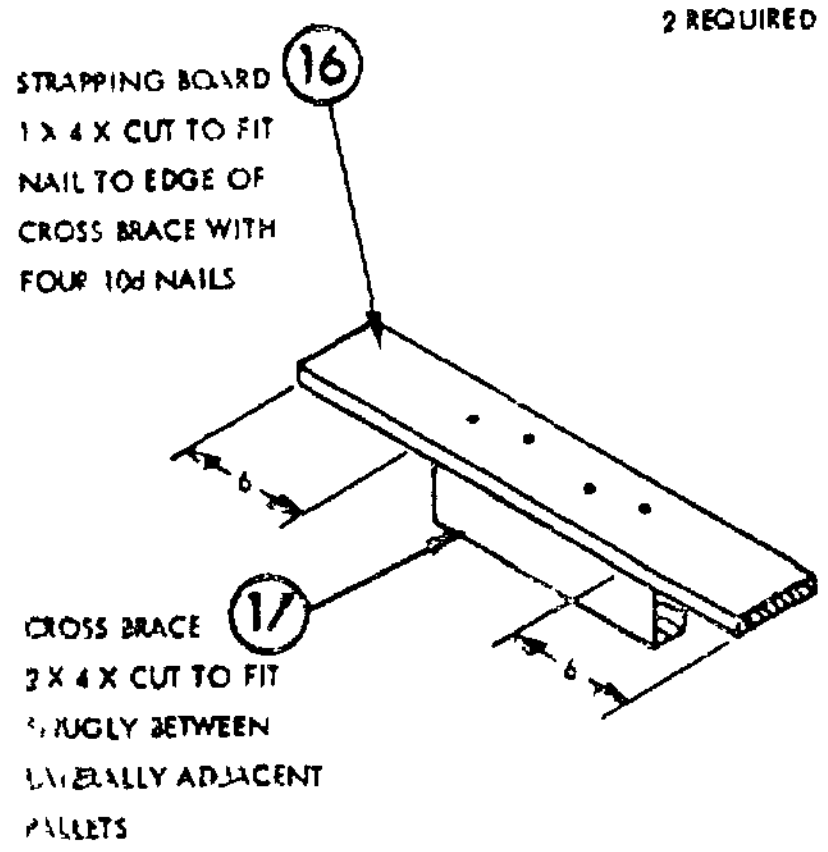
STRAPPING BOARD 1 X 4 X CUT TO FIT NAIL TO EDGE OF CROSS BRACE WITH FOUR 10d NAILS
16
6
6
CROSS BRACE 2 X 4 X CUT TO FIT SNUGLY BETWEEN LATERALLY ADJACENT PALLETS
17

DETAIL D
TOP SWAY BRACE

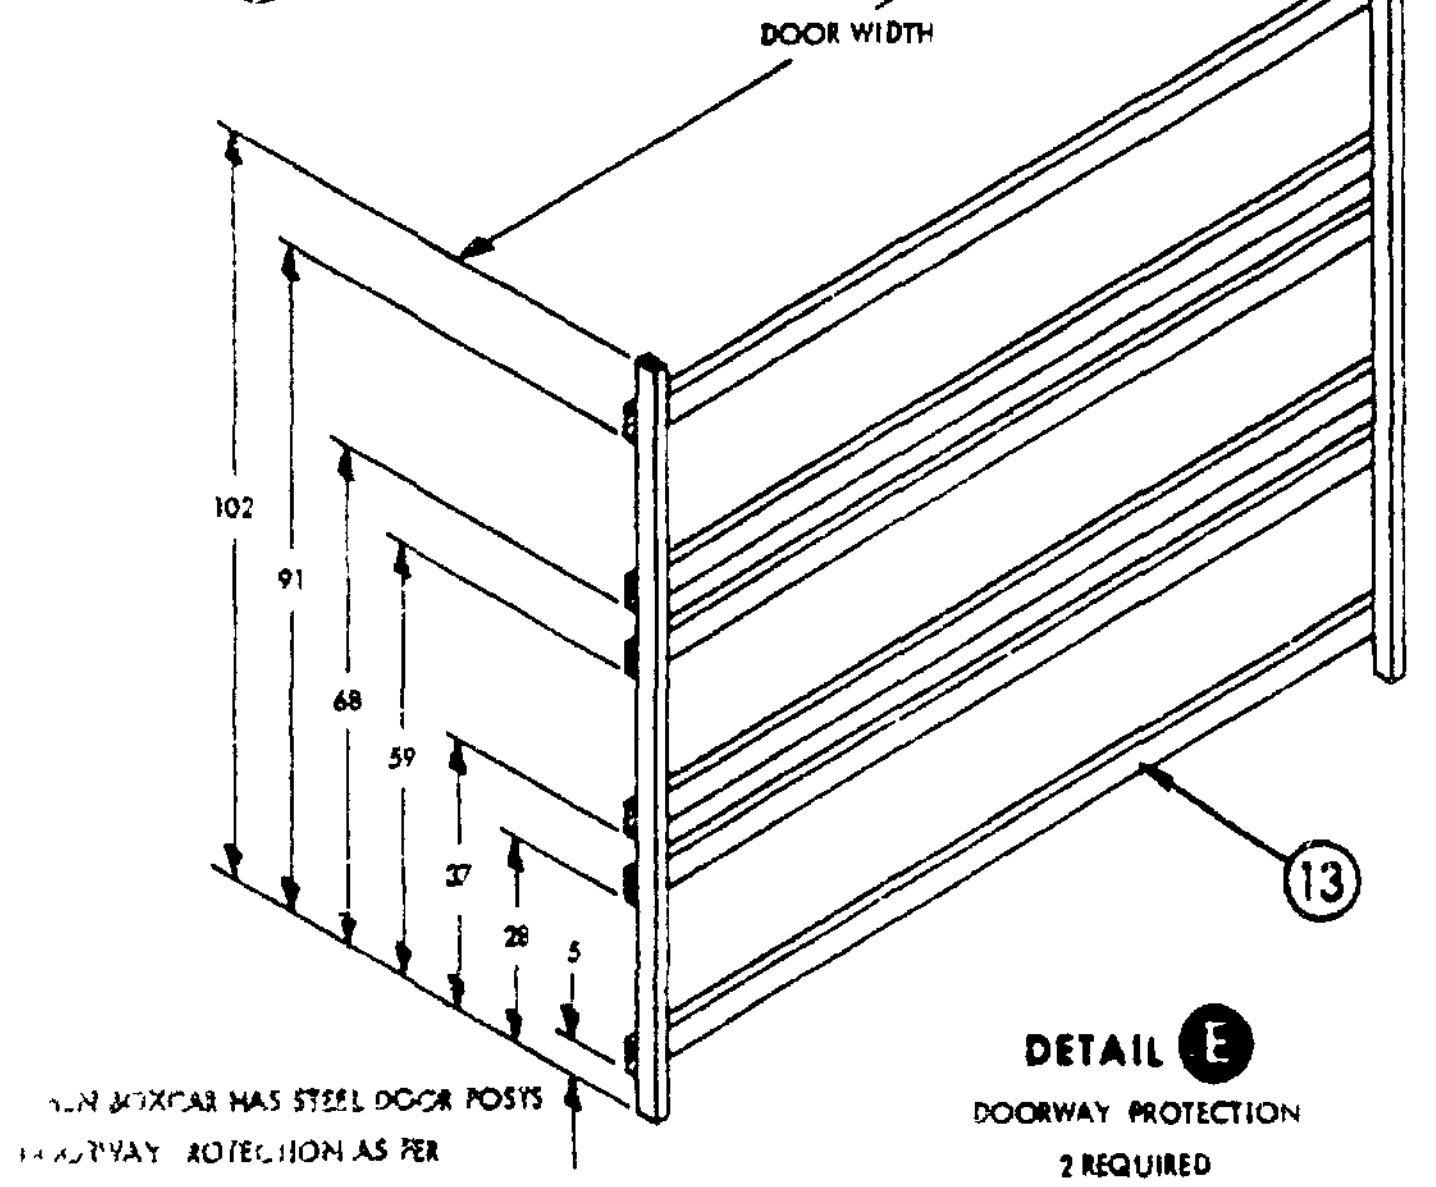

WHEN BOXCAR HAS STEEL DOOR POSTS DOORWAY PROTECTION AS PER MIL-STD-1325 (NAVY) IS REQUIRED

DETAIL E
DOORWAY PROTECTION
2 REQUIRED

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO 8140 - N319)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-STD-1325-97 (Navy)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426 [illegible] EDITION OF 1 JAN 66 [illegible] USED [illegible]

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDING OFFICER
NAVAL WEAPONS STATION EARLE
NAVAL WEAPONS HANDLING LABORATORY
COLTS NECK, NEW JERSEY 07722

FOLD