MILITARY STANDARD

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS


AIRCRAFT FLARE MLU 32/B99 (BRITEYE) FLEET ISSUE UNIT LOAD

MIL-STD-1386-23 (NAVY)

1 JUNE 1973

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/94
DIMENSIONS	70 3/4 L x 46 5/8 W x 44 3/8 H
CUBE	83.5 CU FT
WEIGHT	2,476 LB
DOT HAZARD CLASSIFICATION	EXPLOSIVES B
COAST GUARD CLASS	II-C

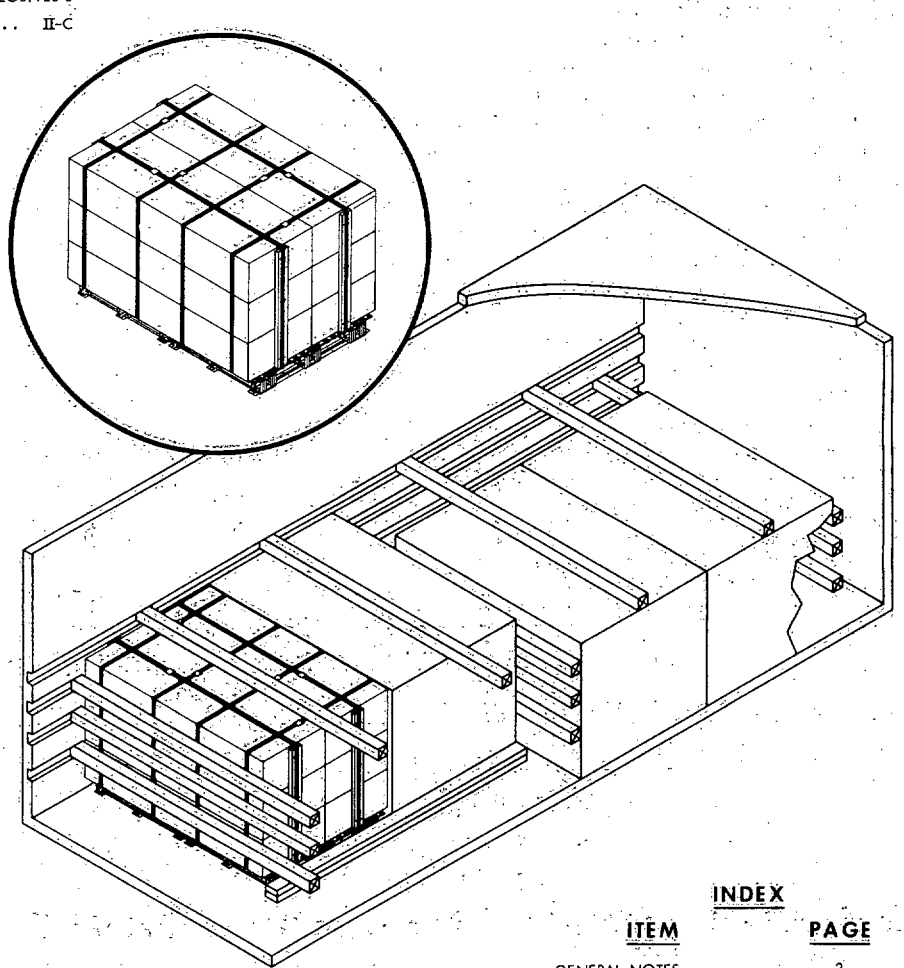

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINER-SHIP AND HIGHWAY	2 & 3

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

APPROVED BY US COAST GUARD

W Gschwind CAPT USCG
SIGNATURE

DATE 4-30-73

APPROVED BY BUREAU OF EXPLOSIVES

A. F. Grasmuck
SIGNATURE

DATE 4/24/73

W.S. Gray - NWHL
SIGNATURE TECHNICAL DIRECTION AGENT (TDA)

5/14/73
DATE

J. C. Cook
SIGNATURE AIR SYSCOM BY DIRECTION

5/17/73
DATE

ORIGINATOR L.R. Cavinga
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAVAL AMMUNITION DEPOT, EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T0[illegible]
Check the source to verify that this is the current version before use.


GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF AIRCRAFT FLARES MLU 32/B99 (BRITEYE). THE FLARES SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54/94.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6 C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6 C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.
5. WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL C.
6. THE VOID BETWEEN THE HOLD DOWN CROSSMEMBER AND THE TOP OF THE UNIT LOAD SHALL NOT EXCEED ONE HALF INCH. IF REQUIRED, SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL D.
7. VARIATIONS IN UNIT LOAD AND BELT RAIL HEIGHT MAY MAKE IT IMPOSSIBLE TO USE A CROSSMEMBER AS A HOLD DOWN ON THE 48 INCH HIGH BELT RAIL. IF THIS OCCURS, EACH BAY OF FLARES IS TOMMED DOWN WITH TWO 1 1/4 x .035 STEEL STRAPS. THE STRAPS ARE ATTACHED TO THE CROSSMEMBERS AS SHOWN IN DETAIL A. LOCATE SEALS WITH A CROSSMEMBER BETWEEN THE SEAL AND THE STRAP ENCIRCLED CROSSMEMBER AS SHOWN IN THE BUBBLE OF THE STRAPPING DIAGRAM, DETAIL A. SECURE EACH END OF THE STRAP WITH TWO SEALS, BUTTED TOGETHER, WITH TWO PAIR OF CRIMPS PER SEAL.
8. APPLICABLE MATERIAL SPECIFICATIONS:
   - DUNNAGE LUMBER - FED. SPEC. MM-L-751
   - NAILS - FED. SPEC. FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT
   - STRAP - FED SPEC. QQ-S-781, TYPE I, CLASS A
   - PLYWOOD - COMMERCIAL STANDARD CS45, GRADE INTERIOR C-D.
9. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL. I).

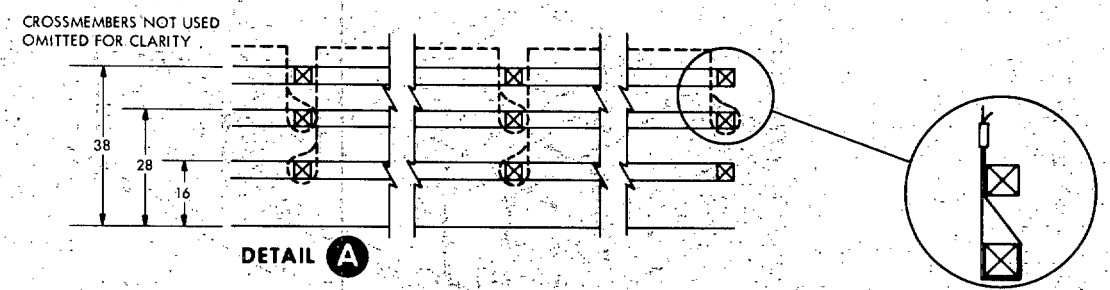

DETAIL A

ALTERNATE HOLD DOWN METHOD
SEE GENERAL NOTE 7

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

1. THE CONTAINERLOAD CONSISTS OF 16 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.
2. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS:
   A. ONE CONTAINER ON 20-FT MILVAN CHASSIS WITH A DOUBLE BOGIE LOCATED IN THE NEXT TO LAST HOLE AND PULLED BY A SINGLE OR DOUBLE DRIVE AXLE TRACTOR.
   B. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH TWO BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
3. ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY. CONTAINERS MUST BE ADEQUATELY SECURED TO THE EQUIPMENT.
4. THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC. WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED:
   A. ONE CONTAINER ON 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.
   B. TWO CONTAINERS ON 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.


WARNING

CHASSIS/CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR. THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END. 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR.


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

CONTAINER LOAD DATA


NUMBER OF UNIT LOADS	4
NUMBER OF CROSSMEMBERS REQ'D	13
LOAD WEIGHT	9,904 LBS
DUNNAGE WEIGHT	51 LBS
CONTAINER WEIGHT	5,785 LBS
GROSS WEIGHT	15,740 LBS

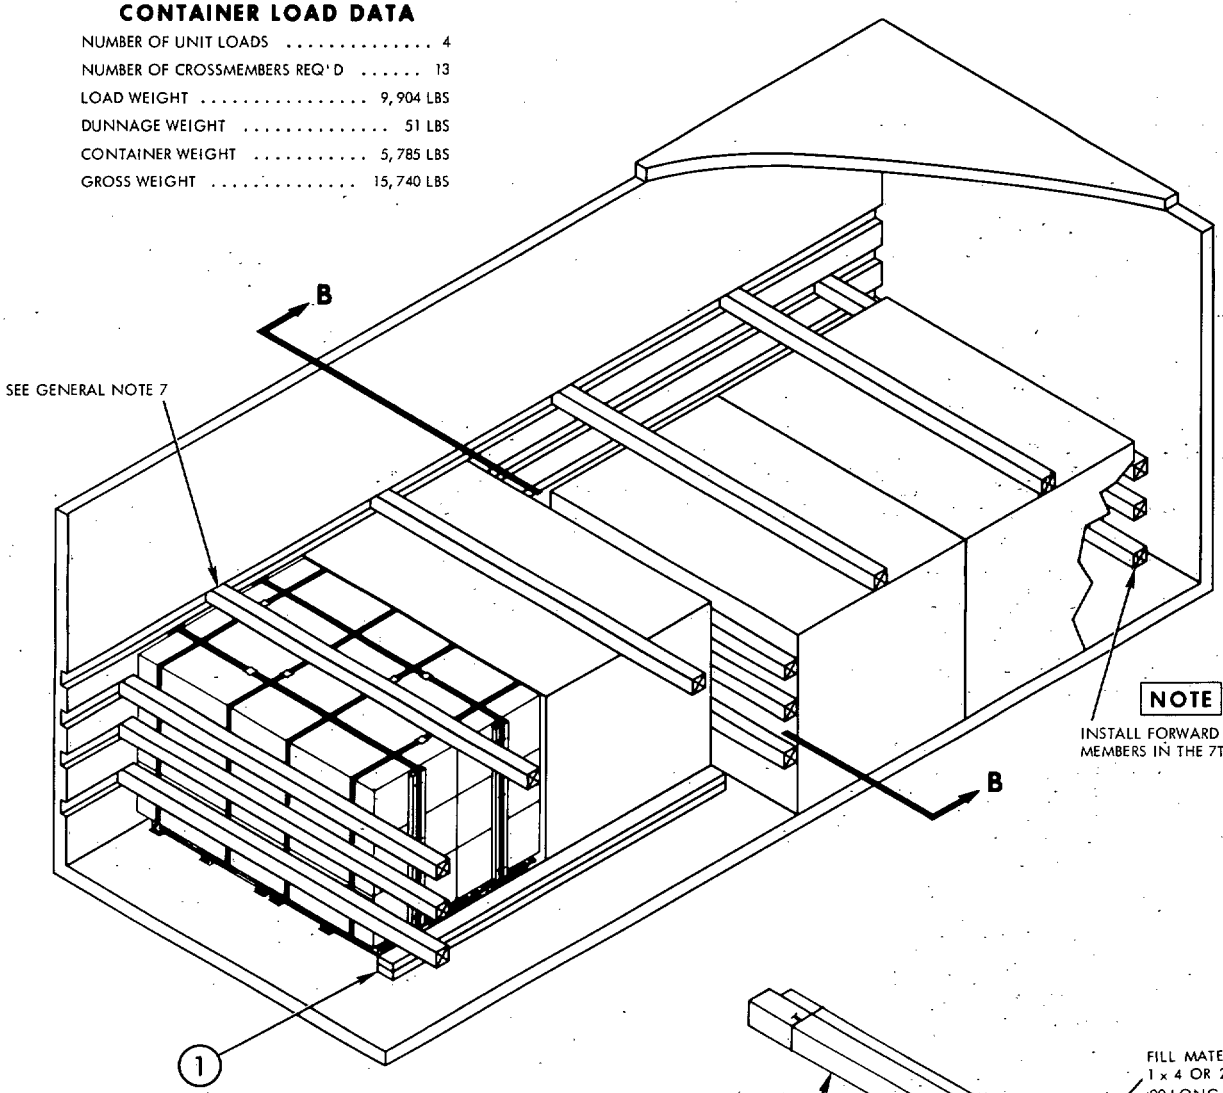


1 2 x 4 x 92 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. (TWO PLACES)

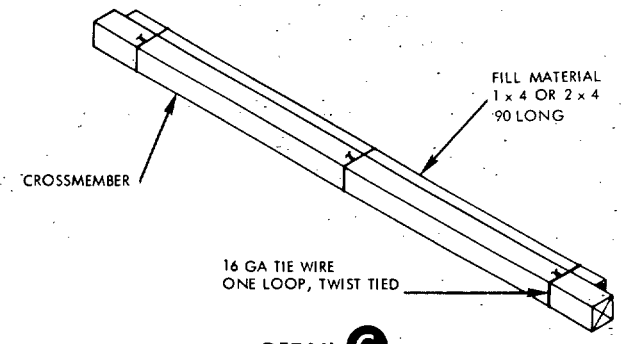

DETAIL C
FILL MATERIAL
SEE GENERAL NOTE 5

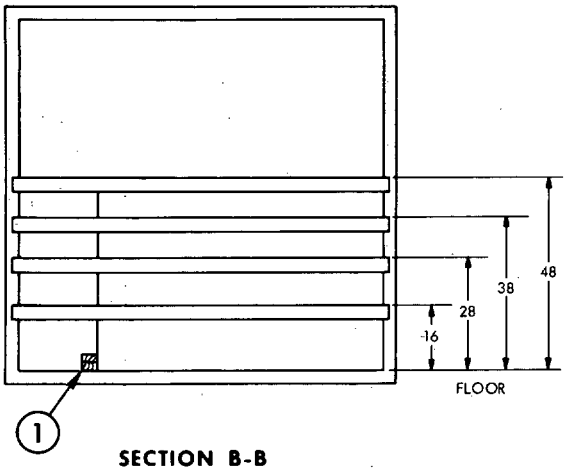

SECTION B-B

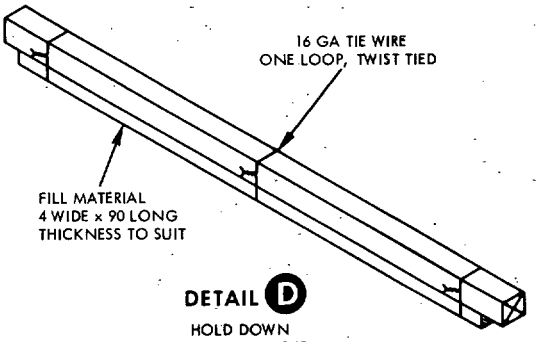

DETAIL D
HOLD DOWN
SEE GENERAL NOTE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.