INCH- POUND
A-A-970A
November 14, 1994
SUPERSEDING
A-A-970
February 21, 1984

COMMERCIAL ITEM DESCRIPTION

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for type I, class 1 size 12 and type II, class 2, size 11 of GGG-B-800 for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers bush hooks which are used to cut heavy brush.

2. CLASSIFICATION

2.1 Classification. The bush hooks shall be of the following types, as specified (see 7.2) :

Type I - Ax Eye Bush Hook

Type 11 - Eye and Strap Bush Hook

3. SALIENT CHARACTERISTICS

3.1 Blades. The blades shall be manufactured from high carbon steel which has been heat treated to a Rockwell C hardness of 45 to 56 when tested in accordance with ASTM E18. The blades shall be flat or convex in cross-section. Cutting edges shall be ground to a keen edge and ready for immediate use. The type I bush hook cutting edge may have an unground section next to the top of the eye not to exceed a length of 3/4 inch (1.9 cm). Surfaces, with the exception of the ground cutting edge(s), shall be protected with a coating of paint, varnish, enamel, lacquer, polyurethane, or similar substance. The cutting edge(s) shall be coated with clear varnish, lacquer; polyurethane, or rust-preventative oil.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

FSC 3750

Distribution Statement A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:11Z
Check the source to verify that this is the current version before use.

3.2 Handle. The bush hooks shall have a wood handle. The wood shall be sound, thoroughly seasoned straight-grained hickory or equivalent hardwood. The handle shall be coated with a transparent protective finish such as lacquer, varnish, or polyurethane. The handle shall be driven through and finished flush with the top of the eye. The handle shall measure from 34-1/2 to 36-1/2 inches (0.88 to 0.93 m) in overall length. The handle for the type I bush hook shall be a straight, single-bit ax design. The handle for the type II bush hook shall be a curved, single-bit ax design.

3.3 Type I, Ax Eye Bush Hook. The type I ax eye bush hook shall be similar in appearance to Figure 1 and shall have the dimensions listed in Table I. The steel eye member shall be finished flush with the heel end of the blade. The head shall weigh 3 ± 1/4 lbs (1.4 ± 0.1 kg).

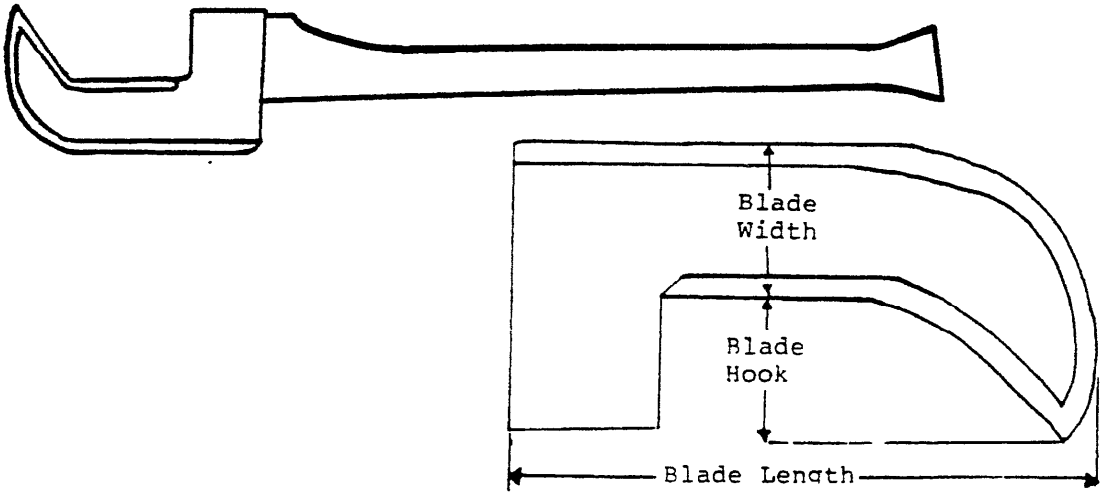


Figure 1 - Type I, Ax Eye Bush Hook

Table I - Ax Eye Bush Hook

Blade Length	Blade Width	Blade Hook	Cutting Edge
12 ± 1/2	3-1/8 ± 3/8	3 ± 3/8	25-1/2 ± 1
(30.5 ± 1.3 cm)	(7.9 ± 1.0 cm)	(7.6 ± 1.0 cm)	(64.8 ± 2.5 cm)

Note: All dimensions are listed in inches unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:11Z
Check the source to verify that this is the current version before use.

3.4 Type II, Eye and Strap Bush Hook. The type II eye and strap bush hook shall be similar in appearance to Figure 2 and shall have the dimensions listed in Table II. The steel eye member shall be joined to the mid-length of the back edge of the blade. The steel strap shall be through-bolted to the blade. The strap shall be fitted around the handle crown end to securely hold the handle in the eye. The head shall weigh 3 ± 3/8 lbs (1.4 ± 0.15 kg).

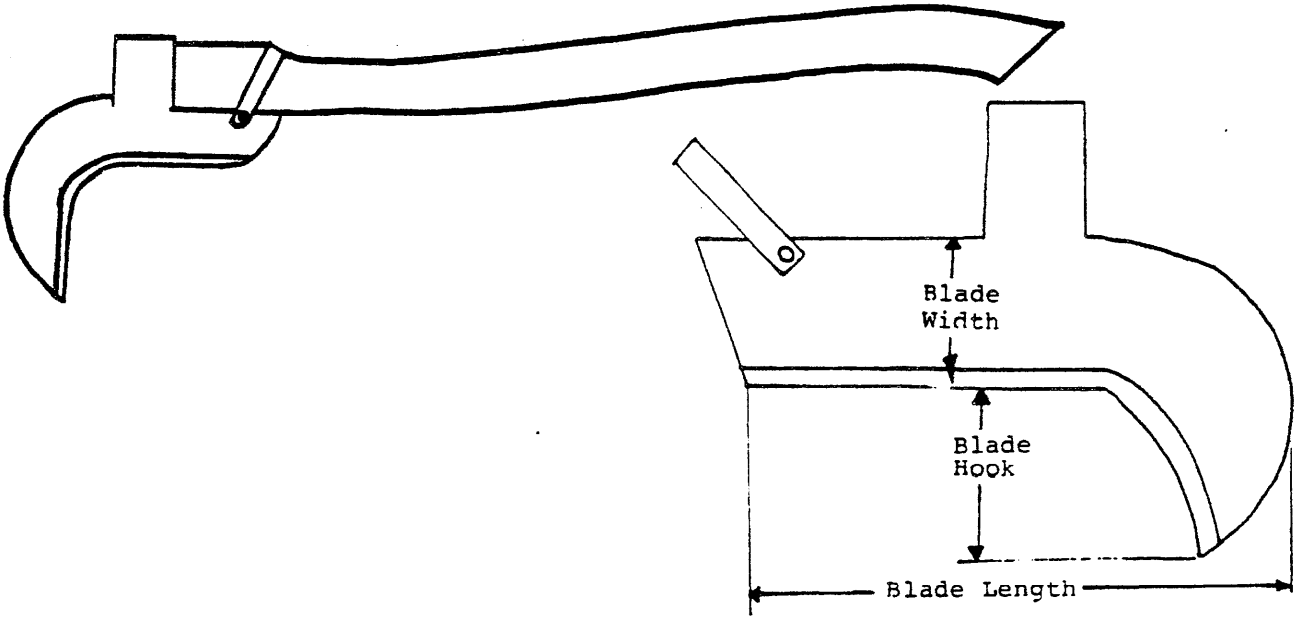


Figure 2 - Eye and Strap Bush Hook

Table II - Eye and Strap Bush Hook

Blade Length	Blade Width	Blade Hook	Cutting Edge
11-1/2 ± 3/4	3 ± 1/2	3-1/4 ± 1/2	11-1/2 ± 1
(29.2 ± 1.9 cm)	(7.6 ± 1.3 cm)	(8.3 ± 1.3 cm)	(29.2 ± 2.5 cm)

Note: All dimensions are listed in inches unless otherwise specified.

3.5 Identification marking. The bush hooks shall be marked with the manufacturer's name or trademark.

3.6 Performance requirements. The eye member and blade juncture shall withstand without damage a 150 lb (68 kg) side load to the handle with the blade fixed for 120 seconds. The side load shall be placed to the tang end of the handle after the blade is securely clamped to a flat surface. The eye and handle shall overhang the surface and one clamp placed adjacent to the eye section. The strap shall be removed for the type II bush hook before the test. The head and handle shall not separate or loosen when subjected to 1800 lbs (816.5 kg) tension load.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:11Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. The blades of the bush hooks shall be free from imperfections including scale, seams, cracks, burrs, nicks, chips, warpage, or distortion of any kind. The wooden handles shall be free of cracks, nicks, and any other splinter-producing imperfections.

3.8 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

3.9 Standard commercial product. The items shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. A standard commercial product is a product which has been sold or is currently offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures and represents the latest production model.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Sources of non-Government association documents.

ASTM standards are available from the American Society for Testing and Materials (ASTM) ," 1916 Race Street, Philadelphia, PA 19103.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:11Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable) .

Title, number, and date of this commercial item description.
b. Type required (see 2.1).
c. The preservation, packing, and marking required.

7.3 Figures. The figures shown herein are descriptive and not restrictive, and not intended to preclude the purchase of items which are otherwise in accordance with the requirements of this commercial item description.

7.4 National Stock Numbers (NSN's). The following is a list of NSN's assigned which correspond to this commercial item description. This list may not be indicative of all possible NSN's.

NSN	Type	Nomenclature
3750-00-056-0023	I	Bush Hook
3750-00-240-3085	11	Bush Hook

MILITARY INTEREST'S:

Custodian
Air Force - 99

Review Activity
Air Force - 84

PREPARING ACTIVITY:
GSA - 7FXEE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:11Z
Check the source to verify that this is the current version before use.