MILITARY SPECIFICATION

CONVEYOR, BELT: POWERED; MEAT-LOAF

1. SCOPE

1.1 This specification covers one type of motor-driven; continuous, cleated-belt conveyor for handling blocks of ground meat.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-634 - Steel, Bar, Carbon, Cold Finished (Standard Quality)
QQ-S-698 - Steel, Sheet and Strip, Low-Carbon
QQ-S-741 - Steel, Carbon: Structural Shapes, Plates and Bars
PPP-B-601 - Box, Wood, Cleated-Plywood

MILITARY

MIL-P-116 - Preservation, Methods of
MIL-V-173 - Varnish, Moisture-and-Fungus-Resistant (For the Treatment of Communications, Electronic, and Associated Electrical Equipment
MIL-M-40163 - Molding Machines, Meat-Fish

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Table for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-461 - Electromagnetic Interference Characteristics Requirements for Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

MIL-STD-46 Electromagnetic Interference Characteristics, Measurement of

MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing with Appropriate Test Methods

(Copies of Military specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN TRUCKING ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P. Street, N.W., Washington, D.C. 20036.)

NATIONAL SANITATION FOUNDATION (NSF)

Standard No. 2 - Food Service Equipment and Appurtenances

Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation P.O. Box 1468, Ann Arbor, Michigan 48106.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Motor Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

UNDERWRITERS LABORATORIES, INC. (UL)

Standard No. 73 - Motor Operated Appliances (1960)

Electrical Appliances and Utilization Equipment List

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the currentversion before use.

(Application for copies should be addressed to the Underwriters' Laboratories Inc., Walt Whitman Road, Melville, L.I., New York 11746; 207 East Ohio Street, Chicago, Illinois 60611; or 1655 Scott Boulevard, Santa Clara, California 95050.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced, a sample belt conveyor covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of the responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product.- The belt conveyor delivered under this specification shall be the manufacturers' standard commercial product, except for any changes necessary to meet specification requirements.

3.3 Standards.- The belt conveyor shall conform to the applicable requirements of NSF Standard No. 2 and UL Standard No. 73.

3.3.1 NSF Certification.- The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the belt conveyor he proposes to furnish under this specification meets the applicable requirement of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal of the finished belt conveyor shall be submitted, prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment or

(2) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the belt conveyor is being procured, indicating that the belt conveyor has been tested and conforms to NSF Standard No. 2, shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

3.3.2 UL certification.- Prior to approval of the preproduction sample, if one is submitted, of prior to approval of the first shipment, the supplier shall submit satisfactory evidence to the contracting officer or his authorized representative, that the belt conveyor he proposed to supply under this specification meets the applicable requirements of UL Standard No. 73. Acceptable evidence of meeting the applicable requirements of UL Standard No. 73 shall be the UL label, a listing in the "Electrical Appliances and Utilization Equipment List", or a certified test report from a recognized independent testing laboratory, acceptable to the Government, indicating that the belt conveyor offered conforms to the applicable requirements of the UL Standard No. 73.

3.4 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for his belt conveyor provided the completed item complies with all provisions of this specification. Unless otherwise specified herein, commercial tolerances shall apply to material thickness.

3.4.1 Steel carbon.-

3.4.1.1 Steel sheet.- Steel sheet shall conform to cold rolled, commercial quality (CRCQ) of QQ-S-698.

3.4.1.2 Steel bars.- Steel bars shall conform to QQ-S-634.

3.4.1.3 Angles and shapes.- Steel angles and shapes shall conform to QQ-S-741.

3.5 Design and construction.- The belt conveyor shall be designed to transfer 3600 molded meat blocks per hour, weighing 1-1/2 pounds from the molding machine (see 6.1) to the wrapping table or to the next operation (see 4.5.2). The belt conveyor shall be inclined, higher at the drive end and lower at the idler end as illustrated in figure I. The belt conveyor shall consist of a conveyor bed, supporting frame, supporting brace, neoprene belt conveyor, legs, electric motor driven mechanisms, roller unit, controls, and cable and plug assembly. The belt conveyor supporting frame shall be of a riveted, bolted,or welded construction. Means shall be provided to allow adjustment of the belt conveyor height.

3.5.1 Conveyor bed assembly.- The conveyor bed assembly shall be constructed of formed steel specified in 3.4.1.3. The conveyor bed assembly shall be provided with an electric motor driven pulley unit mounted at the drive (high) end and an idler, pulley unit, mounted at the idler (low) end. An adjustable tension pulley shall be mounted on the underside of the conveyor bed assembly at the drive end. The drive, idler and tension pulley units, shall be provided with antifriction bearings. The conveyor bed shall be of sufficient width to accomodate the conveyor belt specified in 3.5.4.

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:53Z
Check the source to verify that this is the current version before use.

3.5.2 Supporting frame.- The supporting frame shall consist of steel braces and formed or rolled steel angles. The steel braces shall be fabricated from steel specified in 3.4.1.1 and the formed or rolled steel angles shall be fabricated from steel specified in 3.4.1.3. The frame shall support the conveyor bed assembly and be furnished with four legs. A brace fabricated from steel specified in 3.4.1.2 shall be located at the idler (low) end of the conveyor to support the bottom of the molding machine. The brace shall be 1/2 inch in diameter and 7-1/2 inches long with a tolerance of plus or minus 1/16 inch.

3.5.3 Legs.- Four adjustable steel legs shall be provided and shall be attached to the supporting frame. Two legs shall be located at the drive end, adjustable from 24 to 40 inches high, and two legs shall be located at the idler end, adjustable from 11-1/2 to 15-1/2 inches high.

3.5.4 Conveyor belt.- The conveyor belt shall be of the continuous type fabricated of 3-ply, white neoprene. The conveyor belt shall be provided with cleats spaced 11-1/2 inches on center. The cleats shall be an integral component of the conveyor belt. The conveyor belt shall be 6 inches plus or minus 1/8 inches wide.

3.5.5 Roller unit.- The roller unit shall consist of a minimum of ten rollers with steel shafts assembled in a steel angle frame. The rollers shall be fabricated of aluminum and shall be provided with ball bearings in each end. The rollers, when assembled, shall be free wheeling and shall not bind. The roller unit shall be located at the discharge end of the belt conveyor. The roller unit shall transfer the molded meat-loaf blocks from the conveyor to the next operation. The roller unit shall be a minimum of 8 inches wide and 9-3/4 inches plus or minus 1/8 inch long.

3.6 Electrical characteristics.-

3.6.1 Motor.- Unless otherwise specified (see 6.2), the motor shall operate on a 120-volt, 60-Hertz, 1-phase power source and shall have a minimum rating of 1/30 H.P. The motor shall be capable of driving the belt at a speed of 58 feet per minute.

3.6.2 Control switch.- An ON-OFF switch shall be provided to energize the circuit for the belt conveyor. The control switch shall be accessible to the operator. When the switch is placed in the OFF position all ungrounded lines shall be broken.

3.6.3 Cable and plug assembly.- The conveyor belt assembly shall be electrically grounded by a grounding type cord and a 3-prong grounding type attachment plug cap. The cord shall be a 3-conductor grounding type power supply cord, UL type SJ, SJT or SV. One conductor to be a grounding wire

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the currentversion before use.

and the cord shall be provided with a parallel-blade grounding type attachment plug cap. The grounding conductor of the cord shall be attached to all exposed dead metal parts of the conveyor belt assembly at one end and shall be attached at the other end to the ground blade wiring terminal of the attachment plug cap. The cord shall be a minimum of 6-feet long.

3.6.4 Electromagnetic compatibility.- When specified (see 6.2), belt conveyors shall be designed and equipped for electromagnetic compatibility in accordance with class IIB of MIL-STD-461.

3.7 Fungus and moisture resistance.- When specified (see 6.2), the machine shall be treated to resist fungus and moisture as follows.

3.7.1 Circuit elements with temperature rise not more than 75 F.- Circuit elements, which have a temperature rise of not more than 75 F. when operating at full load, shall be coated with fungus-resistant varnish conforming to MIL-V-173. Circuit elements include, but are not limited to, cable, wire, terminal blocks, capacities, and coils.

3.7.2 Electrical components not requiring fungus moisture resistance.- Electrical components such as switches, fuses and contacts, shall not be treated. Other materials and components which are inherently fungus resistant or are protected by hermetic sealing need not be treated.

3.8 Lubrication.- Means shall be provided for lubricating bearings, shafts and other moving parts requiring lubrication. At the time of delivery, the conveyor assembly shall be completely lubricated with the manufacturer's standard lubricant.

3.9 Repair and maintenance.- Provisions shall be made to allow for ready adjustment, service, and replacement of components without disturbing or disassembly of any major components. In addition there shall be free access to inspect, service, and adjust any component or equipment as provided for by this specification or as indicated by the component or equipment manufacturer, without requiring disassembly of any other component or equipment on the conveyor assembly.

3.10 Operation.- The conveyor assembly shall be operationally and functionally tested as specified in 4.5.1 and 4.5.2, respectively, for the following determinations:

(a) Operation for adjusting devices.
(b) Operation of control switch.
(c) Proper operation of parts.
(d) Binding.
(e) Undue noise or vibration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

3.11 Welding.- All surfaces to be welded shall be free from oxide, scale, and grease. Welds shall be continuous sound and smooth and free from incomplete fusion, porosity, cracks, undercuts, burn-through and deformation of material. All flux deposits (when flux is used) shall be removed from welds.

3.12 Finish.- The conveyor bed assembly, supporting frame, legs, and roller unit shall be smooth on all surfaces and edges; free from discoloration or stains and shall be finished in accordance with the manufacturers standard practice.

3.13 Equipment manuals.- Each conveyor belt, assembly shall be provided with an equipment manual. Manual contents and additional manual distribution shall be as specified in the contract or purchase order (see 6.2).

3.14 Marking for identification.- Each conveyor belt assembly shall be permanently marked with the manufacturer's name, trade name or trademark of such known character as to be readily identifiable with said manufacturer.

3.15 Workmanship.- The conveyor belt assembly shall be free from defects such as fractures, splits, punctures, tears, dents, bows, or malformations. There shall be no sharp edges, burrs, or slivers. Welding shall be accomplished in a manner that will prevent the occurrence of pits or flashes. Riveting shall be accomplished so that when the peening or upsetting operation is performed the driven rivet shall completely fill the hole and the head and upset end shall make full contact with the surface members. When bolts, nuts, or other threaded fasteners are used they shall be drawn up tight.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects in table I, and specified dimensions, and tested as specified in 4.5.1 and 4.5.2 and when applicable, 4.5.3.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection.- An inspection lot shall consist of all belt conveyors offered for inspection at one time. The sample unit shall be one completely fabricated belt conveyor.

4.3.2.1 Visual examination.- The completely assembled end item shall be examined for defects listed in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Discolored or stained.		X
	Surfaces or edges not smooth.	X	
Design, construction and workmanship (general)	Component missing.	X	
	Any sharp edges, burrs or slivers.	X	
	Any fractures, splits, punctures, tears, dents, bows, deterioration or malformation.	X	
Conveyor bed	Pulleys not provided with anti-friction bearings.	X	
	Conveyor bed not of sufficient size to support conveyor belt.	X	
	Frame not as specified.	X	
	Not provided with means for belt adjustment.	X	
	Functioning component inoperative.	X	
	Parts not lubricated (where required).	X	
	Parts insufficiently lubricated (where required).		X
Supporting frame	Does not support components (that is conveyor bed, electric motor, drive mechanisms and legs).	X	
	Molding machine support not provided.	X	
	Molding machine support not adjustable.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Conveyor belt	Not provided with cleats.	X	
	Not 3-ply.	X	
Roller unit	Not provided with minimum of ten rollers.	X	
	Not provided with ball bearings.	X	
	Not located at discharge end of conveyor.	X	
	Rollers not free wheeling.	X	
	Roller(s) bind.	X	
Legs	Not adjustable.	X	
	Leg stand assembly not provided at drive (high) end.	X	
Controls and connections	Not accessible to operator.	X	
	Not three-wire grounding type cord.	X	
	Not three-prong grounding attachment plug.	X	
Welding (when applicable)	Not free from oxide, scale or grease.		X
	Excessive flux not removed.		X
	Not continuous, sound, smooth; or free from pits, flash, porosity, cracks, incomplete fusion, undercut, or deformation of material.	X	
Riveting (when applicable)	Rivet, when upset, does not make full contact with surface members.		X
	Rivet not neatly set or secure that is loose or removable.	X	
Bolts, nuts, screws, studs and other threaded fasteners	Missing, broken, stripped, fractured.		X
	Not drawn up tight.		X
Identification marking	Missing, illegible, incomplete.		X
Manuals	Missing, incomplete, not legible.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

use location of the system detail blocked.

4.3.2.2 Dimensional examination.- Inspection shall be made of the end item for compliance with dimensional requirements. Any deviation from the specified requirements shall be classified a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item.- When a preproduction sample is not required the initial production unit shall be tested as specified in 4.5.2 and when applicable, 4.5.3 with any nonconformance cause for rejection of the lot. Each unit of production shall be tested as specified in 4.5.1 with any nonconformance cause for rejection of the item. In addition, the supplier shall perform the test specified in 4.5.2 using an inspection level of S-2 and an AQL of 2.5 defects, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examination	Defect
Materials	Any component missing or damaged.
Marking	Omitted; incorrect; illegible; or improper size, location, sequence or method of application.

4.3.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-601, examination for defects in closure and strapping shall be in accordance with PPP-B-601. Examination for defects in cushioning, blocking and bracing, and waterproofing shall be in accordance with MIL-STD-1186.

4.4 Standard compliance.- Proof of compliance with the requirements of 3.3 shall be made available to the Government representative.

4.5 Tests.-

4.5.1 Operational test.- The belt conveyor shall be connected to a power source and operated without load for a minimum of 15 minutes to determine compliance with 3.10. Inability of the belt conveyor to meet the operational requirements in 3.10 shall constitute failure of the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

4.5.2 Functional test.- The belc conveyor shall be connected to a power source and operated for 10 minutes with meat-loaf blocks produced by the molding machine to determine compliance with 3.5, the belt speed requirements of 3.6.1, and the operational requirements of 3.10. Inability of the belt conveyor to meet the functional requirements specified shall constitute failure of the test.

4.5.3 Electromagnetic compatibility test.- When electromagnetic compatibility is required, the preproduction sample or initial unit of production shall be equipped for the reduction of radio interference in accordance with 3.6.4 and shall be tested by the supplier in accordance with test methods CE03 and RE02 of MIL-STD-462. The Government reserves the right to witness tests performed by the supplier or his private testing organization. The supplier shall furnish the contracting officer for approval, the Interference Control Plan, the EMI/EMC Test Plan and the Electromagnetic Compatibility Test Report required in MIL-STD-461. Upon approval of the report by the contracting officer and provided all other requirements of the specification are met, the preproduction sample or initial unit of production, as applicable, shall be used as a model for all production.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each conveyor shall be disassembled to the extent determined by the manufacturer. This determination shall be based on the need for protection of parts susceptible to damage during transit or storage and for the reduction of cubage. Attaching hardware shall be replaced on one of the mating parts or placed in a cloth drawstring bag and the bag attached to one of the mating parts. Disassembly shall not be such that special skills or special tools, or both, are required to place the equipment in operation. Parts of the conveyor that are free to move shall be secured in a fixed position to prevent movement or vibration during transit. The equipment manual shall be packaged in accordance with method IC-1 of MIL-P-116.

5.1.2 Level C.- The conveyors shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Each conveyor packaged as specified in 5.1, shall be packed in a cleated-plywood shipping container conforming to overseas type, style A or B, type 3 load of PPP-B-601. Cushioning, blocking and bracing, and waterproofing shall be in accordance with MIL-STD-1186. Each shipping container shall be closed and strapped in accordance with the appendix of PPP-B-601.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the currentversion before use.

5.2.2 Level B.- Each conveyor, packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that the shipping container shall be domestic type, style A or B, type 3 load of PPP-B-601 and waterproofing shall not be required.

5.2.3 Level C.- Conveyors, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification rules or National Motor Freight rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The conveyor belt assembly covered by this specification is intended for use in conjunction with the type III, class 2 molding machine of MIL-M-40163 in food handling establishments to transfer molded meat-loaf blocks from the molding machine to a wrapping level.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article.- When preproduction sample is waived (see 3.1).
(c) Electrical characteristics, if other than specified (see 3.6.1).
(d) When electromagnetic compatibility is required (see 3.6.4).
(e) When fungus and moisture treatment of electrical components is required (see 3.7).
(f) Manual contents and distribution of additional manuals (see 3.13).
(g) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Electromagnetic compatibility.- When required, the contracting officer should submit a copy of the Interference Control Plan, the EMI/EMC Test Plan, and the Test Report required in 4.5.3 to the Commanding General, U. S. Army Electronics Command, ATTN: AMSEL-RD-GF, Fort Monmouth, New Jersey 07703, for approval.

Custodian:

Army - GL

Review activities:

Army - EL, MD

Preparing activity:

Army - GL

Project No. 7320-A356

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the currentversion before use.

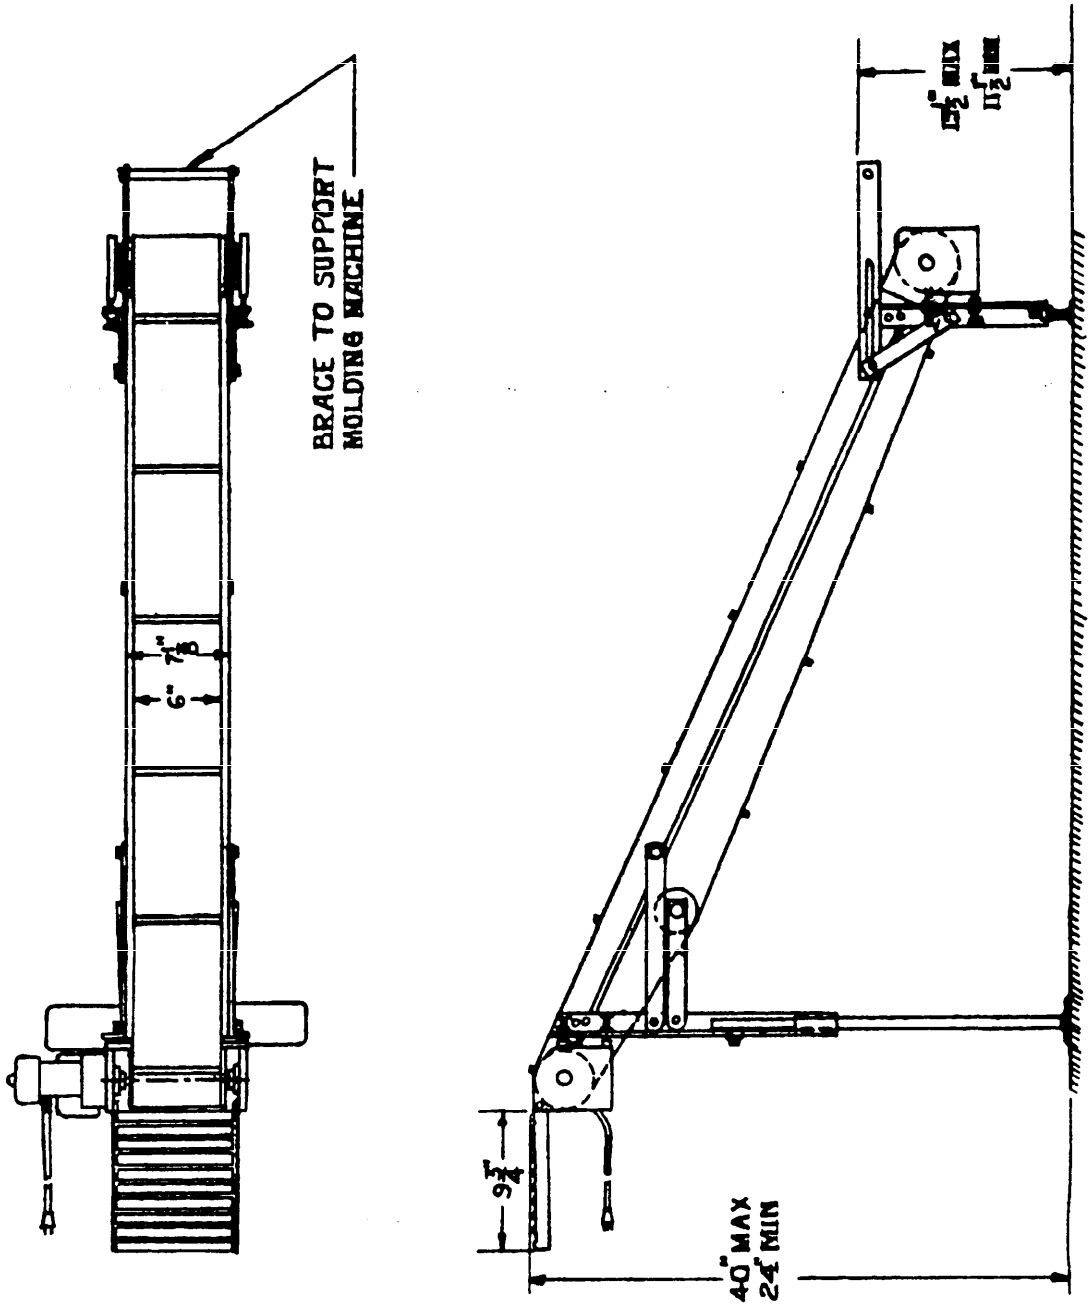


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Conveyor, Belt: Powered; Meat-Loaf MIL-C-43631(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the current version before use.