MIL-H-43595B
7 August 1984
SUPERSEDING
MIL-H-43595A(GL)
29 September 1972

MILITARY SPECIFICATION

HAMMOCK, JUNGLE, NYLON, M-1966

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type and size of jungle hammock.

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-398	-	Plastic Molding Material, Styrene-Butadiene
V-T-285	-	Thread, Polyester
A-A-203	-	Paper, Kraft, Untreated
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

b. Issue of DODISS to be cited in the solicitation, and if required, the

MILITARY

MIL-R-3065 - Rubber, Fabricated Products
MIL-W-17337 - Webbing, Textile, Woven, Nylon
MIL-C-43128 - Cloth, Plain Weave, Nylon: Water Repellent, OG-106
MIL-C-43256 - Cord, Polyester, Solid Braid
MIL-C-43678 - Cord, Fibrous, Polyester, Diamond Braid
MIL-C-43701 - Cord, Elastic, Nylon

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-417 - Classification System and Test for Solid Elastomeric Materials (Inactive for New Design)

DRAWINGS

U.S. ARMY NATICK RESEARCH AND DEVELOPMENT CENTER

2-1-909 - Hammock, Jungle, Nylon, M-1966; Assembly Complete
4-1-447 - Slip, Poncho Suspension, Jungle Hammock

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:47Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples of the end item, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this document may appear in the sample, in which case this document shall govern.

3.2 First article. When specified, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Materials (see 6.5).

3.3.1 Cloth, nylon. The material for the hammock shall be nylon cloth, Olive Green 106, water repellent conforming to MIL-C-43128.

3.3.2 Webbing, nylon. The nylon webbing shall be one inch wide conforming to MIL-W-17337 except the colorfastness requirement for crocking shall not apply. The color shall be Olive Drab 7 to match the standard sample (see 6.3).

3.3.3 Thread, polyester. The thread for all stitching shall be type I, class 1, size E, sub-class A conforming to V-T-285.

3.3.3.1 Color and colorfastness. The thread shall be dyed Olive Drab S-1, C.A. 66022 and shall show good fastness to weathering.

3.3.4 Cord, polyester. The cord for the tie lines and toggle connector lines shall be 3/32 inch diameter, Olive Drab 7, conforming to MIL-C-43256. The cord for the suspension lines shall be 3/16 inch diameter, Olive Drab 7, conforming to MIL-C-43678.

3.3.5 Rubber. The rubber material for the rain stop disc shall be in accordance with MIL-R-3065 and conform to type S, class SC, grade 615, 3/32 inch thick of MIL-STD-417.

3.3.6 Toggle, plastic. The plastic toggle shall be fabricated from polystyrene rod stock. The plastic material used in the rod stock shall meet the requirements of either type II or III, class 2 of L-P-398. The material shall be black in color.

3.3.7 Cord, elastic, nylon. The nylon elastic cord shall be 7/32 inch diameter, Olive Drab 7, conforming to type I of MIL-C-43701.

3.3.8 Slip, poncho suspension. The poncho suspension slip shall conform to Drawing 4-1-447 (see 4.4.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

3.4 Construction. The construction shall conform in all respects to Drawing 2-1-909 and as specified herein.

3.4.1 Stitching, machine. All stitching, except bartacking, shall conform to FED-STD-751. The stitch type for all stitching, except where indicated on drawing as zig zag stitching, shall be 301 with 8 to 10 stitches per inch. For zig zag stitching the stitch type shall be 304 with 12 to 16 stitches per inch. Stitches per inch for type 304 stitching shall be determined by counting points along one side only.

3.4.1.1 Type 301 stitching. Ends of all stitching, except W-W, shall be backstitched or overstitched 1 inch minimum except where ends are turned under in a hem or held down by other stitching. On W-W stitching, all ends shall be backstitched or overstitched 1/2 inch minimum. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.4.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1 inch (1/2 inch box W-W stitching back of the end of the stitching. 1/

b. Thead breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area (1/2 inch for W-W stitching), continue over the defective area and continue a minimum of 1 inch (1/2 inch for W-W stitching) beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.4.1.2 Type 304 stitching. Ends of type 304 stitching shall be secured by bunching (forming a tack) the first, and last, three to five stitches on top of each other or directly adjacent to each other, i.e., no spacing. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.4.1.2.1 Repairs of type 304 stitching. All repairs shall be as specified for type 301 stitching in accordance with 3.4.1.1.1a and 3.4.1.1.1b except substitute "three stitches" for "1 inch" wherever "1 inch" appears.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

3.4.1.3 Bartacking. Unless otherwise specified, bartacks shall be 3/4 ± 1/8 inch long, 1/8 ± 1/32 inch wide and shall contain 42 stitches. Bartacking shall be free from thread breaks and loose stitching.

3.4.1.4 Stitch margins. Unless otherwise specified, all stitching margins shall be 1/8 ± 1/16 inch.

3.4.1.5 Automatic stitching. Automatic stitching machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of the stitching.

3.4.1.6 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

3.4.2 Fusing of ends of polyester cord and nylon webbing. Unless otherwise specified, all ends of polyester cord and nylon webbing shall be fused. The apparatus used to fuse the webbing and cord ends shall be capable of providing sufficient heat to provide smooth ends with the cut ends of the webbing and cord yarns all fused together.

3.4.3 Cutting elastic cord. The elastic cord specified in 3.3.7 shall be cut with a heated knife or wire or otherwise fused after cutting to prevent the braided nylon sleeve from fraying.

3.4.4 Repairs. Except as otherwise specified herein, repairs are not allowed to be made to the hammock.

3.5 Marking. The identification marking shall be applied in the location shown on Drawing 2-1-909 and shall conform to type IV, class 5 of DDD-L-20. The letters "US" shall be applied in the location and in the size characters indicated on Drawing 2-1-909 and shall conform to type IV, class 9 of DDD-L-20. Fastness of the class 9 marking shall be as specified for class 5 marking.

3.6 Instruction tag. Each hammock shall be furnished with an instruction tag. The instruction tag shall be printed on tag stock and the printing shall be with a water insoluble ink (see 4.4.1.1). The tag shall approximate 7-1/2 by 5-5/8 inches folded in the middle to form four printed pages in book form 3-3/4 by 5-5/8 inches. Approximate dimensions are furnished as a guide only. On page 1, the illustration shown on figure 1 shall be printed. On page 2, the instructions shown on figure 2 shall be printed. On page 3, the illustration shown on figure 3 shall be printed. On page 4, the illustration shown on figure 4 shall be printed. A hole shall be punched in the top near the folded edge for a tying cord. The size of the illustrations and characters on the figures shall be the same scale as shown.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T21:47Z
Check the source to verify that this is the currentversion before use.

3.6.1 Cord, tie. A tie cord shall be furnished no finer than 5-ply cotton cord, (see 4.4.1.1) doubled to not less than 8 inches long. The tie cord shall be attached to the instruction tag by passing the loop end through the punched hole and then by passing the free ends through the loop. The instruction tag shall be tied with a square knot to one of the hammock spreader bar tabs.

3.7 Workmanship. The finished hammock, with assembled components as required, shall conform to the quality established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4 and tested for the characteristics specified in 4.4.5. The presence of any defect or failure to pass any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Certification. The contractor shall furnish a certificate of compliance for the components and materials listed below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

Component and material	Requirement reference
Slip, poncho suspension	3.3.8
Instruction tag and tie cord	3.6 and 3.6.1
Water insoluble ink	3.6

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether construction details which cannot be examined in the finished product are in accordance with specified requirements. This inspection shall include verification of the cut lengths for the suspension lines, tie lines, toggle connector lines and poncho suspension loops are as specified. Whenever nonconformance is noted, corrections shall be made to the items affected and lot in-process. Items which cannot be corrected shall be removed from production.

4.4.3 End item visual examination. The end item shall be examined for the defects listed in table I. The lot size shall be expressed in units of hammocks. The sample unit shall be one hammock. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 10.0 for total (major and minor combined) defects.

TABLE I. End item visual defects

Examine	Defect	Classification Major	Minor
Cloth	Any hole, cut, or tear	X	
	Any abrasion marks, broken or missing yarns, or multiple floats clearly visible at normal inspection distance (approximately 3 feet)	X	
	Any mend, darn, or patch	X	
	Needle chews:		
	- up to 1/8 inch in length		X
	- more than 1/8 inch in length	X	
Webbing	Any hole, cut, or tear	X	
	Frayed or scalloped edges, not firmly or tightly woven	X	
	Needle chews:		
	- up to 1/8 inch in length		X
	- more than 1/8 inch in length	X	
	Ends not fused or not fused properly, i.e., yarn ends not fused together or not smooth		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

Weight exceeds maximum load limits

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Cord, polyester and elastic	Cut, chafed, or abraded	X	
	Polyester cord ends not fused or not fused properly, i.e., yarn ends not fused together or not smooth		X
	Cut ends of sleeve on elastic cord not fused		X
Slip, poncho suspension	Broken or malformed, failing to serve intended purpose, any eyelet omitted or not clinched as specified, finish omitted, burr, or sharp edge	X	
	Finish contains sags, runs, wrinkles, or blisters		X
Toggle	Burr or sharp edge		X
	Color not as specified		X
Open seams	1/2 inch or less		X
	More than 1/2 inch	X	
NOTE:	A seam shall be classified as an open seam when one or more stitches joining a seam are broken, skipped or runoff stitches occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.		
Raw edges (except where required)	More than 1/2 inch when securely caught in stitching		X
NOTE:	Raw edges not securely caught in stitching shall be classified as open seams.		
Seam and stitch type	Wrong seam or stitch type	X	
	Seams pleated or badly puckered		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Stitch tension (types 301 and 304)	Tension loose, resulting in loose bobbin or top thread		X
	Tension tight, resulting in puckering of material		X
Stitches per inch (types 301 and 304 stitching)	One or two stitches less than minimum specified		X
	Three or more stitches less than minimum specified	X	
	One or more stitches in excess of maximum specified		X
	NOTE: (1) Variation in the number of stitches per inch caused by operator speeding up the machine and pulling the material in order to sew over heavy places, or in turning corners shall be classified as follows: (a) Within the minor defect classification - No defect. (b) Within the major defect classification - Minor defect.		
	NOTE: (2) Except for type 304 stitching and stitching on 1 inch nylon webbing, defects are to be scored only when condition exists on any one seam for a length of 3 inches or more or when the combined length of several areas exceeds 6 inches. For type 304 stitching and stitching on 1 inch nylon webbing, defects shall be scored when condition exists on major portion of the seam or stitch pattern.		
Thread breaks, skipped stitches, or runoffs (on type 301 stitching)	On stitching other than W-W stitching, overstitched less than 1 inch in each direction beyond defective stitching area		X
	On W-W stitching, overstitched less than 1/2 inch in each direction beyond the defective stitching area		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:47Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Thread breaks, skipped stitches, or runoffs (on type 304 stitching)	Overstitched less than three stitches in each direction beyond the defective stitching area		X
NOTE:	On all types of stitching, thread breaks or two or more consecutive skipped or runoff stitches not overstitched shall be classified as open seams.		
Stitching ends (on types 301 and 304 stitching)	Ends of stitching not secured as specified (except when caught in other stitching or turned under in a hem)		X
W-W stitching	One row of stitching missing		X
	Two or more rows of stitching missing	X	
Bartacks	Stitching loose, incomplete, or broken		X
	Number of stitches not as specified		X
Cleanness	Grease, ink, or oil stains clearly noticeable		X
	Thread ends not trimmed throughout as specified		X
Components and assembly	Any component or required operation omitted (unless otherwise classified herein)	X	
Suspension lines	Loop at end not formed with a bowline knot		X
Toggle connector lines	Not attached to poncho suspension loops as specified, i.e., looped around elastic cord once in lieu of twice		X
Tie lines	Any omitted	X	
	Not secured to spreader bar tabs with a square knot		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Identification markings	Omitted, incorrect, illegible. misplaced, or size of characters not as specified		X
Instruction tag	Omitted or illegible		X
	Not attached to hammock		X

4.4.4 End item dimensional examination. The end item shall be examined for defects listed in table II. The lot size shall be expressed in units of hammocks. The sample unit shall be one hammock. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5 for major defects and 10.0 for total (major and minor combined) defects.

TABLE II. End item dimensional defects

Examine	Defect	Classification Major	Classification Minor
Dimensions, overall	Smaller than nominal dimensions, less applicable minus tolerance indicated on drawings, but not smaller than nominal dimensions less twice the applicable minus tolerances		X
	Smaller than nominal dimensions, less twice the applicable minus tolerance	X	
	Larger than nominal dimensions and applicable plus tolerance		X
All dimensions other than overall including stitch margin or gage	Not within the specified tolerances		X
	NOTE: Stitch margin or gage defects shall be scored only when condition exists on major portion of the seam.		

4.4.5 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully packaged except that it need not be closed. Examination of closure defects listed below shall be made on shipping containers

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

fully packaged. The lot size shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE III. Packaging defects

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, improper taping, inaedquate stapling, or distortion of container.
Content	Number of units packs (bundles) per container is more or less than specified. Number of hammocks per unit pack (bundle) is more or less than specified. 1/

1/ For this defect, one bundle from each shipping container in the sample shall be examined.

4.4.6 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with table IV. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

TABLE IV. Palletization defects

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exzceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:47Z
Check the source to verify that this is the currentversion before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each hammock shall be laid out flat with the suspension lines relaxed in their respective tunnels and with the bowline knotted-ends at the sides. The hammock shall be folded in half lengthwise with the side hems superimposed, thereby reducing the width to approximately 17 inches. The length shall be folded in half so that all the corded tunnel ends are superimposed. The loose suspension line ends at the corner shall be neatly flat-coiled along the tunnel extremity. Using the tunnel with coiled suspension line ends and the evenly distributed attached poncho suspension loops thereon as a core, a flat-roll shall be continued to the other folded end. The flat-rolled hammock shall have approximate dimensions of 17-/12 by 4-1/2 by 1-1/2 inches. Five folded hammocks shall be neatly stacked to form a balanced bundle measuring approximately 17-1/2 by 4-1/2 by 7-1/2 inches. The bundle shall be tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial. The hammocks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. Fifty hammocks, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, five in length, one in width and two in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 18 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.2 Level B packing. Fifty hammocks, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) of SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, five in length, one in width and two in depth within a shipping container. Inside dimensions of each container shall approximate 23 inches in length, 18 inches in width, and 15 inches in depth. Approximatge dimensions are furnished as a guide only. Each fiberboard container shall have

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Hammocks, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), hammocks, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and sescondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable. Each unit pack shall have attached a manila colored paper shipping tag for the identification information.

6. NOTES

6.1 Intended use. The hammock is for use as a sleeping item in jungle areas. Suspension loops with toggles are for attachment of a poncho.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. When a first article sample is required (see 3.2, 4.3, and 6.4).
c. Selection of the applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade shipping containers are required for level B packing (see 5.2.2.1).
e. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting office issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article is required it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The first article should consist of one completed hammock. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.3).

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 99

Review activities:

Army - MD
Air Force - 82

Preparing activity:

Army - GL

Project No. 8465-0689

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

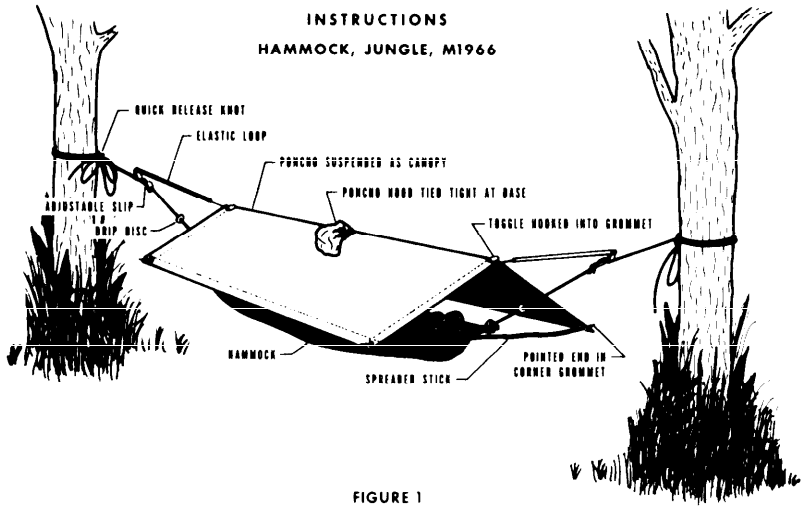


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

1. CARRYING
   a. Fold hammock with accordion-like folds with one hammock rope tucked in a fold and other rope wrapped around folded hammock.

2. SUSPENDING
   a. Clear space between two trees at least 10' apart.
   b. Clear all sharp objects and projections from beneath hammock.
   c. Suspend hammock between trees tying off with quick release knot. (See back of card)

3. ATTACHMENT OF PONCHO
   (For rain protection suspend poncho over hammock as shown in illustration)
   a. Put toggle attached to elastic loop on suspension rope at one end of hammock through center grommet in one end of poncho. Repeat at opposite end of hammock and poncho.
   b. Adjust elastic loop slips on suspension ropes so that ridge line of poncho is nearly a straight line when hammock is suspended.
   c. Cut two spreader sticks not over 5' long and sharpen the ends. Put a stick between the corner grommets at each end of the poncho with the points through the grommets. Sticks should be beneath hammock suspension ropes.
   d. Position rubber drip disc just above suspension rope knot at each end of hammock.
   e. The poncho can be kept attached to the hammock or removed as desired.

4. END SPREADER(S) (when desired)
   a. Cut spreader stick about 28" long and 1 1/4" in diameter.
   b. Position elastic loop slip and rubber drip disc approximately one foot from end of rope.
   c. Pull free end of hammock rope out of small loop at other end of rope. Keep rope in tunnel hem and adjust so that two protruding ends are equal.
   d. Pass stick through tunnel hem.
   e. Tie rope to each end of stick with clove hitch (2 reversed half-hitches).
   f. Tie cords attached to nylon loops around stick outside of rope knots.
   g. Tie ends of rope together with square knot two feet up from stick ends.
   h. Tie ends of rope around tree.
   i. End spreader is normally used at head end only but can be used at foot end also if desired.

5. KEEP HAMMOCK CLEAN
   (Rinse often. Wash in detergent or soap and warm water.)

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:47Z
Check the source to verify that this is the current version before use.


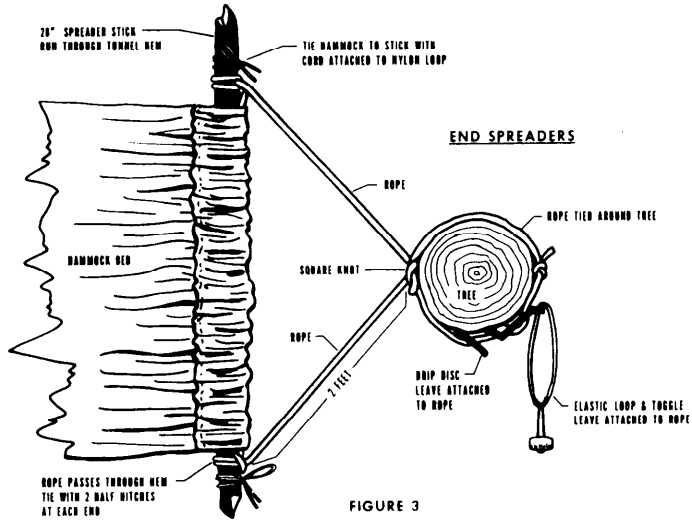


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

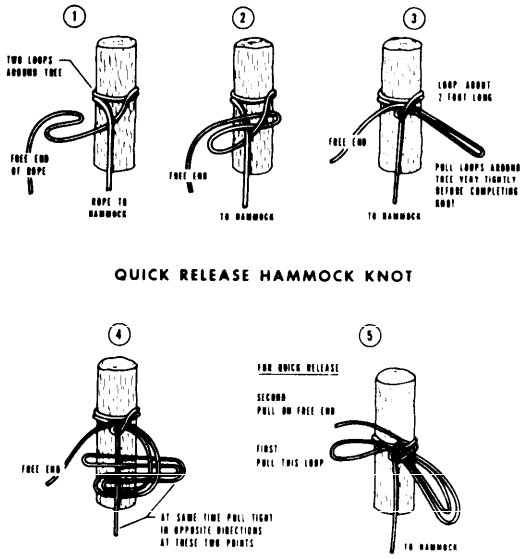

QUICK RELEASE HAMMOCK KNOT

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

3.3 Construction. The construction shall conform to

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Center
Natick, Massachusetts 01760-5014

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

shown on drawing 7-7-211 and shall conform to Type IV, Class 2 of

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL–H–43595B	Hammock, Jungle, Nylon, M–1966

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.