MIL-S-43602B
6 February 1978
SUPERSEDING
MIL-S-43602A
6 December 1971

# MILITARY SPECIFICATION

## SKIRTS, WOMEN'S, SUMMER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the requirements for polyester-cotton, corded cloth skirts.

1.2 Classification. The skirts shall be one type in the following classes and sizes as specified (see 6.2).

Class 1 - Green (Army, MC)
Class 2 - Blue (AF)

Schedule of sizes

Misses Sizes

| | | |
|---|---|---|
| Extra short | - | 8, 10, 12, 14, 16 |
| Short | - | 8, 10, 12, 14, 16, 18, 20 |
| Short plus | - | 10, 12, 14, 16 |
| Regular | - | 8, 10, 12, 14, 16, 18, 20 |
| Regular plus | - | 10, 12, 14, 16 |
| Long | - | 8, 10, 12, 14, 16, 18, 20 |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

Junior Sizes

7, 9, 11, 13, 15

Matronly Sizes

Short - 38, 40, 42, 44
Regular - 38, 40, 42, 44
Long - 38, 40, 42, 44

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871 - Button, Sewing Hole, and Button, Staple, (Plastic).
V-F-106 - Fasteners, Slide, Interlocking.
V-T-280 - Thread, Gimp, Cotton, Buttonhole.
DDD-L-20 - Label: For Clothing, Equipage, and Tentage (General Use).
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

MILITARY

MIL-B-371 - Braid, Textile, Tubular.
MIL-C-40052 - Cloth, Corded, Polyester-Cotton Warp and Polyester Filling.
MIL-T-43548 - Thread, Polyester, Cotton-Covered.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1609 - Provisions for Evaluating Quality for Women's Skirts.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 Materials.

3.2.1 Basic material. The basic material shall be polyester-cotton corded cloth, Army Green 160 for class 1 skirt and Blue 3304 for class 2 skirt, conforming to type I or type II of MIL-C-40052.

* 3.2.2 Hanger loop braid. The hanger loop braid shall conform to type IX or X, class 1 of MIL-B-371.

* 3.2.3 Labels. Each skirt shall have a size label and a combination identification-instruction label conforming to the requirements of type I of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

3.2.3.1 Size label. The size label shall conform to class 2.

* 3.2.3.2 Combination identification-instruction label. The identification label (class 1) and the instruction label (class 3) shall be combined. The coating requirements of the class 3 label shall apply. The item description shall be "Skirt, Women's, Polyester-Cotton, Corded, Army Green 160" for the class 1 skirt; and "Skirt, Women's, Corded, Blue Shade No. 3304" for the class 2 skirt. The following information shall be included directly below the identification information:

LAUNDERING INSTRUCTIONS

Wash in warm water using mild soap or detergent.
DO NOT BLEACH.
Rinse thoroughly.
Do not squeeze or wring.
Drip-dry on non-metallic hanger.
Press on wrong side with iron at low heat.

* 3.2.4 Thread. The thread shall be a cotton-covered polyester conforming to MIL-T-43548, ticket Nos. 50-2 or 3 ply and 70-2 ply. The color of the thread shall be White AH, CA 66050.

3.2.5 Gimp. The gimp for reinforcing the buttonholes shall be White AH, CA 66050 cotton, type I or II, size 8 conforming to V-T-280.

* 3.2.6 Button. The button shall conform to type II, class D, style 20 or 21, size 24-line of V-B-871. The color of the button shall be White BA, Cable 62031.

3.2.7 Slide fastener. The slide fastener shall be type I, style 3, short tab pull, size LS, brass, or zinc chain (except for class 2 skirt), 7 inches (178 mm) in length, conforming to V-F-106 except that the salt spray test shall not apply. The color of the tape shall be white.

3.3 Design. The skirt has six panels with a slide fastener closure at left side, a one button sewn-on waistband with extensions for alterations, and is unhemmed (see figure 1).

3.4 Figures. Figures are furnished for information purposes only. In case of any inconsistencies between the written specification and the figures, the written specification shall control.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a 3/4 inch (19 mm) seam allowance for front and back panel seams, 1 inch (25 mm) for side seams, 1/4 inch (6 mm) for bottom edge turn-up, and 3/8 inch (10 mm) for all other seams.

* 3.5.1 List of pattern parts. The pattern parts and applicable material for cutting the skirt parts shall be as specified in table I.

TABLE I. Pattern parts

| Material | Pattern nomenclature | Cut parts |
|---|---|---|
| Basic material | Center front | 1 |
| | Side front | 2 |
| | Center back | 1 |
| | Side back | 2 |
| | Waistband | 1 |
| | Placket | 1 |

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitches, seams, and stitching types, specified in table II, shall conform to FED-STD-751. When two or more seam or stitching types are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams shall result.

3.6.1.1 Stitches per inch (stitches/cm). The minimum and maximum number of stitches per inch (stitches/cm) shall be as specified in table II.

3.6.1.2 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch (6 mm). The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch (13 mm). Thread breaks shall be secured by stitching back of the break not less than 1/2 inch (13 mm).

* 3.6.1.3 Overedge stitching. The gage of the overedge stitching shall be 3/16 to 1/4 inch (5 to 6 mm). The guide and knives for the overedge machine shall be set to trim only the ravelled edges of the fabric.

3.7 Manufacturing operations requirements. The skirt shall be manufactured in accordance with operation requirements specified in table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

The contractor is not required to follow the exact sequence of operations listed. Any basting or holding stitching to facilitate manufacture is permissible provided the thread does not show on the finished garment.

3.7.1 Shade and size marking. The cut parts of the skirt shall be marked or bundled to insure a uniform shade and size throughout the skirt. Any method of marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on tickets.
(c) Adhesive type tickets which discolor the material or leave traces or paper or adhesive on the material after removal of the tickets.

3.7.2 Pressing. All pressing as required in table II shall be performed with a heated pressing iron or machine set at a suitable temperature for synthetics.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH 1/ | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 1. | Cutting.<br><br>a. Cut the skirts in strict accordance with patterns furnished, which show directional lines, size, and notches for proper assembly of parts. Directional lines shall be placed in the warp direction of the material.<br><br>b. Cut all parts of the skirt out of the same piece of material, except the placket which may be cut from ends. The placket piece shall approximate the shade of the skirt.<br><br>c. Cut the braid for hanger loops (two each) of sufficient length to measure 1-1/2 ± 1/4 inches (38 ± 6 mm) long (folded) in the finished skirt (see operation 6). | | | | | | |
| 2. | Replacement of damaged parts.<br><br>Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as specified in MIL-STD-1609, are excluded and replaced with non-defective and properly matched material. | | | | | | |
| 3. | Shade and size marking.<br><br>Mark, ticket, or bundle all cut parts of the skirt except those cut from ends, to insure a uniform shade and proper assembly of the skirt. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

TABLE II
MANUFACTURING OPERATIONS REQUIREMENTS

| NO. | | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH 1/ | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 4. | Make fronts and backs and join sides. | | | | | | |
| | a. Overedge the raw edges of the panel seams. | 502 or 503 | EFd-1 | 8-10 | 70 | 70 | |
| | b. Starting at waistline, and with notches matched, stitch side fronts to center front, and side backs to center back. The ends of the seams shall start and finish evenly. | 301 | SSa-1 | 10-14 | 70 | 70 | |
| | c. Starting at top, stitch fronts to backs leaving opening for placket on left side as indicated by marks on pattern. The ends of the seams shall finish evenly. | 301 | SSa-1 | 10-14 | 70 | 70 | |
| | d. Press all seams open. | | | | | | |
| 5. | Make skirt closure. | | | | | | |
| | Finished appearance. The placket shall be smooth and flat. The stops at top of fastener shall be not more than 1/2 inch (13 mm) below waistband on the finished skirt. The welt on front skirt shall completely cover the slide fastener when slide fastener is closed and the front skirt shall overlap the back skirt slightly at the bottom of placket (without an outside pleat). The stitching shall not interfere with the operation of the slider and the welt shall be uniform in width. | | | | | | |
| | a. Fold the placket piece in half lengthwise and overedge the side and bottom raw edges. | 503 or 504 | SSa-1 | 8-10 | 70 | 70 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

TABLE II

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH 1/ | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 5. | Make skirt closure. (cont'd) | | | | | | |
| | b. Place slide fastener on placket piece with the center of the closed chain 7/8 to 1 inch (22 to 25 mm) from folded edge and stitch together 1/8 inch (3 mm) from edge of chain along the side nearest to the overedged side. | 301 | SSa-1 | 10-14 | 70 | 70 | |
| | c. Place placket piece (chain side down) on back of skirt with the chain in line with the side seamline and stitch to opening, following the curve of the hip. Do not stretch fabric. | 301 | LSr-2(a) or LSs-2(a) | 10-14 | 70 | 70 | |
| | d. Turn placket piece to its finished position and stitch 1/16 inch (2 mm) from folded edge of skirt through fastener tape and placket piece. | 301 | LSr-2(b) or LSs-2(b) | 10-14 | 70 | 70 | |
| | e. Fold front opening in line with side seamline and stitch to fastener tape, forming a welt 5/8 ± 1/16 inch (16 ± 2 mm) wide. Stitch across bottom of welt to the side seam catching the placket piece and ends of fastener tapes in the stitching. The welt stitching shall be 1/4 ± 1/16 inch (6 ± 2 mm) from the chain and the welt shall cover the slide fastener and the stitching along back edge when fastener is closed. Do not stretch fabric. | 301 | - | 10-14 | 70 | 70 | |
| | NOTE: Prior to operation e., the left side of the fastener tape may be stitched to the front opening, following the curve of the hip. | | | | | | |





NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

TABLE II

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH 1/ | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 6. | Attach waistband, labels, and hanger loops. | | | | | | |
| | Finished appearance. The waistband shall finish 1-1/4 ± 1/8 inches (32 ± 3 mm) wide and shall be uniform in width. The pointed end shall be on the front. Back extension shall finish 2 ± 1/8 inches (51 ± 3 mm) beyond the slide fastener seam and the front extension shall finish 2 ± 1/8 inches (51 ± 3 mm) from the edge of welt to the end of point. The stitching of the waistband-to-skirt joining-seam shall not be exposed on the outside of the finished skirt. The hanger loops shall be positioned over the right side seam and directly back of placket. The labels shall be positioned side by side on center of back with the size label on the left side (when skirt is worn). The stitching shall not be through the label printing. | | | | | | |
| | a. Stitch waistband to inside top of skirt catching hanger loops and labels in the stitching and matching notches. Panel seams shall be spread open. The waistband pattern provides for an extension on the front and back. | 301 | BSg-2(a) | 10-14 | 70 | 70 | |
| | b. Fold the waistband in half lengthwise; seam the straight end and the pointed end. Trim, turn to outside, and work out corners and point. | 301 | SSe-2(a) | 10-14 | 70 | 70 | |
| | c. As an alternate method, the pointed and straight end of waistband may be seamed, trimmed, and turned, prior to setting waistband to skirt. | 301 | SSe-2(a) | 10-14 | 70 | 70 | |



NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER 1/ INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 6. | Attach waistband, labels, and hanger loops. (cont'd) | | | | | | |
| | d. Turn under free edge of waistband and edge stitch to skirt on outside; continue edge stitching around ends and along top of waistband. The edge stitching shall be 1/16 inch (2 mm) gage. | 301 | BSg-2(b) or BSj-2(b) and | 10-14 | 70 | 70 | |
| | | 301 | SSe-2(b) and | 10-14 | 70 | 70 | |
| | | 301 | OSf-1 | 10-14 | 70 | 70 | |
| 7. | Stitch bottom of skirt. | | | | | | |
| | Turn under bottom raw edge of skirt 1/4 inch (6 mm) with panel seams spread open and stitch 1/16 to 1/8 inch (2 to 3 mm) from folded edge. | 301 | EFa-1 | 10-14 | 70 | 70 | |
| 8. | Make buttonhole. | | | | | | |
| | Finished appearance. The buttonhole shall be cut first or cut after, eyelet end taper bar or square bar type. The inside edge of eyelet shall be 1/2 to 3/4 inch (13 to 19 mm) from pointed end. The buttonhole shall be centered (1/4 inch (6 mm) off center tolerance) on waistband. On the finished waistband the purling shall be on the outside. | | | | | | |
| | a. Make an eyelet end taper bar 5/8 to 3/4 inch (16 to 19 mm) finished cut length buttonhole, worked over gimp, on the pointed end of waistband. The bar shall have a minimum of four tacks, not including the cross-over stitch. | Buttonhole | | 44-50 not including tack | 50 | 70 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

TABLE II

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH 1/ | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 8. | Make buttonhole. (cont'd) | | | | | | |
| | b. When a square-bar type of buttonhole is used, it shall be bartacked in a separate operation. | Bartack | | 21 per tack | 70 | 70 | |
| 9. | Attach button. | | | | | | |
| | a. Mark or gage position for the button on the waistband to correspond with eyelet end of button-hole. | | | | | | |
| | b. Sew the button on the mark. When the button is sewn by hand, the sewing shall be tacked off with two stitches and the ends of the threads shall be hidden. | 101 or 301 or Hand | | 14-16 button<br>14-16 button<br>8 per button double thread | 50<br>50<br>50 | 50 | |
| 10. | Clean skirt. | | | | | | |
| | Trim thread ends and remove all loose threads, spots, stains, and shade tickets. | | | | | | |
| 11. | Press skirt. | | | | | | |
| | Press the entire skirt removing gloss marks, wrinkles, thread impressions, and seam impressions (see 3.7.2). | | | | | | |

1/ Metric equivalents for stitches per inch are as follows:

| Stitches per inch | Stitches/cm |
|---|---|
| 8-10 | 3-4 |
| 10-14 | 4-5-1/2 |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The unhemmed skirt shall conform to the finished measurements in table III. The tolerance for waist measurement shall be ± 1/4 inch (± 6 mm). For all other measurements, the tolerance shall be ± 1/2 inch (± 13 mm).

TABLE III. Finished measurements in inches (mm)

| | MISSES SIZES | | | | | | |
|---|---|---|---|---|---|---|---|
| Sizes | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
| 1/2 waist | 11-3/4 (298) | 12-1/4 (311) | 13 (330) | 13-3/4 (349) | 14-1/2 (368) | 15-1/2 (394) | 16-1/2 (419) |
| 1/2 waist (plus sizes) | - | 12-3/4 (324) | 13-1/2 (343) | 14-1/4 (362) | 15 (381) | 16 (406) | - |
| 1/2 hip | 18-1/2 (470) | 19-1/4 (489) | 20 (508) | 20-3/4 (527) | 21-1/2 (546) | 22-1/4 (565) | 23-1/4 (591) |
| 1/2 hip (plus sizes) | - | 20-1/4 (514) | 21 (533) | 21-3/4 (552) | 22-1/2 (572) | 23-1/4 (591) | - |
| 1/2 sweep | 22 (559) | 22-3/4 (578) | 23-1/2 (597) | 24-1/4 (616) | 25 (635) | 25-3/4 (654) | 26-3/4 (679) |
| 1/2 sweep (plus sizes) | - | 23-3/4 (603) | 24-1/2 (622) | 25-1/4 (641) | 26 (660) | 26-3/4 (679) | - |
| Length | | | | | | | |
| extra short | 25 (635) | 25-1/4 (641) | 25-1/2 (648) | 25-3/4 (654) | 26 (660) | 26-1/4 (667) | 26-1/2 (673) |
| short | 26-1/2 (673) | 26-3/4 (679) | 27 (686) | 27-1/4 (692) | 27-1/2 (698) | 27-3/4 (705) | 28 (711) |
| regular | 28 (711) | 28-1/4 (718) | 28-1/2 (724) | 28-3/4 (730) | 29 (737) | 29-1/4 (743) | 29-1/2 (749) |
| long | 29-3/4 (756) | 30 (762) | 30-1/4 (768) | 30-1/2 (775) | 30-3/4 (781) | 31 (787) | 31-1/4 (794) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements in inches (mm) (cont'd)

| JUNIOR SIZES | | | | | |
|---|---|---|---|---|---|
| Sizes | 7 | 9 | 11 | 13 | 15 |
| 1/2 waist | 11-1/4 (286) | 12 (305) | 12-3/4 (324) | 13-1/2 (343) | 14-1/4 (362) |
| 1/2 hip* | 17-3/4 (451) | 18-1/2 (470) | 19-1/4 (489) | 20 (508) | 20-3/4 (527) |
| 1/2 sweep | 21-1/4 (540) | 22 (559) | 22-3/4 (578) | 23-1/2 (597) | 24-1/4 (616) |
| Length | 26-1/4 (667) | 26-1/2 (673) | 26-3/4 (679) | 27 (686) | 27-1/4 (692( |

| MATRONLY SIZES | | | | |
|---|---|---|---|---|
| Sizes | 38 | 40 | 42 | 44 |
| 1/2 waist | 17 (432) | 18 (457) | 19 (483) | 20 (508) |
| 1/2 hip | 23-3/4 (603) | 24-3/4 (629) | 25-3/4 (654) | 26-3/4 (679) |
| 1/2 sweep | 27-1/4 (692) | 28-1/4 (718) | 29-1/4 (743) | 30-1/4 (768) |
| Length | | | | |
| - Short | 28 (711) | 28 (711) | 28 (711) | 28 (711) |
| - Regular | 29-1/2 (749) | 29-1/2 (749) | 29-1/2 (749) | 29-1/2 (749) |
| - Long | 31-1/4 (794) | 31-1/4 (794) | 31-1/4 (794) | 31-1/4 (794) |

3.8.1 Method for measuring. The skirt shall be buttoned, placed flat upon a table and measured as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

1/2 waist - From folded edge to folded edge at center of waistband.

1/2 hip - From folded edge to folded edge across skirt at the following locations at each side fold from bottom edge of waistband:

Extra short - 7-3/8 inches (187 mm) down

*Short - 7-7/8 inches (200 mm) down *(Use this location for measuring Junior sizes.)

Regular - 8-3/8 inches (213 mm) down

Long - 8-7/8 inches (225 mm)

1/2 sweep - From folded edge to folded edge along bottom pre-hemmed edge.

Length - From lower edge of waistband at center front to bottom pre-hemmed edge.

3.9 Workmanship. The finished skirts shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

4.2.2 End item examination. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1609. The skirts shall be classified as Dress ("D") skirts.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each skirt shall be folded in evenly from each side in a lengthwise fold resulting in a bottom width of 9-1/2 inches (241 mm). The top of the skirt shall then be folded over towards the bottom so that the completely folded skirt measures not more than 16-1/2 by 9-1/2 inches (419 by 241 mm). For the larger size skirts, it may be necessary to fold the bottom over in order to achieve the desired folded length dimension. Each folded skirt shall be inserted in a close-fitting flat style clear polyethylene film bag of 0.00125 inch (0.03 mm) thickness (± 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. One end of the bag shall remain unsealed and the bag shall be not less than 1 inch (25 mm) greater than the folded garment. The unsealed opening shall be at the smaller dimension of the bag. Alternatively, the polyethylene bag shall be provided with a tuck or reverse flap.

5.1.1.2 Intermediate packaging. Twenty skirts of one class and size only, unit packaged as specified in 5.1.1.1, shall be packaged in an intermediate fiberboard box conforming to style FTC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. The unit packages shall be arranged two in length, one in width, and ten in depth within a box. Inside dimensions of the box shall be 19 inches (483 mm) in length, 16-1/2 inches (419 mm) in width, and 3-3/4 inches (95 mm) in depth. The box closure shall be secured with 3 inch (76 mm) minimum width gummed paper tape conforming to type III, grade B of PPP-T-45 applied at the center of the length opening and extending along the bottom and up the sides at least two inches (51 mm).

5.1.2 Level C. Skirts shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The contractor may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Eighty skirts, of one class and size only, preserved-packaged as specified in 5.1, shall be packed flat in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packages shall be packed flat four in depth within a shipping container. Inside dimensions of the shipping container shall approximate 20-1/2 inches (521 mm) in length, 18 inches (457 mm) in width, and 17 inches (432 mm) in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspections shall be in accordance with MIL-STD-1609. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes of the same class only may be packed within the same shipping container.

5.2.2 Level B packing. Eighty skirts of one class and size only, preserved-packaged as specified in 5.1, shall be packed flat in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. Level A intermediate packages shall be packed flat four in depth within a shipping container. Inside dimenions of the shipping container shall approximate 20-1/2 inches (521 mm) in length, 18 inches (457 mm) in width, and 17 inches (432 mm) in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with MIL-STD-1609. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes of the same class only may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard shipping containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of PPP-B-636, except that the inspection shall be in accordance with MIL-STD-1609.

5.2.3 Level C packing. Skirts, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes of one class only shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (130 by 100 mm) with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The skirts are intended for wear by female personnel of the Department of Defense as part of the summer uniforms.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Class and size required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to sample of the end item, patterns, and shade samples, address the procuring activity issuing the invitation for bids.

* 6.4 Metric equivalents. Metric equivalents, indicated in parenthesis throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 11

Review activities:

Army - MD
Navy - MC
Air Force - 99
DLA - CT

Preparing activity:

Army - GL

Project No. 8410-0251



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

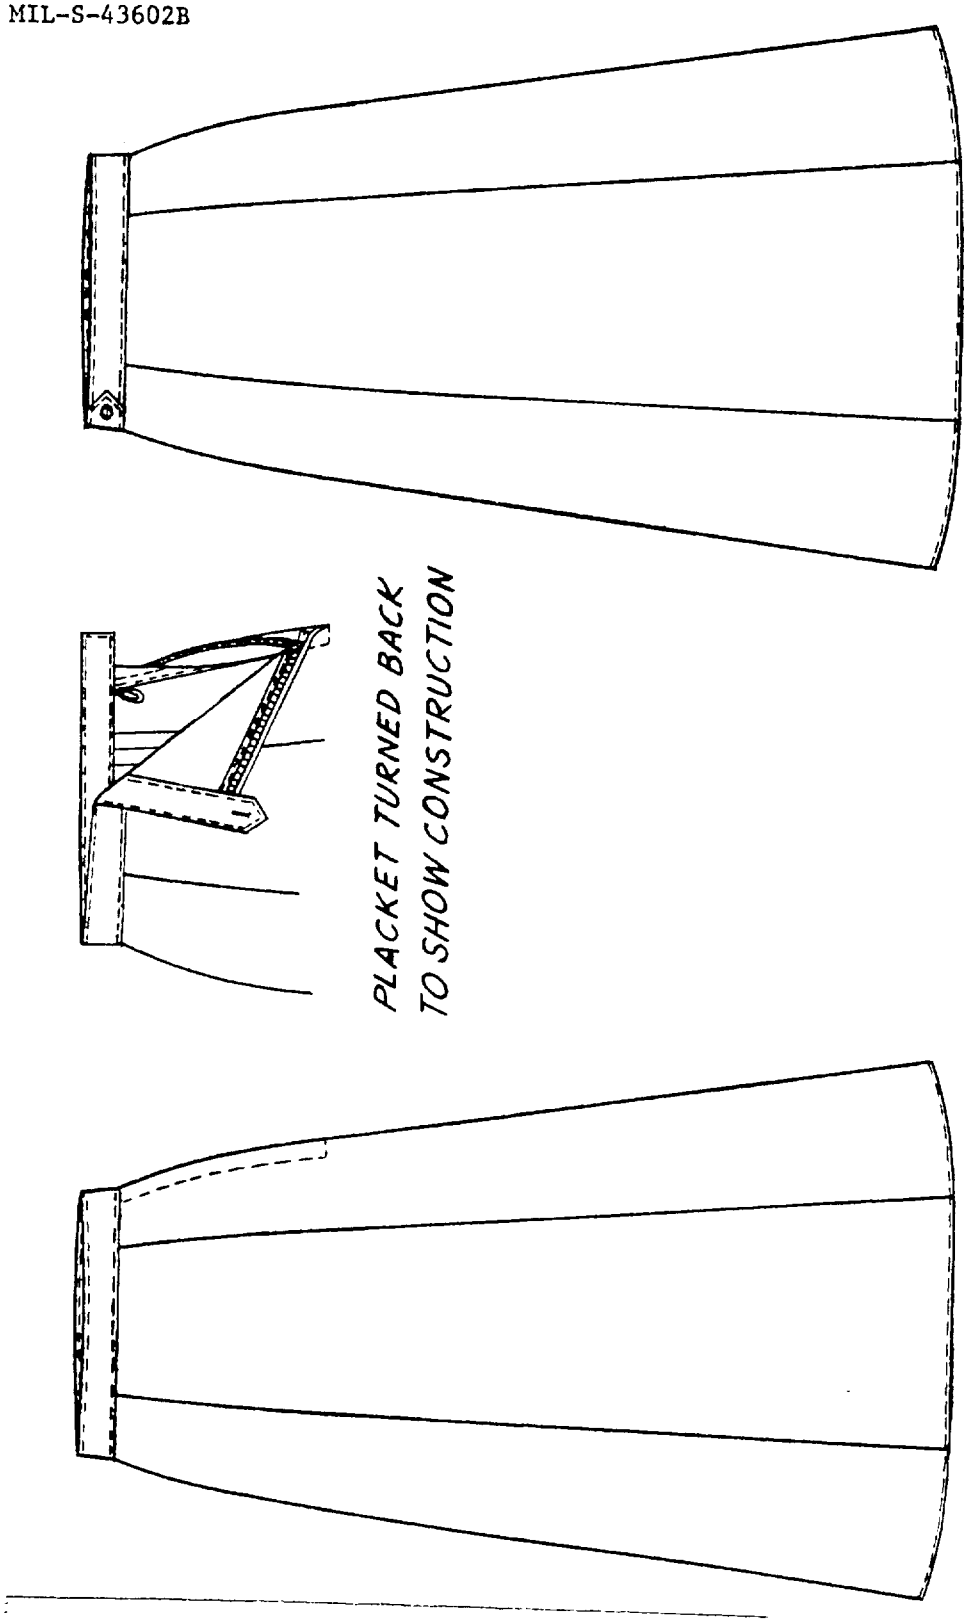



FIGURE 1 - SKIRTS, WOMEN'S, SUMMER



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*INSTRUCTIONS*: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-43602B SKIRTS, WOMEN'S, SUMMER

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.

FOLD

**DEPARTMENT OF THE ARMY**
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

**OFFICIAL BUSINESS**
PENALTY FOR PRIVATE USE $300
DRXNM-TDC

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314




Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TDC
Natick, MA 01760

NATICK OP 1 JUL 77
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:48Z
Check the source to verify that this is the current version before use.