MIL-T-43630B

17 December 1984
SUPERSEDING
MIL-T-43630A
17 September 1974

MILITARY SPECIFICATION

TABLES, FOOD PREPARATION, COMMISSARY STORES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers food preparation tables for use in commissary stores.

1.2 Classification. Tables shall be of the following types and styles as specified (see 6.2). Dimensions specified are in inches and are table top length by width by height respectively.

Type I - Modified rubber top, stainless steel undershelf, 48 by 24 by 36.
Type II - Stainless steel top with two removable cutting boards and undershelf, 72 by 36 by 36.

Style 1 - Square edge.
Style 2 - With backsplash and tapered ends.
Style 3 - With upper shelf.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7320

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-390	-	Plastic Molding and Extrusion Material, Polyethylene and Copolymers (Low, Medium and High Density).
L-P-394	-	Plastic Molding Material, (Polypropylene Plastic, Injection and Extrusion).
PPP-B-601	-	Boxes, Wood-Cleated, Plywood.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-1186	-	Cushioning, Anchoring, Bracing, Blocking and Waterproofing, With Appropriate Test Methods.

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

NATIONAL SANITATION FOUNDATION (NSF)

Standard No. 2 - Food Service Equipment

Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, NSF Building, Ann Arbor, MI 48105.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 167	-	Chromium-Nickel Steel Stainless and Heat Resisting Plate, Sheet, and Strip
A 276	-	Stainless and Heat Resisting Steel Bars and Shapes

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the current version before use.

A 312 - Pipe, Stainless Steel, Seamless and Welded Austenitic
D 2240 - Method of Test for Indentation Hardness of Rubber and Plastics by Means of Durometer
D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Standard product. The food preparation tables, shall be the manufacturer's commercially current standard product except for any changes necessary to comply with document requirements.

3.2 Standards. The food preparation tables covered herein shall conform to applicable requirements of NSF Standard No. 2.

3.2.1 Compliance. Prior to the approval of the first lot, the contractor shall submit to the contracting officer or his authorized representative, satisfactory evidence that the food preparation tables he proposes to furnish under this document meet the applicable requirements of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF Seal on the finished tables, or

(2) A test report, acceptable to the Contracting Officer with the advice of the Army Surgeon General from an independent testing laboratory, indicating that the table has been tested and conforms to NSF.

(3) A certification for the tables issued by NSF under their special one-time contract evaluation/certification service.

3.3 Materials (see 6.3) and components. Materials and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial table provided the completed item complies with all provisions of this document.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the current version before use.

* 3.3.1 Stainless steel.

3.3.1.1 Stainless steel sheet. Stainless steel sheet shall conform to ASTM A 167.

3.3.1.2 Pipe. All pipe shall conform to ASTM A 312.

3.3.1.3 Angles and shapes. All angles and shapes shall conform to ASTM A 276.

3.3.2 Tabletop material, type I.

3.3.2.1 Modified rubber composition. Modified rubber composition board shall be a styrene butadiene rubber (SBR), high styrene rubber compound, or an acrylonitrile butadiene styrene rubber (ABS) and shall be buff in color. The material shall have a finish obtained by pressing a cloth sheet into the top and bottom surfaces or simulating a cloth impression without the use of a cloth sheet. If cloth is used to obtain the finish, the cloth may be left on for protection prior to use. If no cloth is left on the finished material, an easily removable paper or fabric covering, adhered to both sides shall be provided. Instructions for removing the protective covering shall be provided with each tabletop.

3.3.2.1.1 Styrene butadiene rubber. The styrene butadiene rubber shall have a Shore D durometer hardness reading of not less than 55 nor more than 75 and shall weigh not less than 4.5 nor more than 5.0 pounds per square foot per 3/4 inch of thickness when tested as specified in 4.4.1.1.

3.3.2.1.2 Acrylonitrile butadiene styrene rubber. The acrylonitrile butadiene styrene rubber shall have a Shore D durometer hardness reading of not less than 55 nor more than 75 and shall weigh not less than 4.0 nor more than 5.0 pounds per square foot per 3/4 inch of thickness when tested as specified in 4.4.1.1.

3.3.2.2 Plastic. The plastic for the tabletop shall be a virgin high density polyethylene copolymer material conforming to type I, class H, grade 3 of L-P-390 or type I or III B of L-P-394. Clean, unburned plastic material in the form of imperfect parts of the same composition as the virgin material, and produced in the molding or finishing operation, may be reground and mixed with the virgin material. When reground is mixed with the virgin material, the reground shall not exceed a level of 15 percent by weight of the blended mixture. The plastic tabletop shall have a Shore D durometer hardness reading of not less than 55 nor more than 75 and shall weigh not less than 1.75 nor more than 3.5 pounds per square foot per 3/4 inch of thickness when tested as specified in 4.4.1.1.

3.4 Design and construction. Figures 1, 2, and 3 included herein are for illustration purposes only and are not intended to preclude tables otherwise conforming to this document. A plus or minus tolerance of 1/4 inch is applicable to overall table dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

3.4.1 Type I table. The type I table shall be 48 inches long by 24 inches wide by 36 inches high.

* 3.4.1.1 Tabletop. The tabletop shall be two half-length pieces of 3/4 inch thick modified rubber composition specified in 3.3.2.1.1 or 3.3.2.1.2, or plastic material specified in 3.3.2.2. The tabletops shall be adequately supported on all edges by the frame and shall be held in place, on the frame, by tabs or clips specified in 3.4.1.2.

3.4.1.2 Frame. The frame shall consist of four legs with bracing and a top frame welded together to form a rigid assembly. Frame angles shall conform to 3.3.1.3 and shall be 2 by 2 by 1/4 inch. Angles shall be assembled so the 90 degree angle is on the inside with one leg of the angles down. A front to back brace shall be welded midway along the frame length. Two tabs or clips, fabricated from stainless steel, shall be provided on the outside of the frame on each end, front and back. The tabs or clips shall project at least 1/2 inch above the top of the frame.

* 3.4.1.2.1 Legs. Top end of legs shall be either welded to the inside of the frame angles or they may be assembled to gussets with setscrews to form a rigid assembly. Legs shall be braced at both ends, at front, and at back by welding. Bracing shall be located between 8 to 10 inches above the floor. Legs shall be minimum 1-1/2 inch and bracing shall be minimum 1-1/4 inch nominal pipe size conforming to 3.3.1.2. The lower end of each leg shall have an adjustable leveling device in accordance with NSF Standard No. 2.

3.4.1.3 Undershelf. The table shall have an undershelf fabricated of minimum 16 gauge stainless steel conforming 3.3.1.1. The shelf shall be of two half-length pieces with the halves flanged-down 90 degrees where they meet. Edges shall be rolled down to fit leg bracing and the four corners shall be cut out to fit leg radius. The under shelf shall rest flat on the leg bracing and shall be readily removable.

3.5 Type II tables. The side of the table referred to hereinafter as "front" is the working side and the opposite side is referred to herein as "back". All type II tables shall be 72 inches long by 36 inches wide by 36 inches high to table top. Tabletops shall be stainless steel for the back half of the width and modified rubber composition for the front half. Style 1 table shall have a square edge. Style 2 table shall have a tabletop backsplash with tapered ends as specified in 3.5.1.4. Style 3 table shall have a shelf above the tabletop as specified in 3.5.1.5.

* 3.5.1 Tabletops. The back section shall be fabricated of 14 gauge (minimum) stainless steel, flanged down 90 degrees for a distance of 1 inch on all edges, and shall be attached to the top angle frame at ends and back. The front working section of the tabletop shall be 2 readily removable 36 inch by 18 inch by 3/4 inch thick cutting boards specified in 3.3.2. The cutting boards shall be adequately supported on all edges by the frame and shall be held in place, on the frame by tabs or clips specified in 3.5.1.1.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:53Z
Check the source to verify that this is the currentversion before use.

* 3.5.1.1 Frame. The frame shall be constructed as specified in 3.4.1.2 except that additional frame support shall be provided for the front of the stainless steel tabletop section and the rear of the cutting boards. Two tabs or clips shall be provided on the outside of the frame at each end and four at the front (two per cutting board). The tabs or clips shall project at least 1/2 inch above the top of the frame.

3.5.1.2 Legs. Leg construction shall be as specified in 3.4.1.2.1.

3.5.1.3 Undershelf. Undershelf construction shall be as specified in 3.4.1.3.

3.5.1.4 Backsplash. Style 2 table shall have a backsplash and tabletop section extending the full length at the back and half the width of the tabletop. Back section shall be 14 inches high and ends shall be tapered toward the front of the table. The backsplash and tabletop section shall be formed from one piece of minimum 14 gauge stainless steel conforming to 3.3.1.7. The backsplash and tabletop section shall be fastened to the table frame by clips and bolting. One clip shall be provided at each end and two at the back. Top edges of backsplash shall be flanged out 90 degrees and turned down or rolled with a minimum 3/4 inch radius for rigidity.

3.5.1.5 Top shelf. Style 3 table shall have a full length by 10 inches wide removable shelf with an 8 inch high back. The shelf shall have two vertical stainless steel supports continuously welded to the back of the shelf for bolting to back of table frame. Supports shall be of sufficient length to provide a 19 inch space between the tabletop and the horizontal surface of the shelf. Shelf shall be minimum 18 gauge stainless steel conforming to 3.3.1.1. Shelf front, top, and ends shall be flanged down 90 degrees, and turned down or rolled with a minimum 3/4 inch radius for rigidity.

3.6 Welding. Welds shall be sound and shall be free from pits, cracks, holes, or incomplete fusion. Welding rod shall be compatible with the welded components and shall not cause cracking of the base metal. Weld flash, flux, splatter, rough surfaces, and projecting nodules shall be removed.

3.7 Identification marking. Each table shall be permanently and legibly marked on a corrosion-resistant metal plate (e.g. aluminum or stainless steel) or on the frame, with the manufacturer's name or trademark, contract number and date of contract.

3.8 Finish. All exposed metallic surfaces shall be free of rough grind or trimming marks, burrs, slivers, sharp edges, pits, or scale. Stainless steel shall be given a No. 2B or better finish.

3.9 Workmanship. The finished tables shall be clean and well made. Components shall not be fractured, warped, or dented.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1 components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document.

4.2.1.1 Tabletop material (for type I). The table top material shall be tested for hardness in accordance with ASTM D 2240 and shall be weighed to determine conformance to 3.3.2.1.1, 3.3.2.1.2, or 3.3.2.2, as applicable. Three determinations for hardness and weight shall be made on each lot of material submitted for inspection. Any nonconformance shall be cause for rejection of the lot.

4.2.2 End item visual examination. The end item shall be examined for the defects listed in table I. The lot size shall be expressed in units of tables. The sample unit shall be one completely fabricated table. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:53Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects

Examine	Defect	Classification Major	Minor
Finish	Metallic burrs, sharp edges, or slivers	X	
	Rough grind and trimming marks, tool or die marks, drilling marks, pits, or scale	X	
	Modified rubber not finished as specified	X	
	Stainless steel not finished as specified		X
	Embedded foreign matter in modified rubber	X	
	Table frame and legs not stainless steel	X	
	Protective covering missing on modified rubber (if applicable)		X
Welding	Not finished smooth on exposed surfaces	X	
	Not sound (burned-through, cracked, pitted, or undercut)	X	
	Flash or splatter not removed		X
General construction and workmanship	Any component missing (except screws, bolts, nuts, or washers)	X	
	Component cracked or split	X	
	One bolt, nut, screw, or washer missing		X
	Two or more bolts, nuts, screws, or washers missing	X	
	Fastening devices loose		X
Detailed construction	Tabletop not two pieces (type I)	X	
	Sheet not removable (type I)		X
	Frame angles not assembled as specified	X	
	Not correct number of clips		X
	Bracing between legs not as specified	X	
	Leg leveling device not adjustable	X	
	Undershelf edges or corners not formed as specified		X
	Shelf does not rest flat on bracing	X	
	Backsplash not formed as specified (style 2)	X	
	Ends of backsplash not tapered (style 2)		X
	Edges of backsplash not formed as specified (style 2)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Detail construction (cont'd)	Working side of the table not in two pieces as specified for type II, style 1, 2, and 3	X	
	Shelf front and ends not formed as specified (style 3)	X	
	Undershelf not readily removable	X	
	Two-piece shelf not flanged	X	
	Backsplash, shelf, or cutting board not removable	X	
Identification marking	Missing, not legible, not as specified		X

4.2.3 End item dimensional examination. The end item shall be examined for conformance to the specified dimensions. Any dimension not within the specified tolerance shall be classified a defect. The lot size shall be expressed in units of tables. The sample unit shall be one completely fabricated table. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.2.4 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with section 5 requirements. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully packaged. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0

TABLE II. Packaging defects

Examine	Defect
Marking (exterior and interior container)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any nonconforming component: component missing or damaged.

4.2.4.1 Examination of palletization. An examination shall be made to determine that palletization complies with section 5 requirements. Defects shall be as indicated in table III. The sample unit for this examination shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

TABLE III. Palletization defects

Examine	Defect
Finished dimension	Length, width, or height, exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.3 Standard compliance. The contractor shall submit to the Government representative, proof of compliance with the requirements of NSF as specified in 3.3.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. The modified rubber table top shall be wrapped in minimum 60-pound basis weight (24 by 36 - 500) kraft paper, replaced in position and secured to the table with filament-reinforced pressure-sensitive tape. The undershelf shall be strapped in place with one metal strap centered on the shelf. The upper shelf of the type II, style 3 table and backsplash of the style 2 table shall be disassembled from the table and the attaching hardware placed in a cotton cloth drawstring bag and the bag secured to one of the mating parts.

5.1.2 Commercial. Each table shall be preserved in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. Each table, preserved as specified in 5.1, shall be packed in a cleated-plywood shipping container conforming to overseas type, style A or B, type 3 load of PPP-B-601. The upper shelf of the type II, style 3 table and backsplash of the style 2 table shall be secured in an unused portion of the shipping container. Cushioning, blocking and bracing, and waterproofing shall be in accordance with MIL-STD-1186. Each shipping container shall be provided with skids and closed and strapped in accordance with PPP-B-601.

5.2.2 Level B packing. Each table, preserved as specified in 5.1, shall be packed as specified in 5.2.1, except that the shipping container shall conform to domestic type, style A or B, type 3 load of PPP-B-601 and waterproofing shall not be required.

5.2.3 Commercial packing. Tables, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. Food preparation tables are intended for use in the preparation of food in commissary stores. Type II tables are primarily intended for meat boning and trimming.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type and style table required (see 1.2).
c. Selection of the applicable levels of preservation and packing (see 5.1 and 5.2).

6.2.1 Contract data requirements. Any data items to be delivered under any contract for the items should be specifically called for in the contract in accordance with the applicable regulations of the contracting activity.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T21:53Z
Check the source to verify that this is the current version before use.

* 6.3 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.3).

6.4 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 99

Review activities:

Army - MD
Air Force - 84
DLA - GS

Preparing activity:

Army - GL

Project No. 7320-0747

U S GOVERNMENT PRINTING OFFICE 1985-505-038/20466

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

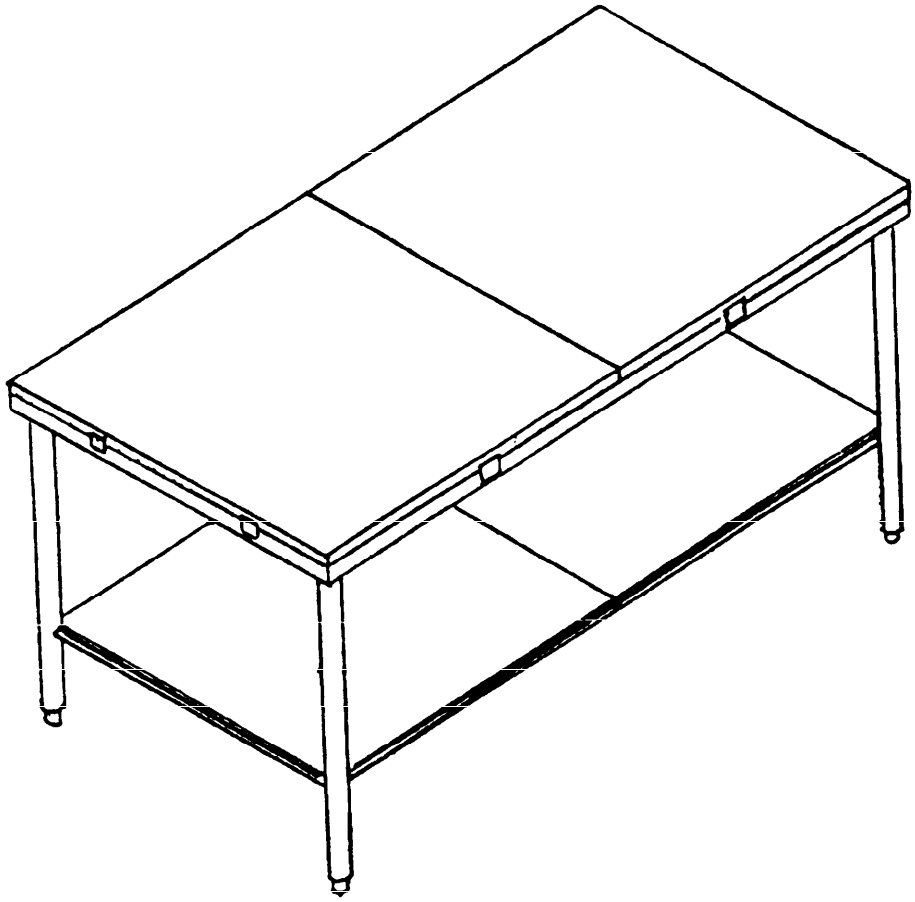


FIGURE 1 - TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

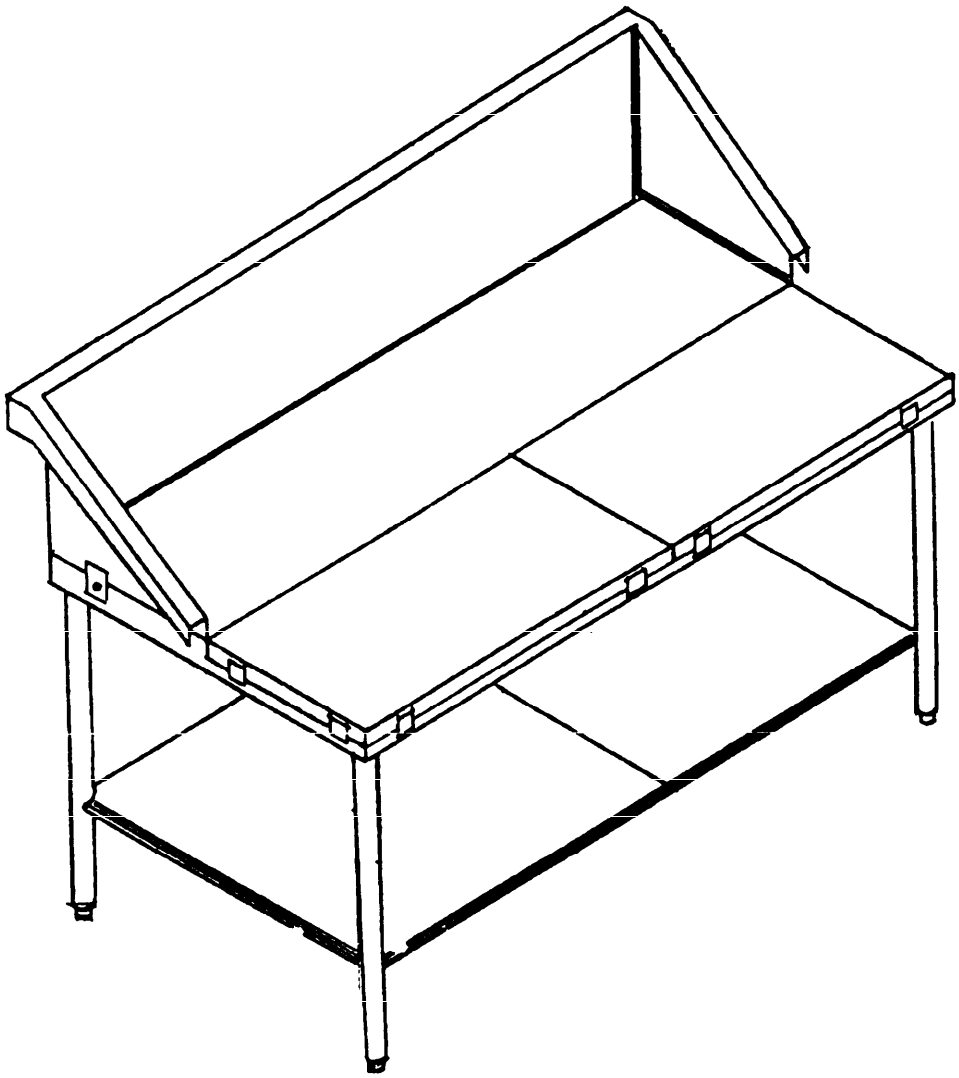


FIGURE 2 - TYPE II, STYLE 2

Source: https://assist.dla.mil -- Downloaded: 20261O-21T21:53Z
Check the source to verify that this is the currentversion before use.

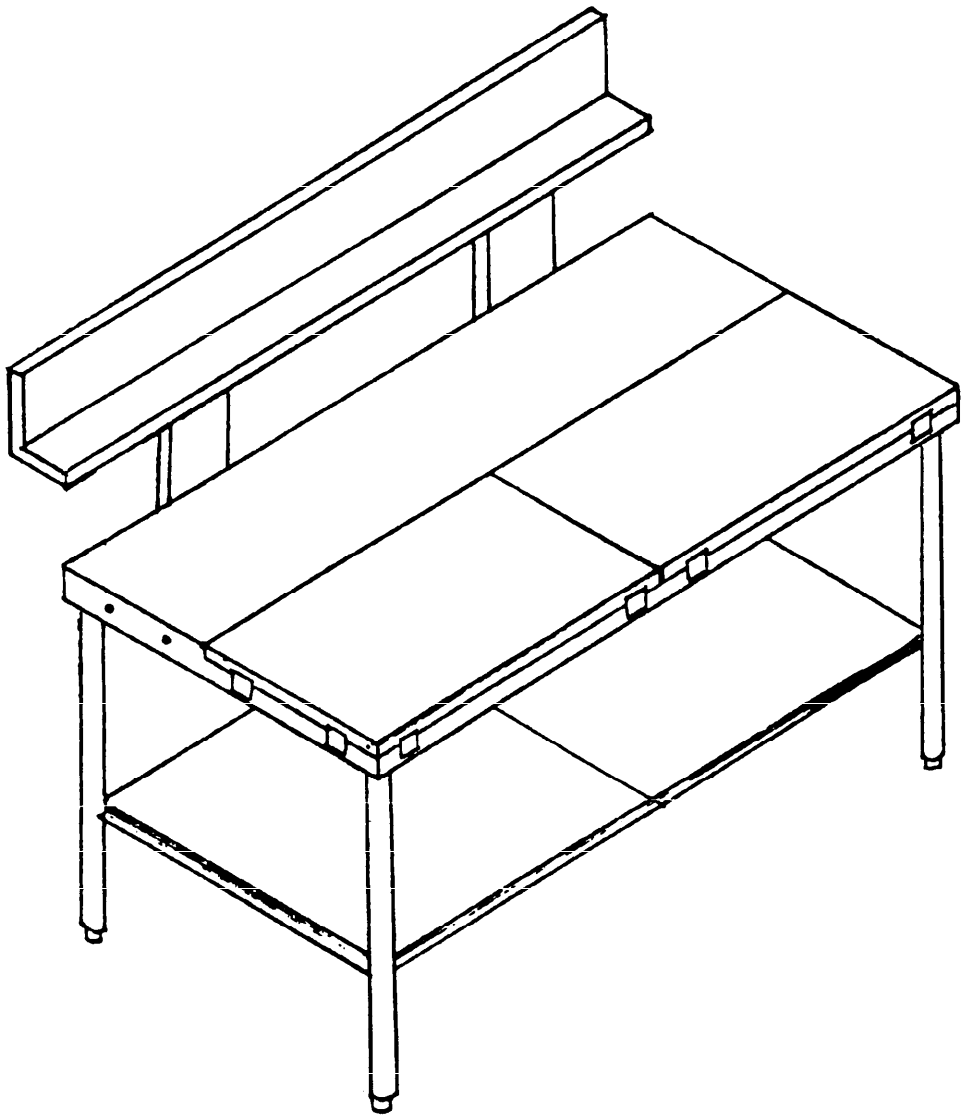


FIGURE 3 - TYPE II, STYLE 3*

*TYPE II, STYLE 1 SIMILAR TO STYLE 3 EXCEPT FOR SHELF

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US ARMY NATICK RESEARCH
and DEVELOPMENT CENTER
ATTN STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research
and Development Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-43630B	Tables, Food Preparation, Commissary Stores

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 20 Nov 84

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:53Z
Check the source to verify that this is the current version before use.