23 September 1968

MILITARY SPECIFICATION

UNDERSHIRT, INFANT'S

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an infant's double breasted, wraparound type, long sleeved, cotton undershirt in one size.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton.
CCC-T-191	-	Textile Test Methods.
DDD-L-20	-	Label; for Clothing, Equipage and Tentage (General Use).
DDD-T-86	-	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed).
PPP-B-636	-	Box, Fiberboard.
PPP-B-676	-	Boxes, Set-up.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105	-	Sampling Procedures and Table for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

STANDARD:

MILITARY

MIL-STD-147 - Palletized and Containerized Unit Loads 40" X 48" 4-Way (Partial) Pallet Skids, Runners, or Pallet-Type Base.
MS 16686 - Medical Services Symbol.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Samples.-

3.1.1 Guide samples.- Guide samples of the end item, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 First article.- When specified (see 6.2), before production is commenced, a preproduction sample of the finished item shall be submitted or made ready for the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.2 Material.-

3.2.1 Cloth.-

3.2.1.1 Body cloth.- The knitted body cloth shall be made of singles or 2-ply combed cotton yarn. The cloth shall be a 1 x 1 ribbed knit and shall have a minimum of 20 wales and 30 courses per inch, and a minimum bursting strength of 90 pounds. Testing shall be as specified in 4.3.1.1.

3.2.1.2 Binding cloth.- The knitted cloth used for the binding shall be made of singles or 2-ply, combed cotton yarn. The cloth shall be circular knit with a flat (jersey) stitch and shall have a minimum of 30 wales and 26 courses per inch. Testing shall be as specified in 4.3.1.1.

3.2.1.3 Non-fibrous material content.- The starch and protein content, including chloroform-soluble material of the finished cloths shall not exceed 6 percent when tested as specified in 4.3.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

3.2.1.4 Finish and color.- All of the knitted cloths shall be scoured and bleached white.

3.2.2 Tape, cotton.- The cotton tape used for the tie strings shall conform to type III, class 2, 3/8 inch width of DDD-T-86.

3.2.3 Thread, cotton.- The cotton thread for seaming and stitching shall be ticket number 70, 3 ply, type IA2 of V-T-276 and shall be bleached white.

3.2.4 Sewing yarn.- The cover and looper threads used with stitch type 606 and the cover thread used with stitch types 602, 603, 604, 605 and 607 shall be combed peeler cotton sewing yarn conforming to the requirements specified in table I when tested as specfied in 4.3.1.1.

TABLE I.- Requirements for sewing yarn

Yarn size	Yards per lb. (min.)	Breaking strength (min.)
30/2	11,000	1.65 lbs.
28/1	21,000	0.50 lbs.

3.3 Design.- The undershirt shall be a double-breasted, wraparound type with a one piece body, long sleeves, six tie tapes and border around neckline and down fronts (see figure 1).

3.4 Construction.-

3.4.1 Stitches, seams and stitchings.- Stitches, seams and stitching types specified in table II shall conform to Fed. Std. No. 751. The minimum and maximum number of stitches per inch shall be as specified in table II. Whenever two or more methods of seams and stitchings are given for the same part of the operation, any one of them may be used.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:47Z
Check the source to verify that this is the currentversion before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	Cover Thread	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
						NEEDLE	BOBBIN or LOOPER
1.	Overedge stitch ends of sleeves	70-3	504 or	EFd-1	12-16	70-3	70-3
		70-3	505	EFd-1	12-16	70-3	70-3
2.	Tapes.- Six tie tapes shall be attached to the undershirt as specified as specified in operations 3, 4 and 5. All tapes shall be bartacked vertically 1/2 ± 1/8 inch in length. Free end of tapes shall be a minimum of six inches. All tape locations shall be made from center of tape.	-	Bartack	-	28 per Bartack	70-3	70-3
3.	Seam shoulders, armholes and sleeves.- Seam shoulders, armholes and underside of sleeves and continue sleeve stitching down each side 1-1/2 to 1-3/4 inches below armhole, catching tape 1 ± 1/4 inch below armhole. On left outer flap, tape shall be folded under 1 ± 1/8 inches to form a double thickness for buttonhole and caught in stitching.	30/2	604 or	LSa-1	12-16	70-3	70-3
		30/2	605 or	LSa-1	12-16	70-3	70-3
		30/2	606 or	FSa-1	12-16	70-3	28/1
		30/2	607	FSa-1	12-16	70-3	70-3
4.	Seam binding around neck and fronts.- The binding shall be cut with the wales running lengthwise and shall finish 5/16 to 3/8 inch wide. Raw edges must be covered by stitching. Seam binding around neck and down fron edge to bottom of shirt. On right under flap, one tape shall be caught on inside of binding 6 ± 1/4 inches from bottom of shirt. On left outer flap two tapes shall be caught on inside of binding; bottom tape to be 2-1/4 ± 1/4 inches from bottom of shirt and top tape to be 3-3/4 ± 1/4 inches from bottom tape.	30/2	602 or	BSa-1	12-16	70-3	70-3
		30/2	603	BSa-1	12-16	70-3	70-3

AMXRE Form 423
10 February 1965

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:47Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	Cover Thread	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
						NEEDLE	BOBBIN or LOOPER
5.	Right outside bottom tape.- The right outside bottom tape shall be folded under 1/4 to 3/8 inch before bartacking and shall be 2-1/4 ± 1/4 inches from bottom of shirt and in line with tape caught in sleeve stitching.						
6.	Make buttonhole.- Make a 1/2 to 5/8 inch horizontal buttonhole in tape on left outer flap. Buttonhole to be centered on 1 ± 1/8 inches turn under.	-	304	-	46-52 per button-hole	70-3	70-3
7.	Finish bottom of shirt.- Overedge stitch bottom of shirt, covering ends of front binding. The beginning and the end of the overedge stitching shall be stitched back 3/4 to 1 inch.	70-3	504 or 505	EFd-1	12-16	70-3	70-3
8.	Clean shirt.- Trim and remove raw edges and ends of thread on inside and outside of garment. Remove all spots and stains.						
9.	Press shirt smooth.						

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:47Z
Check the source to verify that this is the current version before use.

3.4.2 Thread breaks and end of seams.- Ends of all seams and stitching, when not caught in other seams or stitching shall be tacked. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch.

3.5 Manufacturing operations requirements.- The undershirts shall be manufactured in accordance with the operation requirements specified in table II. The material must be cut so that the finished items conform to the measurements of fig. 1. The supplier is not required to follow the exact sequence of operations.

3.6 Label.- Each undershirt shall be marked on the outside of the inside flap of the double-breasted section, centered therein, with the bottom of the marking approximately one inch above the bottom edge of the garment. The marking shall conform to type III or IV, class 9 of DDD-L-20 and shall show fastness as specified for class 5 labels. The marking shall include the stock number and the manufacturer's name in characters of approximately 1/4 inch. In addition, the marking shall include a caduceus approximately one inch in height centered between the letters "U" and "S" of appropriate size conforming to type I of MS16686.

3.7 Measurements.- The measurements of the finished undershirt shall be as specified on figure 1.

3.8 Weight.- The minimum weight per dozen undershirts shall be 24 ounces.

3.9 Workmanship.- The finished undershirts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required, the preproduction sample submitted in accordance with 3.1.2 shall be inspected as specified in 4.3.2.1 and 4.3.2.2 for compliance with the design, construction, workmanship and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:47Z
Check the source to verify that this is the currentversion before use.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 Testing of components.- In addtion to the quality assurance provisions of the referenced specifications, components and materials listed in table IV shall be tested for the characteristics shown therein. The methods of testing specified in CCC-T-191, wherever applicable and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with table III and the lot shall be unacceptable if one or more units fail to meet any of the requirements specified.

TABLE III.- Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE IV.- Component tests

Component and lot size expressed in terms of	Characteristic	Requirement reference	Test method	Sample unit
Body cloth (ribbed knit) 1 yard	Yarn ply	3.2.1.1	1/	2 yards
	Combed cotton	3.2.1.1	1/	
	Type of knit	3.2.1.1	Visual 2/	
	Texture:			
	Wales	3.2.1.1	5070	
	Courses	3.2.1.1	5070	
	Bursting strengh	3.2.1.1	5120	
	Non-fibrous material	3.2.1.3	2611	
	Finish and color	3.2.1.4	1/	

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:47Z
Check the source to verify that this is the currentversion before use.

TABLE IV.- Component tests (cont'd)

Component and lot size expressed in terms of	Characteristic	Requirement reference	Test method	Sample unit
Binding cloth (jersey knit) 1 yard	Yarn ply	3.2.1.2	1/	1 yard
	Combed cotton	3.2.1.2	1/	
	Type of knit	3.2.1.2	Visual 2/	
	Texture:			
	Wales	3.2.1.2	5070	
	Courses	3.2.1.2	5070	
	Non-fibrous material	3.2.1.3	2611	
	Finish and color	3.2.1.4	1/	
Sewing yarn 1 spool, cone or tube	Combed peeler cotton	3.2.4	1/	1 spool, cone or tube
	Yarn size	Table I	4020	
	Ply	Table I	1/	
	Yards per pound	Table I	4010	
	Breaking strength	Table I	4100	

1/ Unless otherwise specified, a certificate of compliance is required and will be acceptable for the requirements stated.

2/ One determination per sample unit and the results reported as "pass" or "fail".

4.3.2 Examination of the end item.- Defects found during this examination shall be classified in accordance with lists shown in 4.3.2.1 and 4.3.2.2. The sample unit for these examinations shall be one undershirt. The lot size shall be expressed in units of one undershirt. The inspection levels and acceptable quality levels for these examinations shall be in accordance with 4.3.2.3.

4.3.2.1 Visual examination.- The undershirt shall be visually examined for defects listed in table V.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:47Z
Check the source to verify that this is the current version before use.

TABLE V.- Classification of defects

Examine	Defect	Classification Major	Minor
Material defects	Hole, cut, tear, drop stitch, thin area, mends, any.	X	
	Any slub more than twice the thickness of normal yarn.		X
	Any accumulation of slubs, clearly visible*, causing non-uniform overall appearance.		X
	Rowey yarn or tiger stripes.		X
	Loose knitting causing sleziness.		X
Seams and stitching	Wrong seam type.	X	
	Wrong stitch type.	X	
	Any seam twisted, puckered or pulled, affecting appearance.		X
	Needle chew.	X	
	Tight tension (stitches break when normal strain is applied to seam or stitching).		X
	Loose tension resulting in a loosely secured seam.		X
	Stitches per inch more or less than specified.		X
	Any open seam.	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more successive skipped stitches occur.		
	Any raw edge protruding more than 1/8 inch along 1/2 inch or more of seam.		X
	Ends of seams not tacked or caught under other seams.		X
	Thread breaks backstitched less than 1/2".		X
	Any bartack missing or not as specified.	X	
	Overedge stitching on bottom not backstitched 3/4 to 1 inch.		X
Components	Any component missing or other than specified.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

TABLE V.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Binding	Incomplete.	X	
	Twisted or puckered, clearly visible*.		X
	Wales not extending in direction of the length.		X
	Ends of binding not caught in bottom overedge stitching.		X
Tapes	One or more tapes insecurely attached, misplaced, not serving intended purpose or causing clearly visible* gaping or distortion of closed undershirt.	X	
	Free end of tape less than 5 inches long.	X	
	Free end of tape less than 6 but not less than 5 inches long.		X
	Left outside tape not folded under to form double thickness for buttonhole.		X
Sleeves	Twisted or puckered, clearly visible*.		X
	Poorly shaped affecting appearance.		X
	Overedge stitching omitted at sleeve ends.	X	
Buttonhole	Omitted.	X	
	Misplaced, resulting in a distorted front.	X	
	Not as specified.		X
Bottom of shirt	Overedge stitching omitted.	X	
Cleanness	Spot or stain.		X
	Objectionable odor.	X	
	Overall uncleanness.		X
Marking	Missing, incorrect, illegible or not properly placed.		X

*At normal inspection distance (approximately 3 feet)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

4.3.2.2 Examination for measurements.- Before the examination is performed, the samples shall be conditioned in normal atmosphere and in a relaxed supported state for a minimum of 1 hour. Any measurement smaller or greater than the dimensions (including tolerances) specified on figure 1 shall be classified a defect.

4.3.2.3 Inspection levels and acceptable quality levels (AQLs).- The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

Examination	Inspection Level	AQL	
		Major	Major and minor combined
4.3.2.1	I	1.5	4.0
4.3.2.2	S-3	6.5	(1 class)

4.3.3. Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed shall be examined on shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container. Polyethylene bags heat sealed seams open, non-continuous or crooked; vent hole missing or greater than 1/4 inch diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of intermediate packages per shipping container is more or less than required. Number of undershirts per intermediate package is more or less than required. 1/

1/ For this defect, two intermediate packages shall be examined from each shipping container in the sample.

4.3.4 Testing of the end item.- The finished undershirt shall be tested to determine conformance with the weight requirement specified in 3.8. The lot size shall be expressed in units of one undershirt and the sample unit shall be twelve undershirts. The sample size shall be in accordance with table III and the lot shall be unacceptable if one or more sample units fail to meet the requirement specified. The twelve undershirts encompassing the sample unit for test shall be allowed to reach equilibrium under standard conditions as defined in CCC-T-191. Upon reaching equilibrium, the twelve undershirts shall be weighed as a unit under standard conditions and the results reported to the nearest 1.0 ounce.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Unit package.- Each undershirt shall be laid front down, the sides and sleeves folded in over the back and the bottom brough up to the neck to approximate dimensions of 6 by 6 inches. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (± 20% tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight and continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.1.2 Intermediate packaging.- Twenty-four undershirts unit packaged as specified in 5.1.1.1 shall be placed in a set-up paperboard box conforming to type II, variety I, class A, style 4 of PPP-B-676. Inside dimensions of the set-up box shall be 12 inches in length, 12 inches in width and 3-3/4 inches in depth. The depth of the cover shall be 1 inch.

5.1.2 Level C.- Undershirts shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.- Two hundred and eighty-eight undershirts packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed on end, three in length, four in width and one in depth. Inside dimensions of each container shall approximate 37-1/4 inches in length, 16-1/2 inches in width, and 12-1/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, waterproofed, and reinforce with strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Two hundred and eighty-eight undershirts packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed on end, three in length, four in width and one in depth. Inside dimensions of each container shall approximate 37-1/4 inches in length, 16-1/4 inches in width, and 12-1/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- Undershirts, packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Palletization.- Unless otherwise specified (see 6.2), undershirts packed as specified in 5.2 shall be palletized in accordance with Load Type I of MIL-STD-147, except that for overseas shipment the over-all height of the load shall not exceed 43 inches. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L of MIL-STD-147. Container patterns shall be in accordance with the appendix of MIL-STD-147. If the container is of a size which does not conform to any of the container patterns specified in MIL-STD-147, the container pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, intermediate packages, shipping containers and palletized loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The undershirts covered by this specification are intended for use by Medical agencies.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:47Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) First article.- When a preproduction sample is required (see 3.1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) When palletization is not required (see 5.3).

6.3 Sample.- For access to samples, address the procuring office issuing the invitation for bids.

Custodians:

Army - GL
Navy - MS
Air Force - 03

Preparing activity:

Army - GL

Project No. 6532-1021

Review activities:

Army - MD
DSA - DM

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

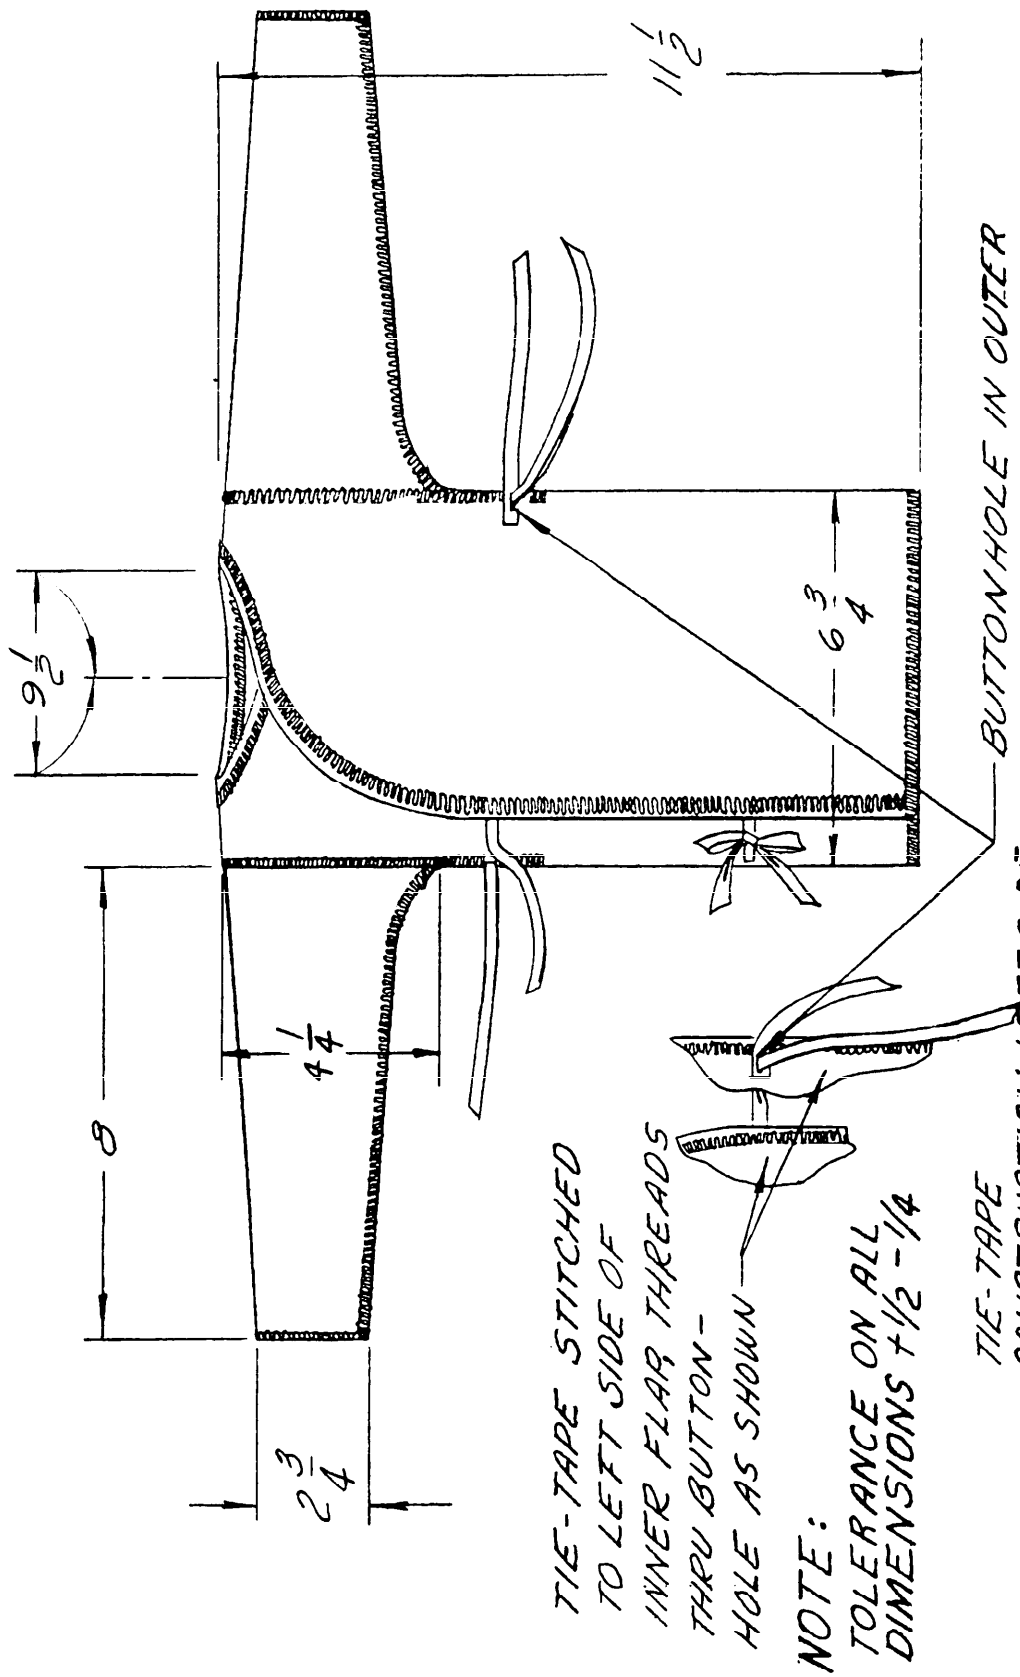


FIG 1- UNDERSHIRT, INFANTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION
Undershirt, Infant's MIL-U-43596

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

343-220 (A-376)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:47Z
Check the source to verify that this is the current version before use.