
MILITARY SPECIFICATION

BATTERY, STORAGE: SILVER-ZINC, VENTED; BB-560( )/PRC-104, 6 VDC (NOMINAL)

This specification sheet is approved for use by the Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the battery described herein shall consist of this document and the latest issue of MIL-B-29362/1(MC).

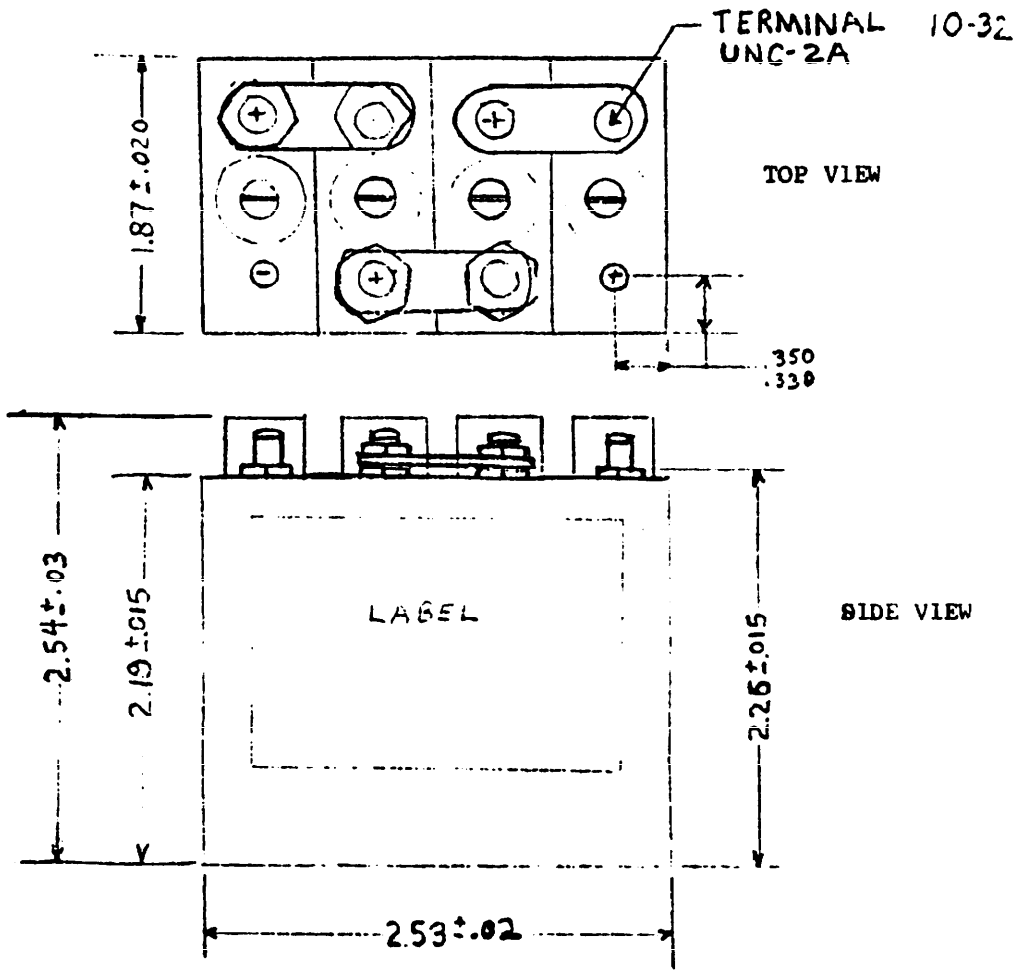

BB-560()/PRC-104
BATTERY STORAGE, SILVER-ZINC


FSC 6140

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:33Z
Check the source to verify that this is the current version before use.

1. Spacing between terminal studs of adjacent cells shall be equal and uniform. Terminal orientation of the battery shall be that shown on specification sheet.

2. The cell venting device shall have a #8-32NC-2A thread for attachment to the cell cover and it shall meet the requirements of the specification. It shall be removable and replaceable with ordinary tools. The valve shall reseal at the lower pressure specified after being tested to open at or below the higher specified pressure valve.

3. Intercell connectors are copper, cold rolled, half hard per QQ-C-576, finish M312 of MIL-F-14072 as follows.

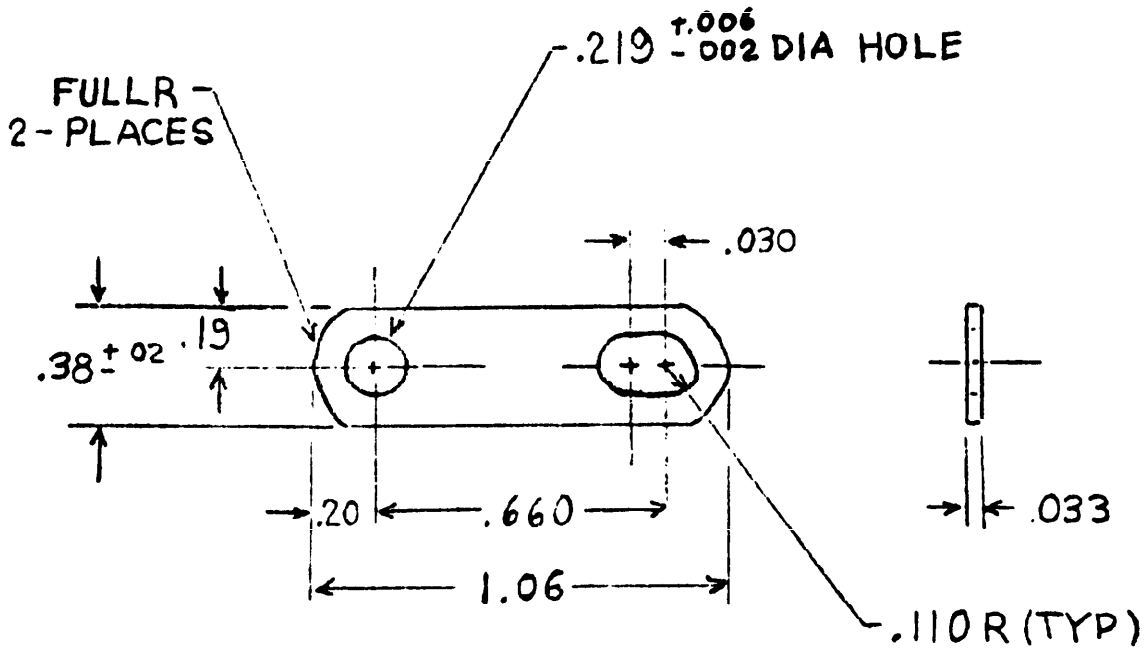

MATERIAL: COPPER, COLD-ROLLED, HALF HARD PER QQ-C-576
FINISH M312 OF MIL-F-14072

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: The requirements below are minimum values except where otherwise noted.

Rated Capacity (C_5)	6.0 Ah
Weight (Maximum)	410 gms.
Voltage	
(1) Maximum (OCV):	7.44 V
(2) Nominal:	6.00 V
(3) Final:	5.0 V
Operating temperature range	
(1) High:	$60^{\circ}C + 3^{\circ}C, -0^{\circ}C$
(2) Standard:	$22^{\circ}C \pm 3^{\circ}C$
(3) Low:	$-17^{\circ}C + 0^{\circ}C, -3^{\circ}C$

Discharge Rates	5 Sec Voltage	Final Voltage	Current
C/5	--	5.0	1.2 A
1 C_5	5.5 V	5.0	6.0 A
Transceiver (9.5 min receive/0.5 min transmit)		5.0	0.1 A/4 A
Cycle life 9.5 min low/0.5 min high		5.0	0.84 A/4 A

Charging Requirements

Maximum Current	0.6 A
Minimum Current	0.4 A
Maximum Time	20 hours
Maximum Time (Cycle life)	9.5 hours
Cutoff Voltage	8.1 + 0.1, -0.05 V

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:33Z
Check the source to verify that this is the current version before use.

Inspections	Discharge Rate	Requirement
1. Activation and Initial Filled Discharge	1.2 A	6 Ah
2. Full Capacity Discharge (9.5 min/0.5 min)	0.1 A/4 A	20 hours
3. High Rate Discharge	6 A	4.8 Ah
4. Low Temperature Discharge	1.2 A	3.0 Ah
5. Retention of Charge		
(1) High Temperature Storage 7 days	1.2 A	4.8 Ah
(2) Normal Temperature Storage 28 days	1.2 A	5.4 Ah
6. Cycle Life (50 cycles)	0.84 A/4 A	4.8 Ah (cycle 25) 3.6 Ah (cycle 50)
7. Gassing	--	0.8ml/hr per cell maximum
8. Thermal Shock (dry)	--	3.11.5.1
9. Shock Test	--	3.11.4
10. Vibration	1.2 A	3.11.4(6 Ah)
11. Altitude	--	3.11.6
12. Storage (Activated) 6 months at standard conditions	1.2 A	3.6 Ah

Preparing Activity
Navy - MC
Project No. 6140-N471

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:33Z
Check the source to verify that this is the currentversion before use.