MILITARY SPECIFICATION

CRANE, WHEEL-MOUNTED: HYDRAULIC, ROUGH TERRAIN, 30-TON CAPACITY, FULL REVOLVING, 4 BY 4, DED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type diesel-engine-driven, 4 by 4, wheel mounted, 360 degree full revolving, hydraulically operated, 30-ton capacity, rough terrain crane.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

TT-E-485	Enamel, Semi-gloss, Rust-inhibiting.
TT-E-529	Enamel, Alkyd, Semi-gloss.
VV-F-800	Fuel Oil, Diesel.

MILITARY

MIL-V-173	-Varnish, Moisture and Fungus Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-P-514	-Plate, Identification, Instruction and Marking, Blank.
MIL-T-704	-Treatment and Painting of Materiel.
MIL-C-1283	-Can, Gasoline, Military, 5-gallon.
MIL-L-2104	-Lubricating Oil, Internal-Combustion, Engine, Heavy-Duty.
MIL-C-3580	-Cranes, and Crane-Shovels, Truck, Crawler, and Wheel Mounted, Full-Revolving, and Their Attachments, Packaging of.
MIL-T-5624	-Turbine Fuel, Aviation, Grades 2P-4 and 2P-5.
MIL-G-10924	-Grease, Automotive and Artillery.
MIL-L-11025	-Lead, Pile-Driver; With Catwalk.
MIL-H-13531	-Hose, Rubber and Hose Assembly, Rubber (Hydraulic, Flexible).
MIL-H-21103	-Hammer, Pile Driver, Self-Powered, Diesel.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:30Z
Check the source to verify that this is the current version before use.

MIL-M-43719-Marking Materials and Markers, Adhesive, Elastomeric Pigmented, General Specification For.
MIL-G-46795-Generator System, Alternator, Rectifier, 60 Amperes, 28 Volts.

STANDARDS

FEDERAL

FED-STD-595-Colors

MILITARY

MIL-STD-129 -Marking for Shipment and Storage.
MIL-STD-130 -Identification Marking of U. S. Military Property.
MIL-STD-209 -Slinging and Tiedown Provisions for Lifting and Tying Down Military Property.
MIL-STD-461 -Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-642 -Identification Marking of Combat and Tactical Transport Vehicles.
MS-35000 -Battery, Storage, Lead-Acid, Waterproof.
MS-51064 -Pulley Groove, Engine Accessory Drive Belts.

DRAWINGS

U. S. ARMY TANK AUTOMOTIVE COMMAND

1920787712407 - Mounting Kit M14 Rifle.
1920711682345- Connector Receptacle, Electrical-Slave, 2 contact, 24 Volt, Waterproof.

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

DEPARTMENT OF TRANSPORTATION (DOT)

Motor Carrier Safety Regulations.

(Application for copies should be addressed to Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

Z26.1 - Standard Safety Code for Safety Glazing Materials for Glazing Motor Vehicles Operating on Land Highways.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, New York 10018.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC. (NMFTA)

National Motor Freight Classification Rules.

(Application for copies should be addressed to the American Trucking Association, 1616 P Street, N. W., Washington, D. C. 20036.)

POWER CRANE AND SHOVEL ASSOCIATION (PCSA)

Standard No. 2 - Mobile Hydraulic Crane Standards.

(Application for copies should be addressed to the Power Crane and Shovel Association, Marine Plaza, Suite 1700, 111 E. Wisconsin Avenue, Milwaukee, Wisconsin 53202.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

J534 - Standard for Lubrication Fittings.
J542 - Starting Motors.
J544 - Starting-Motor and Generator Curves.
J765 - Crane Load Stability Test Code.
J931 - Hydraulic Power Circuit Filtration.
J958 - Nomenclature and Dimensions for Crane Shovels.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., Two Pennsylvania Plaza, New York, New York 10001.)

UNIFORM CLASSIFICATION COMMITTEE (UCC)

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:30Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. The first article is defined as a production model which will be identical to the product which the supplier will subsequently produce in fulfillment of the contract. As soon as practicable after award of contract or order and prior to submission of any complete units for final acceptance, one first article shall be tested under the direction and supervision of the Government inspector to determine conformance to this specification. The first article shall be tested as specified herein. Approval of the first article by the activity concerned shall not relieve the contractor of his obligation to supply equipment conforming to this specification. Any changes or deviations of production units from the first article shall be subject to the approval of the contracting officer.

3.2 Materials. Materials shall be as specified herein. Material not definitely specified shall be of the same quality used for this purpose in commercial practice, free from all defects which affect serviceability and appearance of the finished product.

3.2.1 Fungus resistance. Electrical connections, including terminal and circuit connections, components, and circuit elements shall be coated with varnish conforming to MIL-V-173 except that:

(a) Components and elements inherently inert to fungi or hermetically sealed need not be treated.

(b) Components and elements whose operation will be adversely affected by the application of varnish shall not be treated.

3.3 Design. The crane shall consist essentially of a four-wheel drive, coordinated four-wheel steer, crab steer, pneumatic-tired, diesel-engine powered, 4 by 4, carrier. The carrier shall be equipped with a full revolving superstructure with a cab and a basic hydraulic telescoping boom of not less than 26 feet retracted working radius, when measured in a horizontal position between center of rotating platform to center of boom sheaves, and capable of extending to a working radius of not less than 73 feet when measured with the boom in a horizontal position. The turning radius of the crane shall be not more than 25 feet as defined in SAE J958. The crane shall be capable of operating in 60 inches of water.

3.3.1 Carrier. The carrier shall consist of a heavy steel fabrication type frame with necessary braces and reinforcements to provide rigid support for the revolving superstructure, hoisting drums, ropes, hook block, and cab, under maximum load, when the telescopic boom is extended at minimum through maximum radii at any position within the 360-degree rotation. The revolving superstructure shall be positioned on the carrier frame to permit maximum efficiency for all purpose crane operations. The carrier shall be capable of two- or four-wheel drive at the selection of the operator, with two-wheel steer on the front axle, and with four-wheel coordinated and crab steer available at the selection of the operator.

Source: https://assist.dla.mil --Downloaded: 202640-20T22:30Z
Check the source to verify that this is the current version before use.

The angles of approach and departure shall be not less than 21 degrees. All wheels shall be equipped with interchangeable pneumatic tires. The carrier shall be capable, with complete unit in travel position, of traveling over rough and unpaved terrain, sandy beaches and shallow water beaches under adverse conditions as encountered in normal combat field operations, and over paved roads at maximum speed with the capability of negotiating a grade up to 15 percent at not less than 3.0 miles per hour (mi/h). Full hydraulic steering for the front wheels shall be provided. The carrier shall be equipped with wheel fenders.

3.3.2 Crane assembly. The crane assembly, designed for carrier mounting, shall consist of a fully revolving superstructure with boom support, sectional extendible boom, a main hoisting drum with wire rope, an auxiliary hoisting drum with wire rope, clamshell tagline assembly, main hook block, auxiliary hook block and weight, cab, controls, and necessary accessories.

3.3.2.1 Superstructure. The superstructure shall contain the operator's compartment, be mounted on the carrier to insure full 360-degree working range and be designed to withstand the forces caused by lifting, swinging, clamshelling, pile driving and traveling with maximum safe loads. The superstructure shall provide stable retention of the boom in all positions and, with its base, shall rotate on ball thrust or roller bearings of sufficient number, size and capacity to support working loads. A means shall be provided to positively lock the superstructure in the travel position and prevent the superstructure from revolving. The travel position lock shall be capable of being engaged and disengaged by a seated operator.

3.3.2.2 Boom. The boom shall be of the sectional telescoping type, consisting of a base section and sliding section(s) to reach a boom working radius of not less than 73 feet, and having a retracted working radius of not more than 33 feet in the horizontal position. The boom sliding sections may be hydraulically synchronized for extensions and retractions at equal rates and lengths by a single operator's control lever or each extension section may operate by its own lever. The boom shall be capable of elevation from the horizontal to a vertical angle of not less than 70 degrees but not more than 76 degrees. All extensions, retractions, and elevations of the boom shall be accomplished by hydraulic controls from the operator's cab without manual assist. The hydraulic cylinders shall be designed to withstand the normal rigors of all operations. A boom angle indicator shall be provided. The pointer shall indicate the angle of the horizontal plane and shall be clearly visible to the operator. The boom shall be marked in increments and angles which are consistant with the load charts of the crane so as to be clearly visible from the ground. The materials and design of the boom point shall be sufficient to withstand the normal rigors of, and perform, two-cable clamshell operations as well as that of normal lifting operations, pile driving operations and cargo handling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:30Z
Check the source to verify that this is the current version before use.

3.3.2.3 Hoists. The main and auxiliary drum hoists shall be equipped with not less than 5/8-inch diameter wire rope. The hoists shall be mounted to facilitate craning, pile driving and clamshelling operations. The hoists shall be actuated by hydraulic motor(s) controlled from the operator's station. The hoist assembly shall include not less than a motor, drum, controlled free fall mechanism, and self-locking gearing or brake mechanism.

3.3.2.4 Rope. Load hoist rope for the main hoisting drum shall be not less than 500 feet in length, shall be not less than 5/8-inch in diameter, and not less than 6 by 19 improved plow grade steel, uncoated, preformed, independent wire rope center. Load hoist rope for the auxiliary hoisting drum shall be of sufficient length to perform two-cable clamshell operations, not less than 5/8-inch in diameter, and not less than 6 by 19 improved plow grade steel, uncoated, preformed, independent wire rope center. All ropes shall have a safety factor of not less than 3.5.

3.3.2.5 Sheaves. All sheaves shall have a pitch diameter at least 18 times the rope diameter. Sheaves shall be adequately guarded to prevent the wire rope from leaving the sheave during all operations.

3.3.2.6 Hook block. The running block and hook shall have a rated capacity of not less than 30 tons, and shall have adequate weight, or a positive mechanical, hydraulically actuated linkage, to insure payout of the cable without load on the hook when the hook is in any position. The hook shall be a swivel type designed to handle at least four times the maximum safe load without permanent deformation, and shall include a safety latch on the hook. Means shall be provided to secure the hook while traveling. A 5-ton capacity overhaul ball, with swivel hook on ball bearings and a safety latch shall be provided.

3.3.2.7 Cab. The cab, mounted on the revolving superstructure, shall be fabricated from sheet metal and shall have sufficient windows and glazed doors to permit at least 270-degree vision for the driver or operator in normal position. All glass shall be safety type conforming to ANSI Standard Z26.1, held in place by rubber or metal channels for easy replacement. Windows shall be arranged for easy opening and removal when required. All cab doors, whether of the sliding or swinging type, shall be adequately restrained from accidently opening or closing when the crane is traveling or operating. All doors shall be provided with means for normally locking in the closed position. An adjustable and comfortable seat shall be provided in the cab, located for maximum unobstructed visibility of the operator. The cab shall be equipped with a diesel fuel heater, defroster, air or electric operated windshield wiper, and instrument panel with gages and indicators specified in 3.3.2.8. Electric or air horn, hand or foot operated, shall be provided. The cab shall be

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the currentversion before use.

provided with driving mirrors, each of which must not be smaller than 48 square inches.

3.3.2.8 Controls. All carrier, outrigger, hoist and crane controls, lockouts and safety indicators shall be accessible under all conditions of operation. All controls shall be clearly marked as to function. The minimum controls which are required are main winch lever with free fall mechanism, auxiliary winch lever with free fall mechanism, swing pedal or lever, a brake for the turntable and an accelerator which can be set to any engine speed without constant pressure. All levers and controls shall be arranged so as to best facilitate operations. The turntable brake shall not engage automatically when the swing lever or pedal is in the neutral position.

3.3.2.9 Overload indicating systems. A safe-load device shall be provided to monitor the load being lifted at all times at all radii and boom lengths. Visual and audible warning shall be provided to warn the operator when 90 percent of the safe load limit has been reached. The monitoring device shall be mounted in the cab within constant sight of the operator. The device shall be capable of being adjusted for various parts of line. The load sensing part of the device must be mounted in such a manner as to not interfere with clamshell operations.

3.3.3 Engine. The crane shall be equipped with a single Detroit Diesel Allison engine of the 53N or 71N Series. The engine and engine accessories Bill of Material shall be subject to the approval of the procuring activity. The engine horsepower, torque and speed characteristics shall be sufficient to meet the performance requirements specified herein. The crane manufacturer shall furnish the contracting officer with a copy of the engine manufacturer's certification that the engine supplied is approved for the crane required under this specification. The engine in the crane application shall be capable of starting and operating in ambient temperatures from -20° F to +125° F. The engine shall be capable of meeting the performance requirements using jet fuel conforming to MIL-T-5624, grade JP-5, as well as diesel fuel conforming to VV-F-800. The engine accessories and instruments shall be as follows:

(a) A protective relay to protect the charging system when the batteries are incorrectly connected or incorrect polarity is induced by slave jumper cables.

(b) An instrument panel complete with a lubricating oil pressure gage, a fuel oil pressure warning light or gage, a cooling liquid-temperature indicator, a battery charge and discharge rate indicator, an hourmeter, an air pressure gage, a transmission temperature gage and a transmission pressure gage.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

(c) A fuel tank with sufficient capacity for 8 hours normal operation.

(d) A 24-volt (V) negative ground electric cranking system with starting motor mounting flange conforming to type 3 of SAE J542. Minimum performance shall be 24-V heavy duty conforming to Figure 1 of SAE J544.

(e) Batteries, 6TN, in accordance with MS35000-3, of sufficient quantity to insure positive engine cranking at -20° F. Batteries shall be furnished charged and dry; electrolyte is not to be provided.

(f) A charging alternator with a capacity rating of not less than 60 amperes conforming to MIL-G-46795. Pulley design shall be in accordance with MS51064.

(g) A cooling-liquid high temperature safety device of the warning type.

(h) A lubricating oil safety device.

(i) A fuel oil level gage.

(j) An engine housing designed to facilitate the maintenance of engine.

(k) A slave receptacle in accordance with Drawing No. 11682345.

(l) An audible warning device to indicate low air pressure.

(m) A cold weather starting aid, Turner or equal, 20-ounce measured shot.

(n) A dry type air cleaner.

(o) An air compressor with a capacity rating compatible to the system.

3.3.4 Transmission. The crane shall be equipped with a torque converter, not less than 3 speed power shift transmission, with retarder, having at least a high-low range permitting a minimum of six forward and two reverse speeds. Gearing shall allow a maximum speed in the lowest forward and reverse gear of not more than 2.5 mi/h and in the highest gear forward of at least 20.0 mi/h with the engine operating at engine governed speed. The crane manufacturer shall furnish the contracting officer with a copy of the transmission manufacturers certification that the transmission supplied is approved for the crane required under this specification. The transmission shall be capable of operating using OE-10, 10-weight oil conforming to MIL-L-2104.

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:30Z
Check the source to verify that this is the currentversion before use.

3.3.5 Brakes. The crane shall be provided with air over hydraulic, or full air powered, foot controlled, service brakes applied to four wheels. The brakes shall be capable of bringing the crane to a complete safe stop within a 32-foot distance at gross vehicle weight on a level paved surface from 15 mi/h. A parking brake capable of holding the crane at gross vehicle weight on a slope of not less than 30 percent grade without slippage shall be provided. A spring loaded safety feature mechanism shall be provided for the application of the brakes in the event of brake system failure. A means shall be provided to release the brakes, in the event of engine failure, for towing.

3.3.6 Tires. Tires shall be of the tube or tubeless, high flotation, earthmoving, type, 26.5 by 25, 26-ply rating, in accordance with Drawing No. 13220E5121. A tire inflation system tapped from the air pressure system shall be provided with a minimum of 100 pounds-force per square inch (lb_f/in^2) of 60 pounds.

3.3.7 Axles. The axles shall be heavy duty, wheel hub planetary type equipped with twin steering cylinders. The front axle shall be of a rigid mount. The rear axle shall be equipped with a no-spin differential and provide not less than 10 inches of oscillation at the wheel tread. The rear wheel oscillation shall be automatically locked out when the upper works revolve 5 degrees away from the longitudinal axis of the crane. The operator's cab shall be equipped with a manual override switch to lock out rear wheel oscillation. The axles must be a minimum of 9 feet wide and capable of taking the 26.5 by 25 or larger tires.

3.3.8 Hydraulic system. The hydraulic system shall include pump(s), hydraulic rams, rods, full-flow filter, reservoir, pressure-relief valve, and all necessary lines, lockouts, restrictors, and control valves to insure positive control of boom hoist and rope hoist in all operations or loss of hydraulic power due to ruptured hoses. Hydraulic line circuit and filtration shall be in accordance with SAE J931 with a 25 micron or finer filter. The pump(s) shall be driven by the crane engine and shall have sufficient capacity to operate all hydraulically powered components as specified herein. Means shall be provided in the hydraulic system for bleeding all air trapped in the system. The total capacity of the main hydraulic pump(s) shall be not less than 110 gallons per minute. All rods which will be exposed during operation shall have a hard chromium plating with a crack-free thickness sufficient to withstand a 30-hour salt water spray test. All high pressure hydraulic hoses and fittings shall be capable of withstanding a bursting test pressure of four times the working pressure, and a maximum operating pressure of at least two times the working pressure. High pressure hydraulic hoses shall have physical qualities equal to or conforming to MIL-H-13531, type I or II, class A, as applicable, and be rubber coated to resist salt water corrosion of the reinforcing metal within the hose. The hoses shall be provided in as few

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:30Z
Check the source to verify that this is the current version before use.

types and sizes as practical, with reusable type fittings. The hydraulic system shall be capable of operation on OE-10, 10-weight, oil conforming to MIL-L-2104.

3.3.9 Lights and reflectors. The following lights and reflectors shall be furnished and installed in accordance with DoT Motor Carrier Safety Regulations, and shall be powered by a 24-V electrical system:

(a) Two weatherproof headlights mounted on carrier.

(b) Taillights.

(c) Stoplights.

(d) Clearance lights.

(e) Turn signal light.

(f) Instrument panel light.

(g) Two weatherproof floodlights mounted on the upper works in a location to illuminate the hook ground level working area.

(h) Emergency four-way flashing lights.

3.3.10 Outriggers. Four hydraulically operated outriggers, capable of elevating the crane 5 inches above ground level, shall be positioned at each corner of the crane, and shall be capable of independent operation from the cab. The outrigger legs shall not collapse due to loss of hydraulic pressure. Outriggers in the stowed position, ready for travel, shall not exceed maximum allowable width. The pads must be of sufficient size and strength to support the crane and its maximum load listing capability without the loss of crane stability. The outrigger pads may be detachable if required to give the crane a minimum angle of approach and departure of 21 degrees. If the outrigger pads are detachable, brackets must be provided for carrying the pads on the crane; the brackets must not protrude or interfere with the crane's capability of being loaded or off-loaded from naval shipping and shall not exceed maximum allowable width or angle of approach and departure. Devices to accurately determine when the crane is level shall be installed in a position convenient to the outrigger controls.

3.3.11 Cargo bumper. The front of the crane carrier shall be provided with a wooden bumper. The bumper shall be 8 inches deep, 10 inches high and the length shall be the width of the crane. The bumper shall be positioned to function as a rest to lean the load against during carry

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:30Z
Check the source to verify that this is the current version before use.

operations. The ends of the bumper shall be provided with a bracket to contain the load within the bumper length. The bracket shall be capable of being folded away or quickly detached when not in use.

3.3.12 Attachments. The crane shall be equipped to operate with the following attachments:

(a) Pile driver leads and catwalk conforming to MIL-L-11025.

(b) Diesel pile driver conforming to MIL-H-21103, size D.

(c) 3/4-cubic yard conventional two-cable operated clamshell bucket.

3.3.13 Accessories. The crane shall be supplied with the following accessories:

(a) Pile driver lead adapters conforming to Figure 1; they shall be adaptable to the crane boom point.

(b) Catwalk connection clips conforming to Figure 2 shall be mounted below the boom on the rotating superstructure frame and shall be compatible with MIL-L-11025.

(c) Tagline assembly, boom mounted, for 3/4-cubic yard two-cable operated clamshell bucket.

(d) Four expeditionary can racks suitable for carrying 5-gallon capacity military cans conforming to MIL-C-1283 shall be mounted so as not to interfere with normal crane operation nor require removal for normal maintenance of the crane.

(e) A rifle mounting kit conforming to Drawing No. 8712407 shall be mounted in a location accessible to the operator. The location shall be approved by the contracting officer.

3.3.14 Special tools and toolbox. A closed compartment for a toolbox shall be provided to carry those tools and accessories required to operate the crane. The toolbox compartment shall be made of steel not less than 0.0747 inch nominal thickness (U. S. standard gage No. 14). The toolbox shall have a hinged lid and a latch of a type which will keep the lid closed when the toolbox is subjected to vibration. The toolbox shall be securely fastened to the unit in a protected and accessible location, and shall be above the 60-inch fording level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:30Z
Check the source to verify that this is the current version before use.

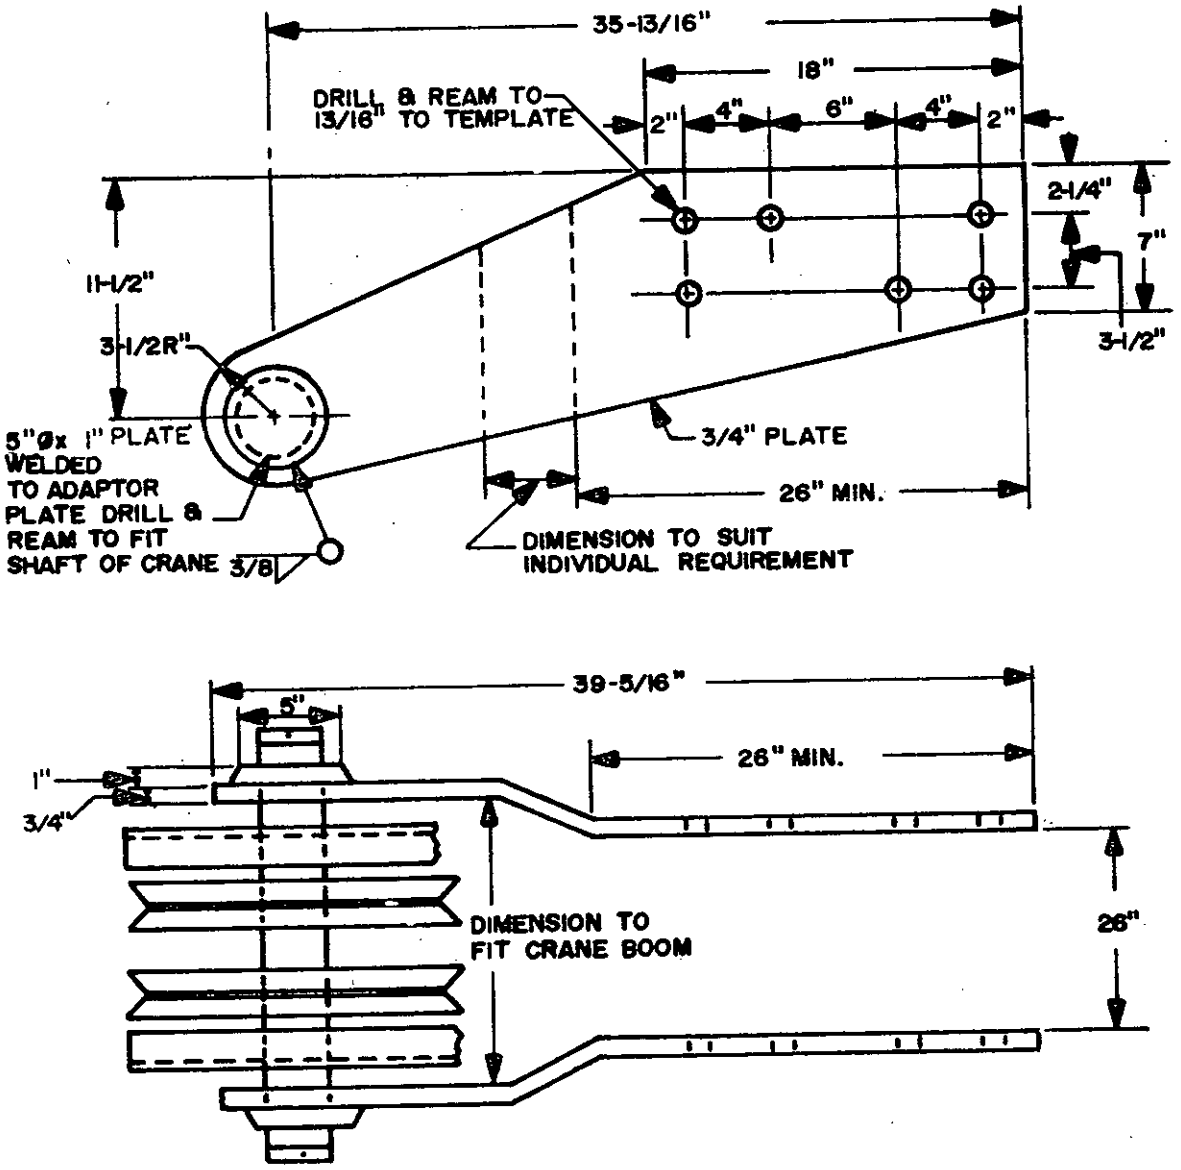


Figure 1. Pile driver lead adapter

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

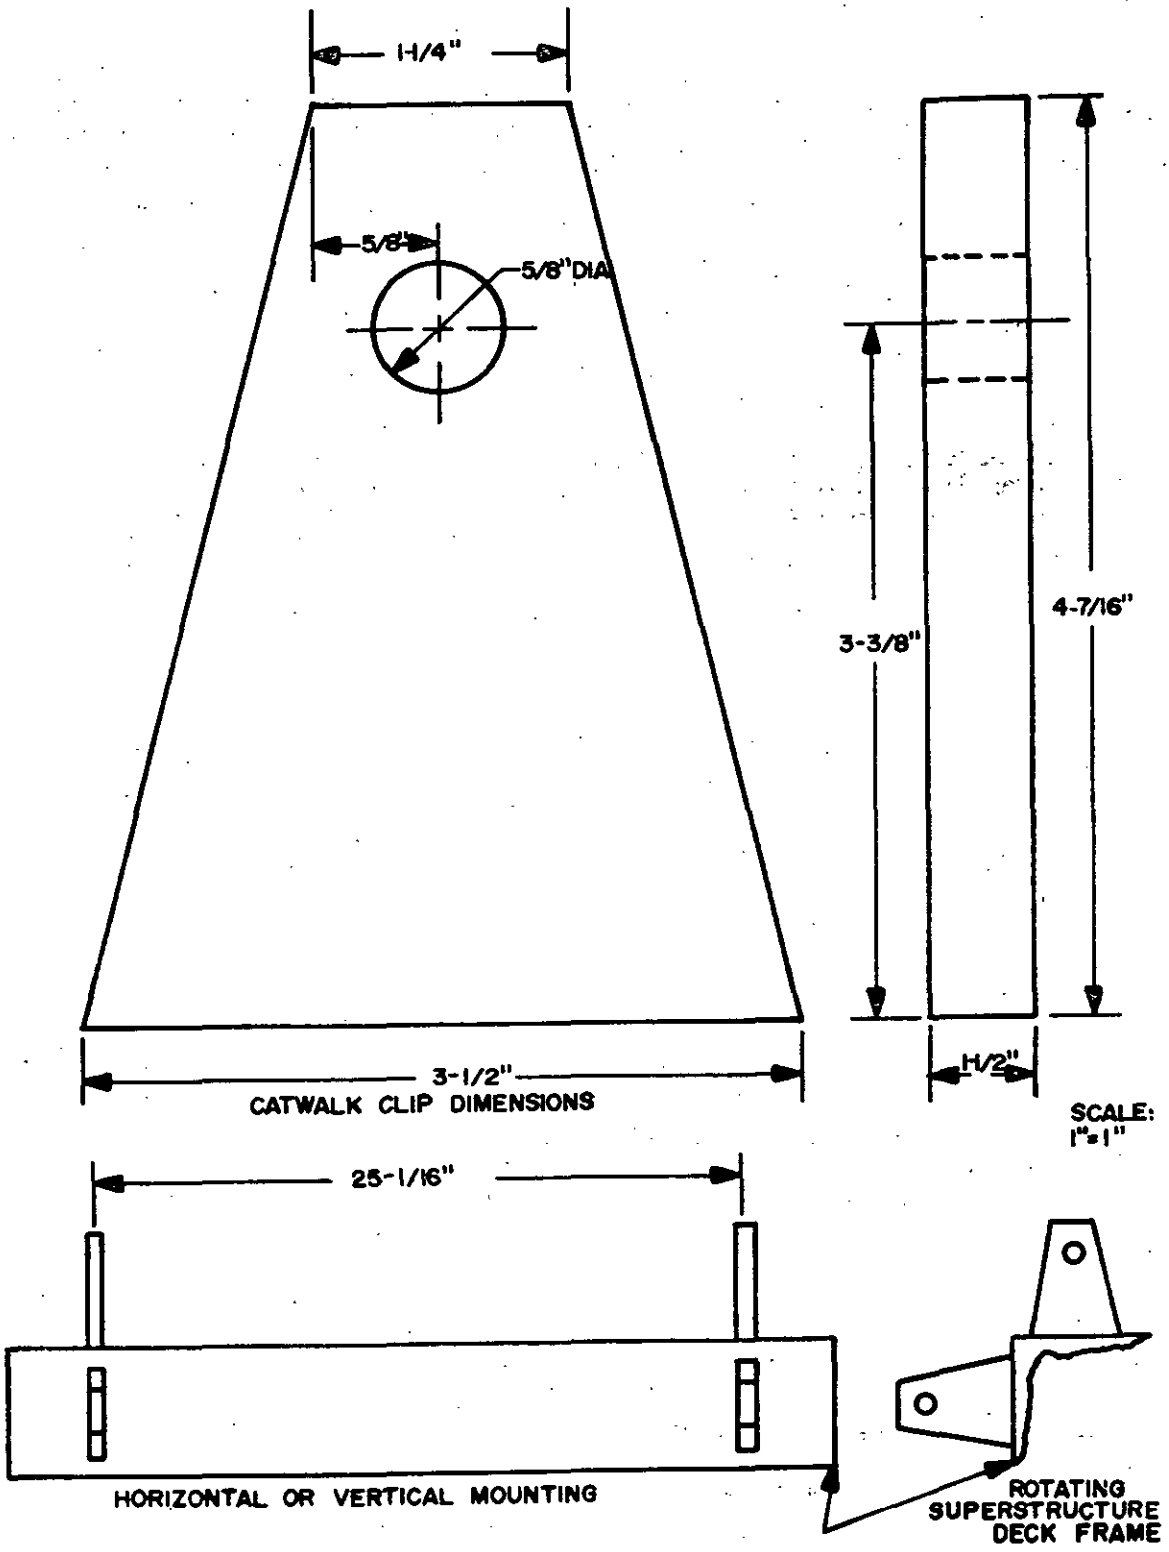


Figure 2. Catwalk connection clips

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:30Z
Check the source to verify that this is the current version before use.

3.3.15 Towing attachments. Towing attachments shall be provided on the front and rear of the crane. The towing attachments shall not reduce the angle of approach and departure of the crane and shall be capable of withstanding the rigors of retrieving operations from mud or water by a winch and cable in the event of engine failure.

3.3.16 Lifting and tiedown attachments. The crane shall be equipped with lifting and tiedown attachments conforming to MIL-STD-209, type II. Attachments shall be indicated by a transportation plate conforming to MIL-P-514.

3.3.17 Lubrication. Lubrication means shall be provided for all moving parts requiring lubrication. Lubrication fittings shall be in accordance with SAE J534. Pressure lubrication fittings shall not be used where normal lubricating pressure may damage grease seals or other parts. The crane shall be lubricated prior to delivery with standard military lubricants conforming to MIL-G-10924. The crane shall be conspicuously tagged to identify the lubricants and their temperature range.

3.3.18 Water fording capability. The crane shall have the inherent capability of fording fresh water to a depth of 60 inches without damage to crane or carrier. When tested as specified in 4.7.12, the amount of water in the engine, clutch, transmission, torque convertor or axle housings shall be not more than 1 percent of the total oil content.

3.3.19 Safety. All rotating or reciprocating parts and all parts subject to high operational temperatures, which are of such nature, or are so located, as to be or become a hazard to the operating or attending personnel, shall be substantially guarded, or insulated, to the extent necessary to eliminate the hazard. The principal platform walking surfaces shall be of an antiskid type. Ladders, steps, and handholds shall be provided in such quantity and of such size on the sides of the crane cab or superstructure that entrance thereto and exit therefrom may be unhampered and nonhazardous.

3.4 Construction. Where no specific construction requirements are specified herein, the manufacturer's best commercial practice shall apply. All parts, components, and attachments shall be identical for each crane furnished under any specific contract. No deviations will be accepted without prior written approval of the contracting officer.

3.4.1 Steel fabrication. Steel used in the fabrication of the crane shall be free from kinks and sharp bends. The straightening of material shall be done by methods which will not cause injury to the metal. Shearing and chipping shall be done neatly and accurately. All bends of a major character shall be made with controlled means in order to insure uniformity of size and shape.

Source: https://assist.dla.mil -- Downloaded: 20261020T22:30Z
Check the source to verify that this is the current version before use.

3.4.2 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers and lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.4.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.4.4 Welding. Welding shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or foreign matter. Spot, tack, or intermittent welds for strength shall not be permitted. Weld penetration shall be such as to provide transference of maximum design stress through the base metal juncture. Fillet welds shall be provided when necessary to reduce stress concentration.

3.4.5 Castings. Castings shall be sound and free from patching, misplaced coring, warping, or other defects which might render the casting unsound for use.

3.5 Maintainability. The crane design, together with component and accessory location and installation, shall permit ready accessibility to all items requiring periodic maintenance service in the field. Maintenance shall be accomplished with the use of conventional general purpose tools associated with equipment of this nature. The replacement and adjustment of components and accessories shall be accomplished with minimum drainage requirements and minimum disturbance to other elements of the crane.

3.6 Transportability. The crane shall be designed and constructed so that it can be transported by rail, highway, and water transport. The crane shall be capable of being loaded and unloaded from an LST (see Figure 3) without disassembly.

3.7 Performance. The crane shall be capable of performing heavy-duty load lifting on sandy beaches, shallow water beaches, or in hilly rough terrain areas and of operating a clamshell and a pile driver within the limitations of safe load capacities specified herein. The crane shall have a designed capability of operating with a conventional 3/4-cubic yard two-cable clamshell bucket. The crane shall be capable of independently and simultaneously lifting and traveling with a sweep of 360 degrees continuous rotation, and shall have a maximum rotational speed rate of not

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the currentversion before use.

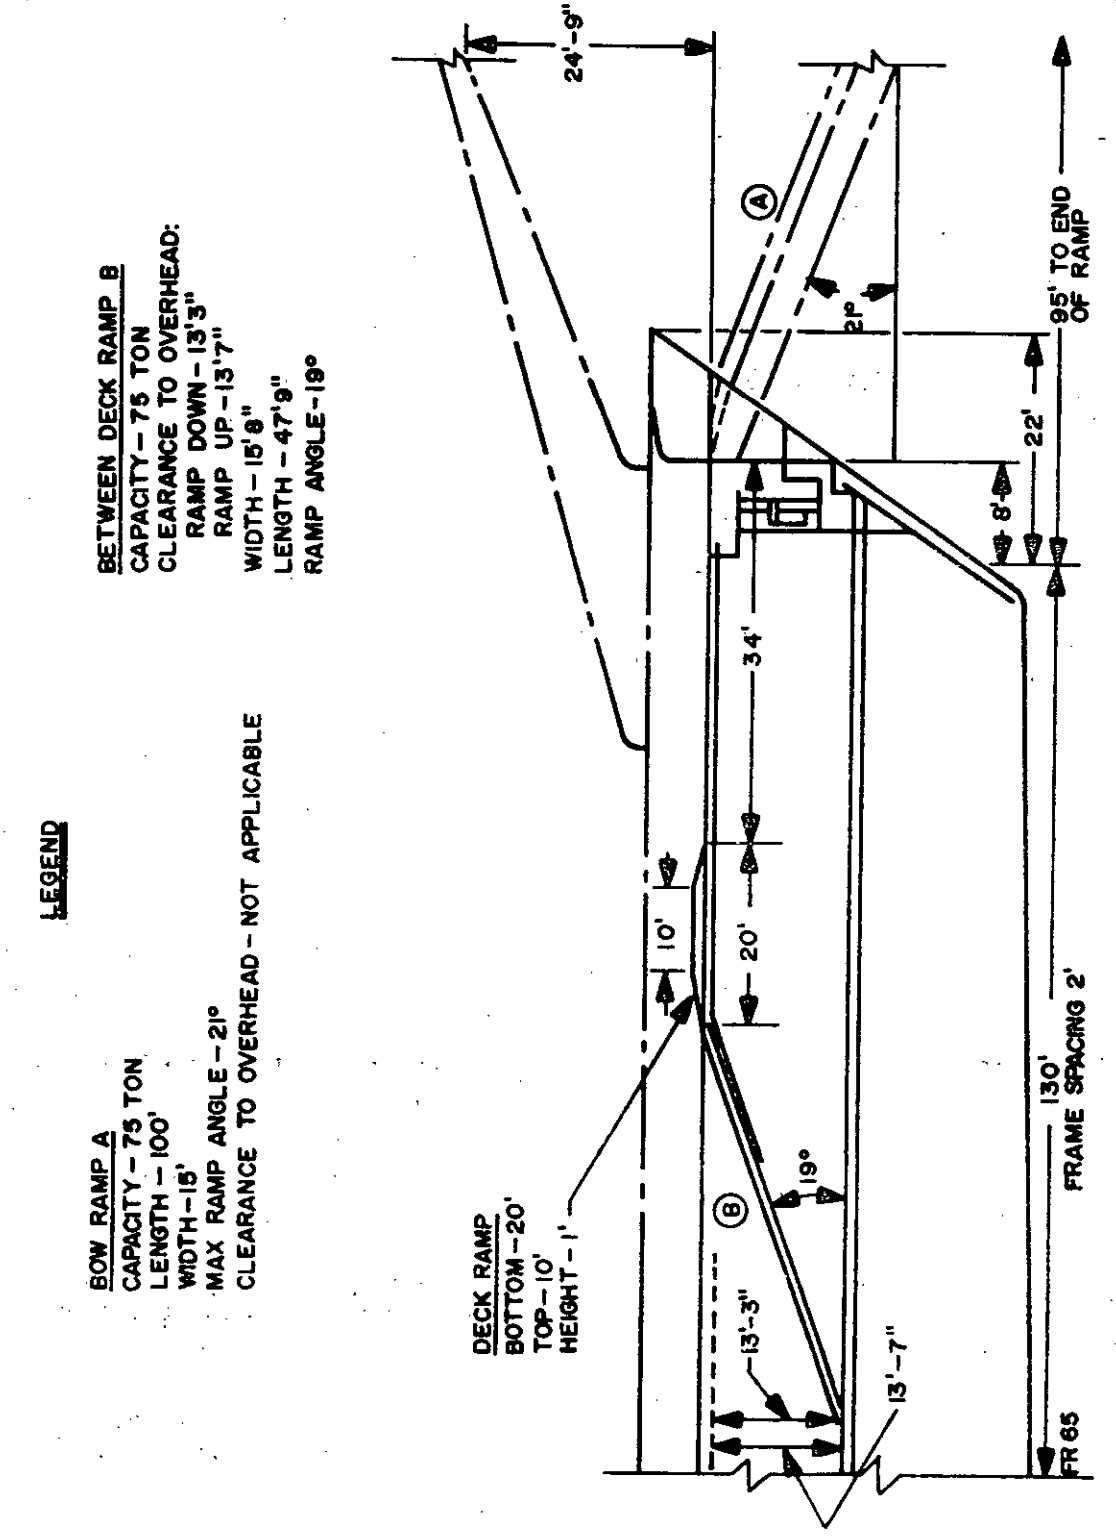


Figure 3. Profile, LST 1179 class bow

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

less than 2.5 revolutions per minute. The crane with boom, and with all the required accessories, shall be capable of the following:

(a) Without load:

(1) Attaining and maintaining travel spped of not less than 20 mi/h on level paved roads.

(2) Travel up not less than a 30 percent slope on hard-packed surfaces at not less than 2 mi/h without engine stall.

(3) Negotiating 15 percent side slopes.

(b) With load:

(1) Traveling at reduced speeds on unimproved roads, rough terrain, and beach areas.

(2) Travel up 15 percent slopes composed of sandy or loose soil, with a retracted boom positioned over the front with 33,600 pounds at 12 foot radius, 27,600 pounds at 15-foot radius, and 18,800 pounds at a 20-foot radius, at engine governed speed.

The crane with boom shall have the safe load capacities of not less than those specified in Table I when lifting in the least stable direction, and be capable of lift and swing with the loads listed in Table I. The safe load shall not exceed 85 percent of the tipping load. The crane shall operate in ambient temperatures between -20° F to +125° F.

Table I. Safe Load Capacity (Pounds)

Boom Working Radius (Ft)	With Outriggers 360° Rotation	Without Outriggers 360° Rotation
12	60,000	28,300
15	50,000	17,800
20	36,500	11,500
25	28,000	7,500
30	19,000	5,000
35	16,000	3,700
40	13,000	2,525
45	10,500	1,550
50	9,000	---
60	6,200	---
70	4,200	---

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

3.7.1 Stability. With lubricating and cooling systems full, fuel tanks at least half full, crane resting on firm, level, and uniform supporting surface, with outriggers unsupported, and the boom fully retracted and placed at maximum boom angle, without hook load, the weight distribution of the gross vehicle weight on the front axle shall be not more than 60 percent, on the rear axle not less than 40 percent, and shall conform to the following additional requirements:

(a) With the axis of the revolving superstructure at 90 degrees to the axis of the carrier, the total load on all wheels on the side under the boom shall be at least 15 percent of the working weight of the crane and carrier.

(b) With the axis of the revolving superstructure on the axis of the carrier with boom forward, the total load on all front wheels shall be at least 15 percent of the working weight of the crane and carrier.

3.7.2 Power-load lowering. Power load lowering by hydraulic control, with a hydraulic holding device, shall be provided for the main and auxiliary hoisting drums to facilitate controlled load lowering or lifting at any boom lengths or elevation. The power down on the main hoisting drum shall have sufficient capacity to hold a load of not less than 15,000 pounds without slipping on a single part line. The power load lowering means shall be provided with a positive control.

3.7.3 Hoist and rotation. The main hoisting drum for the crane shall be capable of developing a bare drum pull of not less than 3,760,000 foot-pounds per minute at a line speed of not less than 240 feet per minute with a single cable of not less than 5/8 inch in diameter. Available line pull or speed shall be rated in accordance with PCSA Standard No. 2, section 4. Pitch diameter of the drum shall be not less than 18 times the diameter of the rope used thereon. The auxiliary hoist drum shall be capable of developing a bare drum pull to withstand the rigors of operation with a 5-ton overhaul ball, pile driver and clamshell, and line speed compatible for clamshell operations, using a single cable of not less than 5/8-inch diameter. Controlled free falling feature shall be provided for the main hoisting drum and the auxiliary drum. The power transmission system used to rotate the superstructure shall be a hydraulic mechanical arrangement with a continuous rotation of 360 degrees. Swing speed within this range shall be smooth and constant, and adequate control shall be provided to insure smooth starting and stopping. A swing lock or brake, capable of locking the superstructure in any desired position, shall be provided. The swing lock or brake controls shall be located within easy reach of the operator while he is seated.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:30Z
Check the source to verify that this is the current version before use.

3.8 Electromagnetic interference supression. The crane shall conform to the electromagnetic characteristic requirements of MIL-STD-461 for class IIIC equipment.

3.9 Dimensions. The maximum overall width of the crane, including tire bulge, shall not exceed 11 feet. The front and rear wheel tread width of the crane shall be not less than 88 inches. The overall height, with crane boom in travel position, shall be not more than 13 feet with a maximum overall length of not more than 45 feet.

3.10 Weight. The operating weight of the crane shall be not less than 67,000 pounds nor more than 77,500 pounds.

3.11 Cleaning, treatment, and painting. Surfaces normally painted in good commercial practice shall be cleaned, treated, and painted in accordance with MIL-T-704, table II, type A, except the finish coat shall be in accordance with TT-E-485. Color of the finish coat shall conform to Marine Corps green, No. 23 (see 6.3).

3.12 Marking. The entire crane shall be free of all attached, appended or painted markings, decalcomania, name plates, and data plates except as specified herein.

3.12.1 Identification marking plate. The crane shall be marked in accordance with MIL-STD-130. A U. S. Marine Corps name plate shall be permanently attached in a conspicuous location. The name plates will be furnished, upon request, by the Commandant of the Marine Corps (Code LMO), Headquarters U. S. Marine Corps, Washington, D. C. 20380. Data applicable to blank spaces 1, 3, 11, and 12 on the name plate will be furnished by the procuring activity. The contractor shall be required to imprint the data in all blank spaces.

3.12.2 Registration data. The registration number assigned to each crane by the contracting officer shall be painted on the crane by the contractor in yellow enamel conforming to TT-E-529 or applied by use of decals conforming to MIL-M-43719. Color shall match No. 23538 of FED-STD-595. Registration numbers shall be applied on two sides and the rear in minimum 3-inch characters in accordance with MIL-STD-642, except the national symbol shall not be applied.

3.12.3 Instruction plates. The crane shall be equipped with instruction plates suitably located, describing any special or important procedure to be followed in starting, operating, shutdown, and servicing the crane. Plates shall be of a durable material and shall be securely affixed thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:30Z
Check the source to verify that this is the current version before use.

3.12.4 Stenciling. The gross weight of each crane shall be stenciled on each side of the crane in such a manner as to be readily discernible to dock and military personnel. The prescribed tire pressure shall be stenciled on the carrier fenders by block or stencil-type letters not more than 1 inch high. Yellow enamel conforming to TT-E-529 or decals conforming to MIL-M-43719 shall be utilized. Color shall match color No. 23538 of FED-STD-595.

3.12.5 Safe load capacities chart. A permanent chart indicating all the safe load capacities on each boom reach and radii at 360 degrees rotation, with and without outriggers, shall be posted in the crane cab in easy view of the operator, when he is in normal operating position.

3.13 Government-furnished property. The rifle holder specified in 3.3.13 shall be furnished by the Government.

3.14 Government-loaned property. The diesel pile driver, 55 feet of pile driving leads and catwalk required for test in 4.7.14 shall be loaned by the Government.

3.15 Workmanship. All parts, components, and assemblies of the crane, including castings, forgings, molded parts, stampings, bearings, seals, machined surfaces, and welded parts, shall be clean and free from sand, dirt, fins, pits, sprues, scale, flux, and other harmful extraneous material. External surfaces shall be free of burrs, sharp edges, and corners except when sharp edges or corners are required.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article (see 4.3).

(b) Production (see 4.4)

(c) Preparation for delivery (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

4.3 First article. First article inspection shall be performed on the first production item. This inspection shall include the examination in 4.6 and the tests in 4.7. The first article may be a standard production item from the supplier's current inventory provided the crane meets the requirements of this specification and is representative of the design, construction, and manufacturing technique applicable to the remaining cranes to be furnished under the contract.

4.4 Production. Each crane produced in fulfillment of a Government contract or order shall be completely assembled, adjusted, lubricated, or otherwise serviced for operation. The engine shall be started and subjected to a warm-up period as recommended by the manufacturer. Each crane shall be subjected to examination in 4.6. The crane shall be given a run-in test and all controls operated a sufficient number of times to ascertain that the components and mechanisms actuated by the controls operate promptly, fully, and without restriction or malfunction. Tests for the maximum capacity load listed in Table I shall be conducted. The overload indicating system shall be tested.

4.5 Preparation for delivery inspection. The preservation, packaging, packing, and marking of the cranes shall be inspected to verify conformance to the requirements of Section 5.

4.6 Examination. Each crane shall be examined for compliance with the requirements specified in Section 3 of this specification. Any redesign or modification of the supplier's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any requirements specified herein or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.7 Tests. Failure of the crane to pass any of the following tests shall be the basis for rejection.

4.7.1 Crane safe load capacity test. The crane shall be completely serviced and subjected to the manufacturer's recommended break-in. The safe load capacity test shall be performed on a level, paved surface by the use of calibrated weights. The crane shall lift the safe loads specified in Table I in the least stable direction. The crane, with safe load raised, shall be rotated 360 degrees clockwise and counterclockwise to determine conformance to 3.7. Actual tipping loads, where tipping load is the controlling factor, for each of the load conditions shall be determined in accordance with SAE J765. Eighty-five percent of each determined tipping load shall be compared with applicable safe load. The crane shall lift the loads at the applicable radii specified and then travel to

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:30Z
Check the source to verify that this is the current version before use.

determine conformance to 3.7(b)(2). Rated loads less than those specified herein and in Table I shall constitute failure of this test.

4.7.2 Speed tests. Speed tests shall be taken over a not more than 1-percent grade on a paved road. Travel shall be in both uphill and downhill directions. Time shall be recorded with a stop watch accurate to 1 second. The average speed shall be recorded for the unit. Maximum average speed not less than that specified in 3.7 when calculated by the following formula shall be attained:

$$V = \frac{0.682 \times D}{T}$$

Where: V = speed in mi/h

D = distance in feet

T = time in seconds

A fifth wheel type recorder may be used. Nonconformance to 3.7 shall constitute failure of this test.

4.7.3 Gradeability. The crane unit shall be tested for gradeability in compliance with 3.7. The crane, without load and with mounted attachments, shall negotiate a 30-percent slope on hard packed surface without engine stall. Inability of the crane to negotiate the slope, permanent deformation, or to complete the test shall constitute failure of this test.

4.7.4 Road test. The crane shall be given a road test at engine governed speed for a distance of not less than 35 miles, as follows:

(a) Travel 25 miles over paved roads without load at not less than 18 mi/h.

(b) Travel 9 miles over uneven roads with rough terrain containing 15 percent up slopes at not less than 3 mi/h without load.

(c) Travel 1 mile over unpaved surface composed of sandy or loose soil, or both, containing 15 percent up slopes, with a retracted boom positioned over the front with the loads specified in 3.7.

Failure of the crane to accomplish any part of this test shall constitute failure of this test.

4.7.5 Hydraulic hose test. Hydraulic hoses and fittings shall be bench tested to determine conformance to 3.3.8, except that certification by the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:30Z
Check the source to verify that this is the current version before use.

manufacturer, or certified copies of test reports of tests on identical items previously tested for identical pressures may be accepted.

4.7.6 Service brake test. Service brakes of the crane shall be tested for compliance with 3.3.5. On a ± 1 percent slope concrete roadway, the crane shall be accelerated at maximum rate to a speed of not less than 15 mi/h. The service brakes shall be applied bringing the crane to a complete halt to determine conformance to 3.3.5. Immediately after the crane comes to a halt, this test cycle shall be repeated for four additional cycles. The above test cycle shall be repeated five additional times traveling in the opposite direction of the start of the test. All shoes, drums, and other brake components where there is indication of damage shall be disassembled and examined. Evidence of damage that could result in unsafe operating conditions shall constitute failure of this test.

4.7.7 Parking brake test. The parking brake shall be tested for compliance with 3.3.5.

4.7.8 Power load lowering test. General inspection of the power-down system shall be made for adequate lubrication, ease of operation of controls, safety precautions, and for good manufacturing practices. The power load lowering system shall be tested as follows to determine conformance to 3.7.

(a) With the crane equipped with a boom of a length specified in 3.3, and with outriggers set, position the revolving superstructure in the most stable craning position and assemble a single line load equal to the maximum rated load divided by the recommended number of parts of hoist line reeving.

(b) Position the boom angle for the minimum working radius.

(c) Hoist the load 20 feet ±3 inches, above ground level, or until interference with the crane boom is obvious.

(d) Prepare the crane for power-down operation on the load line.

(e) Operate the power load lowering system in accordance with manufacturer's instructions, and lower the load under power. Vary the speed of the load.

(f) When the load reaches the ground, immediately repeat operations (c), (d), and (e). These operations shall be repeated until 20 cycles have been completed. Evidence of damage or malfunction shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

4.7.9 Crane hook test. The crane hook shall be given a wet or dry ferromagnetic particle test to determine surface or subsurface cracks or discontinuities. Certification by the manufacturer, or certified copies of test reports of tests on identical items previously tested may be accepted.

4.7.10 Travel control and turning circle test. To demonstrate workability of the travel controls (see 3.3.2.8), the crane shall be operated forward and backward in two figure 8 patterns with maximum right and maximum left turns. The crane shall negotiate a turning circle in compliance with 3.3. Inability to turn within a 25-foot turning radius shall constitute failure of this test.

4.7.11 Overload indicator test. The overload indicating system shall be tested to determine conformance to 3.7. When other tests are conducted and test loads exceed the rated safe load capacities specified herein, the safe load control device shall be either by-passed or disconnected. Failure to meet the requirements of 3.3.2.9, or malfunction shall constitute failure of this test.

4.7.12 Water fording capability tests. Water fording capabilities in compliance with 3.3.18 shall be ascertained in accordance with the following and Table II:

(a) Bring crane to operating temperature, and sample oil from the engine and all drive compartments for control purposes.

(b) Operate a minimum of 2 hours in 60 inches of water; immediately thereafter operate onshore in all gears for 2 hours. The service brake test in 4.7.6 above shall be run at the beginning of each 2 hour land test.

(c) Sample oil from engine and all drive compartments.

(d) Repeat b and c above four additional times for a total of 20 hours, except as follows:

(1) On succeeding tests, the crane engine shall be started and stopped a minimum of four times in 60-inch deep water.

(2) Final (fifth) fording shall consist of 3 hours in the water and 1 hour onshore.

(3) Oil samples shall be taken during the first, second, and fifth tests for analysis of the allowable water content as specified in 3.3.18.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

(e) Check running gear (wheel brakes) for any deficiencies which could cause unsafe operation. Inability to start the engine in the water, water in excess of allowable content in the oil or inability of the crane to complete the test shall constitute failure of this test.

(f) Note and report all deficiencies.

Table II - Water Fording Capabilities

Test	Water	Shore	Oil Sample	Start/Stop
1	2 hr	2 hr	Yes	
2	2 hr	2 hr	Yes	4 times
3	2 hr	2 hr	No	4 times
4	2 hr	2 hr	No	4 times
5	3 hr	1 hr	Yes	4 times

4.7.13 Clamshell operations. The crane, rigged with a contractor furnished conventional 3/4-cubic yard, two-line, cable operated, clamshell bucket, shall perform maximum capacity clamshell operations for a period of 20 hours in undisturbed heavy clay soil, and 20 hours of operation from a stockpile. Any damage or distortion to the crane, overheating of the hydraulic system or failure of any component or inability to operate with clamshell bucket shall constitute failure of this test.

4.7.14 Pile driving operations. The crane shall be rigged with Government-loaned diesel pile driver, 55 feet of pile driving leads, and catwalk. The crane shall be connected to the pile driving leads by the required pile driver lead adapters and to the catwalk at the catwalk connection clips. With the pile driving leads raised to the operating position, rotate the upper structure 90 degrees to the right and left of the forward center line, and travel over a graded unpaved surface for 1 mile, make a 180-degree turn using two-wheel steer and a 190-degree turn with four-wheel steer. The crane shall drive two contractor furnished 30-foot piles to their full length, or to refusal, into soft, medium, or hard packed soil as available in the test area. Any damage or distortion to the crane or failure of any operation shall constitute failure of this test.

4.7.15 Test for electromagnetic interference characteristics. The crane shall be tested in accordance with MIL-STD-462 for Class III equipment. Inability to pass the test shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the current version before use.

4.7.16 Lifting and tiedown attachment tests. The lifting and tiedown attachments shall be tested to determine conformance to MIL-STD-209 for class 1 and 3 slinging eyes or provisions, and class 2 and 3 tiedown eyes or provisions for working loads excluding air transport. Breakage or deformation of any component shall constitute failure of this test.

4.7.17 Towing attachment(s) test. The crane shall be placed in water at a depth of 60 inches with the engine shut off. A cable shall be attached to the towing attachment(s), and the crane shall be pulled from the water without use of its own power. This test shall be performed on both front and rear towing attachments. Breakage, distortion or deformation of the towing attachments or crane shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. The preservation and packaging shall be level A or C, as specified (see 6.2.1).

5.1.1 Level A. The complete crane shall be preserved and packaged in accordance with Level A of MIL-C-3580.

5.1.2 Level C. The complete crane shall be preserved and packaged in accordance with the supplier's standard practice.

5.2 Packing. The packing shall be level A, B, or C, as specified (see 6.2.1).

5.2.1 Level A. The complete crane shall be packed in accordance with level A of MIL-C-3580.

5.2.2 Level C. The complete crane shall be packed in a manner which will insure arrival at destination in satisfactory condition and which will be acceptable to the carrier at lowest rates. Packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. The crane and attachments, interior packages, and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. This crane is intended for the following uses:

(a) Bridge erection.

(b) Cargo and material handling in shore party operations.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:30Z
Check the source to verify that this is the currentversion before use.

(c) Container handling in amphibious operations.

(d) Shore party operations on shallow beaches, in up to 60 inches of water, and on sandy beaches.

(e) Engineering crane:

(1) Two-cable clamshell operations.

(2) Diesel pile driving operations.

(f) Construction work, such as erection of butler style building, etc.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.

(b) Level of preservation, packaging, and packing required (see 5.1 and 5.2).

6.2.2. Contract data requirements. Data conforming to Data Item Descriptions DI-E-4527, DI-M-4704 and DI-R-4803 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Color. Color chips for Marine Corps green No. 23 may be obtained from the Commandant of the Marine Corps (Code LMO-1), Headquarters U. S. Marine Corps, Washington, D. C. 20380.

6.4. First article. Any changes or deviations of production cranes from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the supplier of his obligation to furnish cranes conforming to this specification.

Preparing activity:
Navy - MC
Project No. 3810-N058

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:30Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

DOD-317

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commandant of the Marine Corps
(Code LME-2)
Headquarters U. S. Marine Corps
Washington, D. C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:30Z
Check the source to verify that this is the current version before use.