
MIL-B-82117/3E
25 July 1983
SUPERSEDING
MIL-B-82117/3D
25 January 1977

MILITARY SPECIFICATION SHEET

BATTERY, STORAGE: SILVER-ZINC, RECHARGEABLE: BB-606/U, 6 VDC (NOMINAL)

(E) This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

(E) The complete requirements for acquiring the battery described herein shall consist of this document and the latest issue of MIL-B-82117.

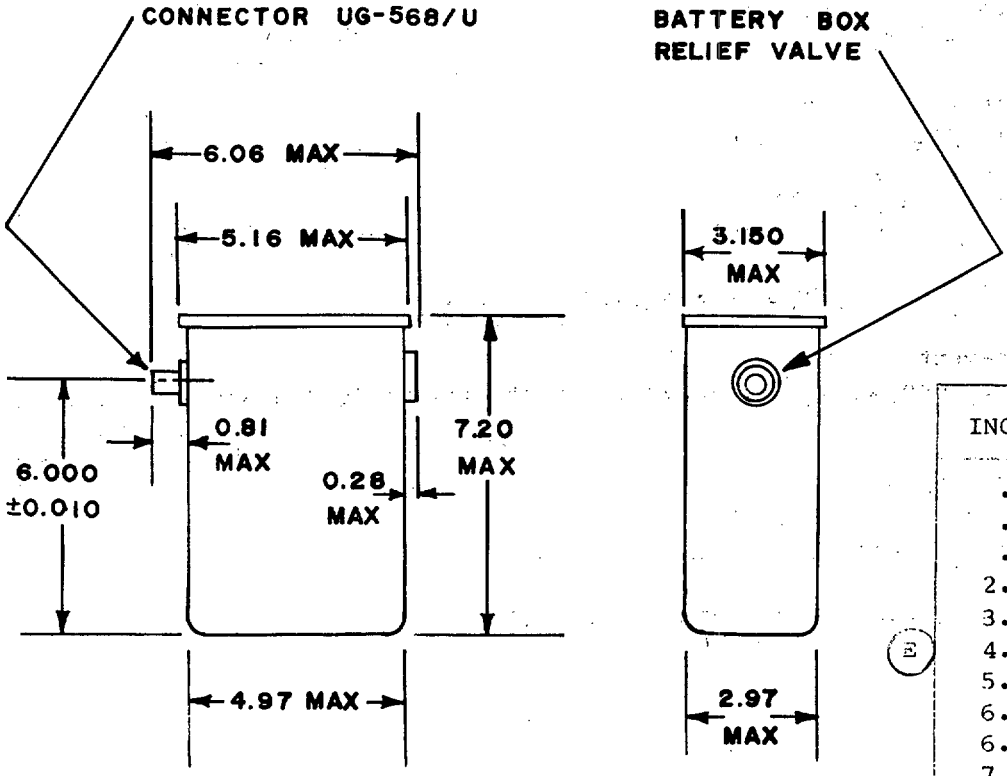

(E)

INCHES	MM
.01	.25
.28	7.11
.81	20.57
2.97	75.44
3.15	80.01
4.97	126.24
5.16	131.06
6.00	152.40
6.06	153.92
7.20	182.88

(E) denotes change

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

NOTES

(E) 1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

REQUIREMENTS

(E) Classification: Type II, Class 1
Weight (maximum filled): 6.0 pounds (2.72 kg)
Rated amphere-hour (Ah) capacity ($1C_1$): 25.0 Ah

Voltage -
(1) Maximum (OCV): 7.44 Volts (V)
(2) Nominal: 6.0 V
(3) Final:
Down to -10°C: 5.50 V
Below -10°C: 5.00 V

Operating temperature range -
(1) High: 60°C (+3°C, -0°C)
(2) Elevated: 38°C (±3°C)
(3) Standard: 22°C (±3°C)
(4) Low: -30°C (+0°C, -3°C)

Activation and filled discharge rate ($0.2C_1$): 20.0 Ah

(E) Charging requirements -
(1) Current regulated with automatic shutoff when battery voltage reaches 8 V.

Full capacity discharge -
(1) 5 sec. voltage (max) ($0.05C_1$): 7.30 V
(2) Discharge capacity ($0.2C_1$): 25.0 Ah

Extreme temperature discharge capacity ($0.2C_1$) -
(1) Low: 10 Ah
(2) High: 15 Ah

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

High rate discharge -
(1) 5 sec. voltage (min) ($1.0C_1$): 5.6 V
(2) Discharge capacity ($1.0C_1$): 25.0 Ah

Retention of charge -
(1) Elevated temperature storage discharge capacity (28 days): 13.5 Ah
(2) Standard temperature storage discharge capacity (28 days): 22.5 Ah

Cycle life test - Automatic cycling maximum time: 9.5 hours,
cutoff voltage: 8.0 $\pm$ 0.10 V

(1) Cycles 1-22: 15.6 Ah
(2) Cycles 23-25: 20.0 Ah
(3) Cycles 26-50: 15.6 Ah
(4) Cycle 51: 20.0 Ah
(5) Over 51 cycles: 15.0 Ah

(E) Drawings: Construction shall be in accordance with those portions of DL 5122-000-1299 applying to monoblocks except as specified under standard sample.

Standard sample: A standard sample may be provided under the terms of the contract. Where there is a conflict between DL 5122-000-1299 and the standard sample, the standard sample shall govern.

NSN: 6140-00-985-8277

Custodians:
Army - AT
Navy - MC

Review Activities:
Army - ER
DLA - GS

User Activities:
Navy - AS, CG
Air Force - 17

Preparing Activity:
Navy - MC

Project No. 6140-0565-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.