MILITARY SPECIFICATION

COMPRESSOR UNIT, 5 CFM, 3200 PSI, GASOLINE-ENGINE-DRIVEN, DIVING AIR

This specification is approved for use within the USA Belvoir Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a frame mounted gasoline-engine-driven, air compressor for producing air suitable for breathing. Only commercial vendors approved by the Naval Sea Systems Command (Code OOC), Alexandria, VA. are to provide the subject unit. The Authorized for Navy Use (ANU) equipment list, NAVSEA Instruction 10560.2 shall be used when procuring the unit and repair/replacement parts. No variation or substitute is permitted due to critical life support nature of the unit.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

BB-A-1034	- Air Compressed, for Breathing Purposes.

MILITARY

MIL-V-173	- Varnish, Moisture-and Fungus-Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-3600	- Compressors, Rotary, Power-Driven; and Compressors , Reciprocating, Power-Driven: Air and Gas (Except Oxygen and Refrigerant), . Packaging of.
MIL-G-3859	- Grease Guns, Hand Operated, Lever, Push and Screw Type.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-D-16791	- Detergent, General Purpose (Liquid Non-ionic).
MIL-L-17331	- Lubricating Oil, Steam Turbine and Gear, Moderate Service.
MIL-G-23827	- Grease, Aircraft and Instrument, Gear and Actuator Screw.

STANDARDS

FEDERAL

FED-STD-H28	- Screw Thread Standards for Federal Services.
FED-STD-101	- Test Procedures for Packaging Materials.

MILITARY

MIL-STD-130	- Identification Marking of U.S. Military Property.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-461	- Electromagnetic Emission and Susceptibility Requirements for the Control of Electro-magnetic Interference.
MIL-STD-767	- Cleaning Requirements for Special Purpose Equipment, Including Piping Systems.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1246	- Product Cleanliness Levels and Contamination Control Program.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:45Z
Check the source to verify that this is the current version before use.

MIL-STD-1330	Cleaning and Testing of Oxygen and Nitrogen Gas Piping.
MIL-STD-1359	Cleaning Methods and Procedures for Breathing Oxygen Equipment.
MIL-STD-1410	Methods for Selection of Industrial Engines for End Item Application.
MIL-STD-1472	Human Engineering Design Criteria for Military Systems, Equipment and Facilities.
MIL-STD-1474	Noise Limits for Army Materiel.
MIL-STD-1622	Cleaning of Shipboard Compressed Air Systems.
MS35844	Plug, Machine T'bread, Magnetic (Drain).
MS49006	Plug, Pipe, Magnetic-Headless, Aluminum, Iron or Steel.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

NAVFAC DM-39	- Hyperbaric Facilities Design Manual 39.
NAVSEA 0994-LP-001-9010	- U.S. Navy Diving Manual Volume I.
NAVMAT P-9290	- System Certification Procedures and Criteria Manual for Deep Submergence Systems.
NAVMEDCOMINST 6260.3	- Occupational Health Surveillance Manual.
Naval Experimental Diving Unit (NEDU)	- Air and oxygen Systems Cleaning Procedure for Organizational Level Preventative and Corrective Maintenance.

ENVIRONMENTAL PROTECTION AGENCY (EPA)

40 CFR, Part 85 - Control of Air Pollution From New Motor Vehicles and New Vehicle Engines.

(Application for copies should be addressed to the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

FOREST SERVICE

Forest Service Standard 5100-1.

(Application for copies should be addressed to the Forest Service, U.S. Department of Agriculture, P.O. Box 2417, Washington, DC 20013.)

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the non-Government documents which is current on the date of the solicitation.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Performance Test Code PTC-9 - Displacement Compressors, Vaccum Pumps and Blowers.

AMSE Boiler and Pressure Vessel Code, Section IX, Welding and Brazing Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN SOCIETY OF TESTING AND MATERIALS (ASTM)

F 307 - Gas, Perssurized, Sampling, Gas Analysis, Standard Method for.

(Application for copies should be addressed to the American Society of Testing and Materials, 1916 Race Steet, Philadelphia, PA 19103.).

AMERICAN WELDING SOCIETY, INC. (AWS)

D1.1 - Structural Welding Code - Steel.

(Application for copies should be addressed to the American Welding Society, Inc., 550 NW Lejune Road, P.O. Box 351040, Miami, FL 33135.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

J 534 - Lubrication Fittings.

(Application for copies should be addressed to Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT

Rule 442 - Usage of Solvents.

(Application for copies should be addressed to the South Coast Air Quality Management District, 9150 E. Flair Drive, El Monte, CA 91731.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

STATE OF CALIFORNIA AIR RESOURCES BOARD

Health and Safety Code.

(Application for copies should be addressed to California Air Resources Board, 1709 11th Street, Sacramento, CA 95814.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The compressor shall be portable, and shall consist of a compressing unit, driven by a gasoline engine, and shall produce not less than 5 cubic feet per minute of free air (cfm) at 3200 pounds per square inch gage (psig). The engine and compressing unit shall be mounted on a skid. The compressor shall be complete and self-contained, including a final air filter and all other accessories, and shall be enclosed by a frame. A flexible charging whip15 feet in length with standard commercial quick connect and disconnect SCUBA bottle fittings shall be included in the accessories in order to charge SCUBA flasks. The whip shall have a working pressure equivalent to the maximum discharge pressure rating of the compressor. The compressor shall weigh not more than 275 pounds dry and the dimensions shall not exceed 30 inches in height, 40 inches in length, and 25 inches in width. A water resistant tarpaulin shall be provided.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.4). Any changes or deviations of compressors from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish compressors conforming to this specification.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The compressor shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various fores of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the compressor may be exposed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889 and NAVFAC DM-39.

3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the compressor may be newly fabricated from recovered materials to the maximum extent practicable, provided the compressor produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the compressor.

3.4 Environmental conditions.

3.4.1 Operation at extreme temperatures. The compressor shall operate as specified herein under the following conditions.

3.4.1.1 Low temperatures. The compressor shall start and operate as specified herein for not less than 2 hours at rated capacity in any ambient temperature down to minus 25°F.

3.4.1.2 High temperatures. The compressor shall start and operate as specified herein at any ambient temperature up to plus 110°F for not less than 8 hours at rated capacity.

3.4.2 Rain. The compressor shall start and operate as specified herein after exposure to 1/2 hour of rainfall at a minimum rate of 3 inches per hour directed simultaneously at all four sides and top. The compressor shall operate as specified herein for 1/2 hour while the rain continues to fall at the minimum rate of 3 inches per hour.

3.5 Safety. All reciprocating, rotating or moving parts of the compressor shall be guarded when such parts are exposed to contact by personnel or otherwise create a hazard. All hot surfaces of the compressor unit, including exhaust pipes and other lines which may be subject to high temperatures, exposed to contact by personnel or which create a fire hazard, shall be fully guarded or insulated. Exhaust from the engine shall be directed so that it does not endanger personnel, and so that the possibility of exhaust entering into the compressor unit inlet is minimized. Electrical equipment, wires, and connectors shall be effectively guarded or insulated to protect all persons and objects from electrical shock hazard. Nonfunctional sharp edges, projecting points, and excessive length of fastening devices shall be avoided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

3.5.1 Noise level. The noise produced by the compressor shall conform with MIL-STD-1474 requirements, with the exception of MIL-STD-1474 5.2, 5.3, and 5.4 when tested in accordance with 4.5.2.9. The provision of MIL-STD-1474, 4.3 and 4.4 shall be provided if and only if MIL-STD-1474, 5.1.1.2 procedures have been pursued and documented to the satisfaction of the procuring activity and written permission to exceed the 85 dB(A) limit is obtained from the procuring activity. Hazard signs shall conform with MIL-STD-1474, 4.3, except the sign shall state "HEARING PROTECTION REQUIRED WITHIN (specify) FEET." The sign shall be readable at the distance indicated on the sign.

3.6 Reliability and maintainability.

3.6.1 Reliability. The specified Mean-Time-Between-Failure (MTBF) shall be 500 hours and the minimum-acceptable-value (MAV), for test purposes, shall be 200 hours when tested as specified in 4.5.2.14.

3.6.2 Maintainability. All major assemblies shall be accessible for servicing, repair, and replacement without the removal of other major assemblies. Covers and guards which must be removed for component adjustment or repair shall be equipped with quick-disconnect fasteners. All fasteners shall be of corrosion-resistant material or shall be treated to be corrosion resistant. All screw threads shall be in accordance with FED-STD-H28. Maximum use shall be made of interchangeable hardware and fasteners. Means for complete draining of lubricants, fuel and condensate traps shall be provided in an easily accessible location and shall be capable of draining to a container without splashing on any component. All maintenance, assembly, or disassembly operations shall be accomplished with common tools and special tools furnished with the compressor unit. The maintenance ratio (MR) shall not exceed 0.05 (see 6.3.2).

3.6.3 Ease of maintenance. Ease-of-maintenance provisions shall incorporate, to the maximum practicable extent, features insuring operating clearances and facilitating applicable maintenance and servicing operations at low temperatures by personnel wearing heavy mitten-type gloves and handicapped by bulky clothing and footgear. Devices and controls with threaded fastenings which can be over-torqued by operators lacking feel through thick gloves shall be avoided.

3.7 Performance.

3.7.1 Rated capacity. Within 1 hour of operation after starting, the compressor shall deliver not less than 5 cubic feet per minute (cfm) of free air at a delivery pressure of 3,200 pounds per square inch (psi) when operating under all conditions specified herein.

3.7.2 Endurance. The compressor shall operate as specified herein for 200 consecutive hours without failure. At the end of this 200 hour period, the decrease in output shall be not more than 0.5 cfm when delivering air at a pressure of 3,200 psi, when tested in accordance with 4.5.2.13.

3.7.3 Tilted operation. The compressor shall deliver the rated capacity at 3,200 psi for not less than 30 minutes when tilted in any position at an angle

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

of 15 degrees from the horizontal. The compressor shall stand for not less than 2 hours in a tilted position without any evidence of leaks; faulty lubrication, cooling, or fuel supply and distribution; lubricant spill-over; or reduced performance upon stating after standing in this position.

3.8 Compression system.

3.8.2 Air compressor pump. The air compressor pump shall be of the reciprocating design with not less than four stages. The direction of rotation shall be indicated on the unit. The compressor shall be entirely air cooled.

3.8.2 Pressure tubing and fittings. All pressure tubing and fittings shall have a minimum working pressure of 3200 psi and a test pressure of 5,250 psi, and shall be of stainless steel type 304 or equivalent. All tubing and fittings shall be installed to minimize and withstand vibration and allow for thermal expansion. Provision shall be made for relieving pressure to the atmosphere from all lines in the system without disassembly of any fittings or component.

3.8.3 Valves. Manually operated shutoff, insolation, and control service valves shall be of the positive shutoff type and shall be of stainless steel type 304 or equivalent. All manually operated valve controls shall be provided with double-ended arrows showing the directions of operation and labeled at each end to indicate the functional result. The valves shall require not more than 60 inch-pounds of torque to open or close under a pressure of 3,500 psi and overtorquing to 150 inch-pounds shall not damage the valve seats. Valve seats shall be resistant to seat erosion.

3.8.4 Moisture separator. A mechanical-type moisture separator conforming to MIL-F-24152 shall be provided downstream from the aftercooler to remove condensed moisture and oil. The seperator shall have a minimum working pressure of 3200 psi and a test pressure of 5,250 psi, shall be of corrosion-resistant material. The separator shall have a volumetric capacity large enough to contain the moisture and oil which would accumulate in 20 minutes while the compressor is operating at rated capacity with a relative humidity of not less than 85 percent and an ambient temperature of 110 °F. A valve shall be provided for periodic drainage of the moisture separator. Periodic drainage shall not be required more frequently than 15 minute intervals under all conditions specified herein.

3.9 Commerical engine.

3.9.1 Engine. For the purpose of selecting the engine, the compressor shall be classified as class 11 end item in accordance with MIL-STD-141O. The engine, including all systems, components, and accessories, shall conform to MIL-STD-141O, group I gasoline, except as otherwise specified herein. The engine shall be 4-cycle and air cooled. The engine shall be furnished as a complete, self-contained, power package including; hand throttle control, fail-safe governor, manual starting system and engine stop switch. The engine shall comply with the Environmental Protection Agency and the California Air Resources Board regulations governing control of air pollution for new motor vehicles and new engines, in effect for this type of equipment on date of manufacture. The engine shall be capable of operating under all conditions

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

specified herein when using fuels and lubricants specified herein and in MIL-STD-1410, without exceeding any of the operating limits specified herein and in a table I of MIL-STD-141O, or the engines manufacturer's recommended operating limits.

3.9.2 Fuel tank. A fuel tank with a capacity for not less than 4 hours of operation at rated load shall be provided.

3.9.3 Drive. The compressor shall be either direct drive or multipile V-belt drive. When a direct drive is used, a flexible coupling shall be installed between the power unit and compressor unit. The power unit shall have a means for belt removal and adjustment when V-belt drive is used.

3.9.4 Exhaust system. The exhaust system shall be designed to present minimum hazard to the operator while starting, operating, or making minor adjustments to the engine or compressor unit while running. The system shall include a muffler and a spark arrester, or a combination muffler and spark arrester. The spark arrester shall conform to the US Department of Agriculture, Forest Service Standard 5100-1. The total backpressure of the exhaust system shall not exceed the maximum recommended by the engine manufacturer. The complete exhaust system shall be protected from the entry of rain.

3.10 Air systems.

3.10.1 Air induction system. A flexible non-corrosion, metallic hose shall be provided as an air intake extension. The hose shall be not less than 15 feet in length and shall have an adapter at one end to attach to the intake of the comperssor while the opposite end is upwind from the exhaust system. Provisions shall be made for storing the hose inside the compressor frame when the compressor is not in use. A means for preventing foreign objects form entering the flexible hose shall be provided.

3.10.2 Cooling. Cooling shall be provided by a fan or fans directing an air blast over the compressor, intercooler(s), and aftercooler(s). The intercooler(s) shall be furnished to cool the air between stages and each shall be equipped with a safety valve to protect the low pressure cylinder in case of failure of the high pressure cylinder valves. The aftercooler(s) shall be furnished between the compressor air discharge and final filter. The air temperature measured at the inlet of the final filter shall not exceed 135 °F under all operating conditions specified herein.

3.10.3 Final filter. The final filter shall be mounted vertically and installed downstream of all other pneumatic system components, and shall be designed for a working pressure of 3200 psig. With the compressor delivering air at rated capacity, under all operating conditions specified herein, the filter element shall provide air confoming to the purity requirements of BB-A-1034, grade C, ASTM F 307, and NAVSEA O994-LP-OO1-9O1O for a period of not less than 120 hours, except that the total water limit shall not apply. A moisture separator shall be installed upstream of the final filter to prevent liquid water from reaching the filter element. The design of the filter housing shall provide for replacement of the filter element by one man using only common

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:45Z
Check the source to verify that this is the currentversion before use.

tools. Gaskets and gasket sealer shall be nontoxic material. The final filter shall have a carbon monoxide removal capability and the delivered air shall not contain more than 10 parts per million carbon monoxide when 50 parts per million carbon monoxide are introduced into the compressor intake in accordance with air purity standards found in NAVSEA O994-LP-OO1-9O1O.

3.11 Pressure control valve. A pneumatic pressure control valve shall be provided to prevent the passage of air through the filter bank at pressures less than 2000 psi. The unit shall be equipped with a check valve to prevent reverse air flow of downstream air.

3.12 Control panel. A control panel shall be provided for mounting any gages, meters, and controls as specified herein. Gages, meters, and controls shall be clearly identified and shall be mounted so that they will not be damaged under any condition of compressor operation specified herein. All gages, controls, and meters necessary for operation shall be accessible and visible to a single operator standing on one side of the compressor. A schematic airflow diagram shall be permanently affixed on or near the control panel. Labelling shall comply with requirements in 3.17.1.

3.12.1 Instrumentation. Pressure gages shall be provided to indicate filter system and servicing line pressures. All pressure gages shall be the liquid fill type mounted on the control panel and shall be isolated from vibration by shock absorbing mounts. Each gage shall be vibration resistant and provisions shall be made to prevent freezing of gages under conditions specified.

3.12.2 Filler hose. A filler hose shall be provided to connect the compressor and diving tanks so that the tanks may be filled. The hose shall be a commercial type hose, 15 feet or longer in length with a minimum 5000 psi working pressure. The hose shall have a SCUBA industry standard quick release/ connect, male/female fittings at each end of the hose, an approved military diving pressure gage, and a SCUBA fill yoke complete with integral fill valve and bleeder valve.

3.13 Electromagnetic interference. The electromagnetic interference emission characteristics of the compressor unit shall conform to MIL-STD-461, class III C.

3.14 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating. Only approved lubricants as specified in NAVSEA O994-LP-OO1-9O1O shall be used on the life support portions of the compressor unit.

3.14.1 Lubricants. The compressor unit shall operate as specified herein when lubricated with military lubricants, conforming to MIL-L-17331 (2190 TEP), normal operations. No substitutions will be allowed.

3.14.2 Lubrication fittings. Nonlife support lubrication fittings shall conform to SAE J534. Fittings shall be located in a protected position and shall be accessible to a grease gun conforming to MIL-G-3859 with 10-inch flexible extension. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Panels and plates equipped with hand-operable , quick-disconnect fasteners may be removed to provide accessi-bility.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

3.14.3 Pressure-release device. A pressure-release device shall be provided where the use of pressure lubricating equipment could damage grease seals or other parts.

3.14.4 Filling, draining and checking provisions. Enclosures that contain a reservoir of lubricants for the lubrication of the parts inclosed, shall be equipped with dipsticks, check plugs, or sight gages to determine the level of the lubricant. Each enclosure shall be equipped for filling the enclosure with a lubricant and for draining. The drain outlet shall be fitted with a drain plug, size conforming to MS35844 or MS49006. The drain outlet shall be located so that removal of the plug will result in complete drainage of lubricant from the enclosure. Drainage shall be capable of draining to a container when the compressor is in its normal position. Integral tubes or troughs may be used to convey lubrication from the drain outlet.

3.14.5 Grease lubrication. All grease lubrication, including lubrication of sealed bearings, shall be with greases as follows:

a. MIL-G-23827 - For ball, roller, and needle bearings, gears, and on sliding and rolling surfaces of such equipment as instruments, electronic gear, and mechanical control systems; for use on gears, actuator screws and other equipment requiring a lubricant with high-load carrying capacity over a temperature range of minus 100 °F to plus 250 °F.

b. MIL-G-10924 - For lubrication and surface corrosion protection of all automotive equipment operated over the temperature range of minus 65 ‘F to plus 225 °F.

The compressor unit shall be assembled, run-in (broken-in), tested, and delivered with these greases. The bearings shall be cleaned before lubrication, because military greases may not be compatible with other greases. A tag shall he attached in a conspicuous place to indicate which military grease has been used.

3.14.6 Oil lubrication, Unless otherwise specified herein, all components shall be filled to the operating level with military oils designated for use in the temperature range specified herein. A tag shall be attached in a conspicuous location to indicate the temperature range, grade of lubricant used and frequency of lubrication. A warning sign shall be attached to the frame of the compressor stating “DO not mix
or interchange compressor lubricants with engine lubricants. Use only
MIL-L-17331 (2190 TEP) lubricant for compressor lubrication.”

3.15 Fungus and moisture resistance. The electrical circuitry, including all components and connections shall be protected from the effects of moisture and fungus growth by an overall treatment with a varnish conforming to MIL-V-173, composition as specified in 3.15.1. With 1 percent copper-8-quinolinolate (by weight) based on the nonvolatile content of the varnish, except:

a. Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

b. Components or circuit elements whose functions will adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a minimum dry-film thickness of 0.001 to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.15.1 Composition. Composition I shall be used unless composition II must be used in order to comply with local air pollution regulations in the application of the varnish. When composition II is used, the contractor shall provide evidence to the Government that the use of composition II is required, and shall certify that the composition II material complies with Rule 442, South Coast Air Quality Management District.

3.16 Slinging and tiedown provisions. Permanently affixed attachments for lifting and tying down, the compressor unit shall be provided, and shall conform to MIL-STD-209 for type IV equipment, including the requirements for air transport. Slinging and tiedown provisions shall be labeled “LIFT HERE” and “TIEDOWN” respectively.

3.16.1 Transportability. The compressor unit shall withstand the stresses encountered in shipment including those of the pedulum impact test specified in 4.5.2.17, without deformation or damage which results in degradation of compressor unit performance.

3.17 Identification marking. The compressor unit shall be identified in accordance with MIL-STD-130. The marking shall be applied to the compressor on plates conforming to MIL-P-514, type II, style 1, composition C, of type I, grade A, class 1 material. Plates shall be attached by screws, bolts, or rivets in a conspicuous protected location.

3.17.1 Instruction plates and labeling. Each compressor unit shall be equipped with instruction plates, including diagrams, warnings, and cautions, describing any special or important procedures to be followed in assembling, operating, or servicing the compressor unit. Instruction plates shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. Plates shall be attached by screws, bolts, or rivets in a conspicuous protected location. Labeling shall comply with MIL-STD-1472, 5.5.

3.17.2 Treatment and painting. The portions of the compressor unit normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, final color optional.

3.18 Workmanship.

3.18.1 Castings and forgings. All parts, components, and assemblies of the compressor unit which include castings and forgings shall be clean of harmful extraneous material such as sand, dirt, pits, sprues, scale, and flux. Rework shall be limited to procedures which do not reduce strength or affect function.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the current version before use.

3.18.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. Flame cutting, using tips suitable for the thickness of the steel may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.18.3 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Parent materials, weld filler metals, and fabrication techniques shall be as required to enable the compressor unit to conform to the examination and test requirements specified in section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch, unless appropriate bridging techniques are used. Unless otherwise specified (see 6.2), the welding process used in fabrication of the compressor unit shall be at the option of the contractor.

3.18.4 Welders. Before assigning any welder or welding operator to welding work covered by this specification, the contractor shall obtain certification that the welder or welding operator has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

ASME Boiler and Pressure Vessel Code, Section IX, Welding and Brazing Qualifications.
AWS, D1.1 Structural Welding Code - Steel.

Contractors who only make horizontal welds need not qualify welders for “all position welding”. The government reserves the right to require recertification of any welder or welding operator. The certification shall be made available for review by the contracting officer or his representative upon request.

3.18.5 Bolted connections. Boltholes shall be accurately formed and shall have all burrs removed. Washers and lockwashers shall be provided where necessary. Matching thread areas securing bolts or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement.

3.18.6 Riveted connections. Rivets shall fill the hole completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes and in full contact with the surface of the member.

3.18.7 Machine work. Tolerances and gages for metal fits shall conform to the limits specified herein and to the standards of the industry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

3.18.8 Cleaning of life support parts and systems. All parts and systems contained with the unit for use with oxygen and compressed air shall be cleaned and tested for cleanliness in accordance with standards of the following Duplications and procedures: MIL-STD-767, MIL-STD-1246, MIL-STD-1330, MIL-STD-1359, MIL-STD-1622, MIL-D-16791, NAVMAT P-9290, NAVMEDCOMINST 6260.3, and NEDU Air and Oxygen Systems Cleaning Procedure for Organizational Level Preventative and Corrective Maintenance. Included in the cleaning procedure is the requirement to perform an air purity sampling test after the last step of the cleaning procedure is completed to insure that the parts and systems cleaned meet the exposure limit values for breathing gas as stated in NAVMEDCOMINST 6260.3.

3.18.8.1 Conflicts. If a conflict arises with regard to which procedure or publication to use, the contracting officer shall be notified in writing by the contractor prior to any work being done under this subparagraph. The contracting officer will formally contact in writing the Naval Experimental Diving Unit (NEDU), Panama City, Florida, and request assistance to determine which document or procedure takes precedence.

3.18.8.2 Documentation. Documentation for cleaning procedures, and air purity sampling tests procedures and results for the first article unit and each production unit shall be provided to the Government.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article shall be examined as specified in table I. One or more defects shall be cause for rejection.

4.3.2 First article tests. The first article shall be subject to the tests marked "X" in column 1 of table II, in the order shown. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4,4.1 Examination. Each compressor unit shall be examined for the defects specified in table I. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each compressor unit shall be subjected to the tests marked "X" in column 2 of table II. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

TABLE I. Examination schedule.

Defects		Requirements paragraph
101.	Weight or dimensions not as specified.	3.1
102.	Configuration not as specified.	3.1
103.	Material not as specified.	3.3
104.	Materials are not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment as specified.	3.3*1
105.	Dissimilar metals as specified in MIL-STD-889 are not effectively insulated from each other as specified.	3.3.2
106.	Contractor does not have documentation available for identification of material, material finishes, or treatments.	3.3.3
107.	Safety Provisions not as specified.	3.5
108.	Maintainability provisions not as specified.	3.6.2
109.	Engine or accessories missing or not as specified.	3.9
110.	V-Belt drive not as specified.	3.9.3
111.	Compressor unit not as specified.	3.8
112.	Air induction system not as specified.	3.10
113.	Final filter not as specified.	3.10.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

TABLE I. Examination schedule. (Cont'd)

Defects		Requirements paragraph
114.	Instruments and controls missing or not as specified.	3.12
115.	Tubing not as specified.	3.8.2
116.	Lubrication provisions or tags missing or not as specified.	3.14 thru 3.14.6
117.	Fungus and moisture resistance not as specified.	3.15
118.	Slinging and tiedown provisions not as specified.	3.16
119.	Identification marking missing or not as specified.	3.17
120.	Instruction plates missing or not as specified.	3.17.1
121.	Treatment and painting not as specified.	3.17.2
122.	Workmanship not as specified.	3.18 thru 3.18.7
123.	Welding not in conformance with codes and certifications.	3.18.3, 3.18.4
124.	Air purity test not meeting specifications.	3.18.8.2, 4.5.2.10

4.5.2 Tests.

4.5.2.1 Test conditions. Prior to test, the compressor shall be lubricated with military oils and greases. Oils shall be those designated for use in ambient temperatures at place of test. The compressor unit shall operate as specified herein without maintenance other than the contractor's recommended normal scheduled maintenance as established by a maintenance schedule prepared and submitted by the contractor prior to test. Unless otherwise specified herein, tests shall be conducted with all compressor unit components and accessories, including the air intake extension, installed and functioning normally. Capacity shall be determined in accordance with the ASME Performance Test Code (PTC-9) or by calculating capacity based on weight of air delivered in a given time. Condensate removed from the air shall not be included as part of the compressor capacity. If the weight method is used, the reservoir (minimum volume 1000 cubic inches) shall be filled to 2000 plus or minimum 100 psig, and the capacity shall be determined by the following formula:

$$CFM = \frac{W_2 - W_1}{.074} \times \frac{R}{520} \times \frac{1}{t} \times \frac{29.92}{P}$$

Where: CFM = Cubic feet per minute (free air)
W1 = Empty weight of capacity check assembly (lb.)
W2 = Full weight of capacity check assembly (lb.)
R = Air temperature at cooling fan in degrees, Rankline (Farenheit, absolute)
t = Time required to fill resevoir in minutes
P = Barometric pressure in inches, Hg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

4.5.2.2 Test schedule. Test shall be in accordance with table II. It is not required that tests be performed in the order listed, except that the operation test shall be the last test perfomed.

TABLE II. Test schedule.

First article	Indi-vidual	Tests	Test paragraph	Requirement paragraph
1	2	3	4	5
x	x	Test conditions,	4,5.2.1	3.7.2
x		High temperature.	4.5.2.5	3.4.1.1
x		Low temperature.	4.5.2.6	3.4.1.1
x		Precipitation.	4.5.2.7	3.4.2
x		Tilted position.	4.5.2.8	3.7.3
x		Noise level.	4.5.2.9	3.5.1
x		Air purity.	4.5.2.10	3.10.3
x		Electromagnetic interference.	4.5.2.11	3.13
x		Slinging and tie-down provisions.	4.5.2.12	3.16
x		Endurance.	4.5.2.13	3.7.2
x		Reliability.	4.5.2.14	3.6, 3.6.1
x		Maintainability.	4.5.2.15	3.6.2
x	x	Operation.	4.5.2.16	3.7.1
x		Pendulum impact.	4.5.2.17	3.16.1

4.5.2.3 Test log. A first article log covering the run-in, engine endurance, cycling, high and low temperature, tilted operation, cleaning procedures and air purity tests results shall be established tabulating the appropriate test data. Storage temperature, precipitation, lifting and tiedown, pulling, towing, and pendulum impact test as applicable, shall also be recorded in this log.

4.5.2.4 Test conditions.

a. Unless otherwise specified herein, sequence of tests is optional with the tester.
b. Only the maintenance established by the contractor and 8ubmitted as a maintenance schedule prior to start of testing shall be perfomed during the test.
c. Safety and human factor considerations shall be evaluated throughout testing.

4.5.2.5 High temperature.

4.5.2.5.1 Test procedure. Subject the compressor unit to an ambient temperature of plus 110 'F, plus or minus 5 °F until the fuel, and the engine and compressor unit lubricating oil temperatures are stabilized. Start and operate the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

compressor unit at rated speed and capacity for not less than 10 hours while maintaining the 110 °F plus or minus 5 °F ambient temperature. No adjusting or replacing of engine or compressor components shall be permitted after the first hour of operation.

4.5.2.5.2 Test data. Record the following data at 30 minute intervals:

a. Ambient temperature in test cell, 3 to 5 feet from the unit at crankshaft level.
b. Engine lubricating oil temperature (gallery).
c. Compressor lubrication oil tempreature (sump).
d. Compressor discharge temperature (measured at inlet to final filter).
e. Compressor air pressure at discharge.
f. Compressor capacity.

4.5.2.5.3 Failure criteria. Any one or more of the following shall constitute failure of this test:

a. Engine cylinder head temperature higher than the maximum specified in 3.9.
b. Engine lubricating oil temperature higher than the maximum specified in 3.9 for the lubrication system.
c. Compressor air discharge temperature higher than 135 °F.
d. Compressor air delivery pressure less than 3200 psig.
e. Compressor discharge capacity less than 5 cfm.

4.5.2.6 Low temperature.

4.5.2.6,1 Test procedure. Subject the compressor unit to an ambient temperature of minus 25 °F plus or minus 5 °F until the fuel, and the engine compressor lubricating oil temperatures are stabilized. Start and operate the compressor unit at rated speed and capacity for not less than 10 hours while maintaining the minus 25 °F plus or minus 5 °F ambient temperature. Test data shall be recorded as specified in 4.5.2.5.2.

4.5.2.6.2 Failure criteria. Any one or more of the following shall constitute failure of this test:

a. Inability of the compressor unit to start without the use of aids.
b. Stabilized engine lubricating oil temperature not within the limits specified in 3.9 with the engine operating.
c. Compressor air discharge temperature higher than 135 °F.
d. Compressor air delivery pressure less than 3200 psig.
e. Compressor discharge capacity less than 5 cfm.

4.5.2.7 Precipitation.

4.5.2.7.1 Test procedure. The compressor unit shall be exposed to simulated rain by spraying fresh water at a minimum rate of 3 inches per hour directed simultaneously at all four sides and on top at an angle of approximately 45 degrees from the vertical. The apparatus for producing the spray shall emit

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

water in the form of droplets rather than a fine mist. After 1/2 hour exposure to the spray, the compressor unit shall be started and shall deliver rated capacity for 1/2 hour, while the spray continues.

4.5.2.7.2 Failure criteria. Any one or more of the following shall constitute failure of this test:

a. Inability of the compressor unit to start.
b. Faulty operation of any electrical switch or gage.
c. Leakage of water into internal components such as (but not limited to) the compressor unit, engine crankcase, and fuel tank.
d. Failure to deliver rated capacity.

4.5.2.8 Tilted position.

4.5.2.8.1 Test procedure. Operate the compressor unit in four tilted positions, each of which shall be 15 degrees from the horizontal plane about the compressor transverse and longitudinal axes. The test shall be conducted operating the compressor unit for 1 hour at rated capacity in each of the four positions, in a sequence whereby the compressor unit is operated first in the position least likely to adversely affect the lubrication or fuel systems, and lastly in the position most likely to adversely affect these systems. The fuel tank shall be full at the start of each position run. Upon completing the last position run, stop the engine and allow the compressor unit to stand in this tilted position for 4 hours, then operate the compressor unit for one hour at rated capacity. Capacity measurement shall be made at least once during each of the five phases of the test.

4.5.2.8.2 Failure criteria. Inability of the compressor unit to produce rated capacity, evidence of compressor unit air or fluid leaks, or any malfunction shall constitute failure of this test.

4.5.2.9 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 requirements and reported in the format indicated by MIL-STD-1474, figure 7. As a minimum: noise levels shall be measured when equipment is operating under full load. MIL-STD-1474, 5.1.2.1.4 contours shall be taken at not fewer than 12 equal (horizontal) arc increments, one increment shall include data from the noisiest position. Additionally, the noise level at the typical operating position shall be provided as dB(A) level. Failure to comply with MIL-STD-1474 provisions shall constitute failure of this test.

4.5.2.10 Air/gas purity test. The air purity and gas purity sampling tests shall be conducted in accordance with the procedures and requirements as stated in the publications and procedure documents in 3.18.8.

4.5.2.10.1 Failure criteria. Nonconformance to 3.10.3 or 3.18.8; or BB-A-1034, ASTM F 307, NAWEDCOMINST 6260.3 and NAVSEA 0994-LP-001-9010 air testing procedures and results shall constitute failure of this test.

4.5.2.11 Electromagnetic interference. The compressor unit shall be subjected to the tests specified in MIL-STD-461 for class III C equipment. Nonconformance to MIL-STD-461 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:45Z
Check the source to verify that this is the current version before use.

4.5.2.12 Slinging and tiedown provisions. The slinging and tiedown provisions shall be subjected to the loads and corresponding durations specified in MIL-STD-209 and the tiedown provisions shall be tested for the ultimate strength as specified in MIL-STD-209. Yield strength or ultimate strength not as specified in MIL-STD-209, shall constitute failure of this test.

4.5.2.13 Endurance phase. The compressor unit edurance test shall be conducted without shelter and at the climatic conditions existing at the place of test. The complete unit shall be operated (see 6.3.1) at rated capacity for 200 hours. Endurance test time will not be credited in less than 4 hour intervals of continuous operation, and a capacity computation shall be made from every fifth set of 4 hours data reading specified in 4.5.2.13.2. During the endurance phase the following shall be checked at least once:

a. Fuel tank capacity for conformance to 3.9.2.
b. Ease of starting the compressor unit with the filter system charged to a pressure not less than 2000 psig.

4.5.2.13,1 Cycling phase. The cycling phase shall be for a total test time of 8 hours. The compressor shall be cycled to operate through a complete loading-unloading cycle every 5 minutes. Unloading shall be for not more than 1 minute duration. At the end of the cycling test phase, remove the compressor from cycling operation and operate the compressor at rated capacity for 1 hour. After l-hour operation, make a capacity computation. During the cycling phase, observe the pressure control valve for operation in accordance with 3.12.

4.5.2.13.2 Test data. Air capacity shall be recorded as specified in 4.5.2.1 along with the constant factors and data used to compute the capacity figure. Air purity at the final filter outlet shall be recorded immediately before and after each filter change, and at least once in every 8 hours, plus or minus 0.5 hour of compressor operation. Air purity measurements shall be made by methods specified in BB-A-1034, ASTM F 307 and NAVSEA O994-LP-OO1-9O1O; by gas chromatography; or by any other means approved by the Government prior test. Downtime data shall be recorded each time the compressor is stopped, including the stop-time and date, accumulated operating hours, start-time and date, duration of down time in hours and minutes, the reason for each stop, and the amount of fuel and lubricants used. The following set of data shall be recorded every 4 hours, plus or minus 0.5 hour:

a. Air temperature, ambient.
b. Air temperature at compressing unit intake.
c. Air temperature at final filter inlet.
d. Air pressure at compressing unit intake.
e. Air pressure at final filter outlet.
f. Barometric pressure.
g. Engine rpm.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the current version before use.

4.5.2.13.3 Failure criteria. Any one or more of the following shall constitute failure of this test:

a. Inability of the compressor to produce rated capacity.
b. Inability of the compressor to operate for 200 hours without maintenance other than normal scheduled maintenance.
c. Fuel tank capacity not as specified in 3.9.2.
d. Pressure regulation not as specified in 3.11.
e. Air purity not as specified in 3.10.3.
f. Air temperature at final filter inlet not as specified in 3.10.2.

4.5.2.14 Reliabilty. Two compressor units shall be tested as follows:

4.5.2.14.1 Test conditions. The operational and enviornmental test conditions shall be as follows:

a. Without shelter and at the climate conditions existing at the place of test.
b. With the compressor units serviced in accordance with 4.5.2.1.
c. Shall operate at rated speed and capacity for not less than 1125 hours, with not less than 500 hours on a single unit.
d. Shall have capacity computations made on every 5th set of 4-hour data readings as specified in 4.5.2.1.

4.5.2.14.2 Test data. Test data shall be recorded as follows:

a. Air capacity shall be calculated as specified in 4.5.2.1 along with constant factors and data used to compute the capacity figure.
b. Air purity at the final filter in accordance with 4.5.2.10 recorded immediately before and after each filter change and at least once every 8 ±0.5 hours of compressor operation.
c. Down time data each time the compressor unit is stopped, to include: stop time and date; accumulated operating hours; restart time and date; duration of down time in hours and minutes; reason for each stop; and the amount of fuel and lubricants used.
d. The following shall be recorded every 4 +0.5 hours:

    (1) Air temperature, ambient.
    (2) Air temperature at compressor inlet.
    (3) Air temperature at final filter outlet.
    (4) Delivery pressure.
    (5) Air purity at compressor outlet.
    (6) Air purity at final filter outlet.

4.5.2.14.3 Accept/reject criteria. The compressor units shall complete 1125 hours with 3 or less failures and not less than 500 hours on a single unit. A failure shall be as described in 4.5.2.14.4 and all failures shall be determined by the Government. Figure 1 O-C curve applies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

4.3.2.14.4 Failure definition and scoring criteria. A failure for the purpose of this test is defined as any malfunction which the operator cannot remedy by adjustment, repair or replacement within 30 minutes (all waiting periods are excluded) utilizing the resources available to the parent unit when deployed and which causes any of the following:

a. Failure to commence operation, cessation of operation or degradation or performance below the designated levels.
b. Serious damage to the system.
c. Personnel safety hazards.
d. Air purity not as specified.

4.5.2.14.5 Test procedure . The units shall be operated continuously as described above except that preventative maintenance checks and services shall be made as prescribed by the equipment maintenance manuals. Only that maintenance established by the contractor in the maintenance schedule prior to test start is permitted during test. Stops for such maintenance shall be recorded as. previously described.

4.5.2.15 Maintainability. Maintenance operations required during first article testing shall be accomplished to determine conformance to 3.6.2. Errors or inadequacies in the manual shall not be considered in assessing the maintenance ratio.

4.5.2.15.1 Maintenance ratio. The maintenance ratio shall be computed during first article testing. Nonconformance to 3.6.2 shall constitute failure of this test.

4.5.2.16 Operation. Operate each compressor unit for not less than 10 hours utilizing all operator's controls and determine capacity. Capacity may be measured by use of a calibrated meter or bottle pump method. Air purity shall be tested in accordance with 4.5.2.10 after initial 30 minutes, after 4 hours and prior to completion of the 10 hour operation test. Inability of each compressor unit to produce not less than 5 cfm at 3200 psi, or any malfunction, leakage or rough or irregular operation shall constitute failure of this test.

4.5.2.17 Pendulum-impact test. The compressor shall be subjected to the pendulum-impact test in accordance with FED-STD-101, method 5012, except the vertical height of drop shall be 18 inches, and the compressor will be unboxed and securely mounted to a platfom which will extend beyond the frame or any member of the compressor on all four sides an designed to receive the full impact of the abutment.

4.6 Inspection of packaging. The preservation, packing, and marking shall be examined and tested in accordance with the quality assurance provisions of MIL-C-3600 and with the special requirements of section 5 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be in accordance with MIL-C-3600 with the exception that interior surfaces of air receivers which will contain air used for breathing or respiratory purposes and located downstream from the air-oil separator shall not be preserved. The degree of preservation, packing, and marking shall be level A, B, or Commercial as specified (see 6.2).

6. NOTES

6.1 Intended use. The compressor unit is intended to supply clean high pressure breathing air for charging scuba bottles.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number , and date of this specification.
b. Time frame required for submission of the first article model (see 3.2).
c. When the Government will conduct any or all of the first article model examination and tests. When the Government will conduct some but not all of the first article examination and tests, the contracting officer should specify which will be conducted by the Government and which shall be conducted by the contractor (see 3.2).
d. Welding process required when other than as specified (see 3.18.3).
e. Degree of preservation, marking, and packing required (see 5.1).

6.3 Definitions.

6.3.1 Continually. Operation in increments of not less than 3 hours except for interruptions required for normal servicing of the compressor unit. Downtime shall not be considered as operation time.

6.3.2 Maintenance ratio (MR). The ratio of the number of maintenance man-hours required for both scheduled maintenance and unscheduled repair (excluding operator daily checks and services), to the number of hours of operation.

6.4 First article. When a first article inspection is required, the items should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article.

6.5 Approved for Navy use list. The contracting officer should consult the Approved for Navy Use List (NAVSEA Inst 10560.2) to determine which vendors and equipment meet the safety standards for life support diving equipment as established by the Naval Sea Systems Command (NAVSEA), Alexandria, Virginia prior to open solicitation for this unit.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:45Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listing.

5 CFM
3200 PSI
Compressor unit
Gasoline engine driven
Diving Air
Life support


6.7 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - ME

Preparing activiy:
Army - ME

Project 4310-A109

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

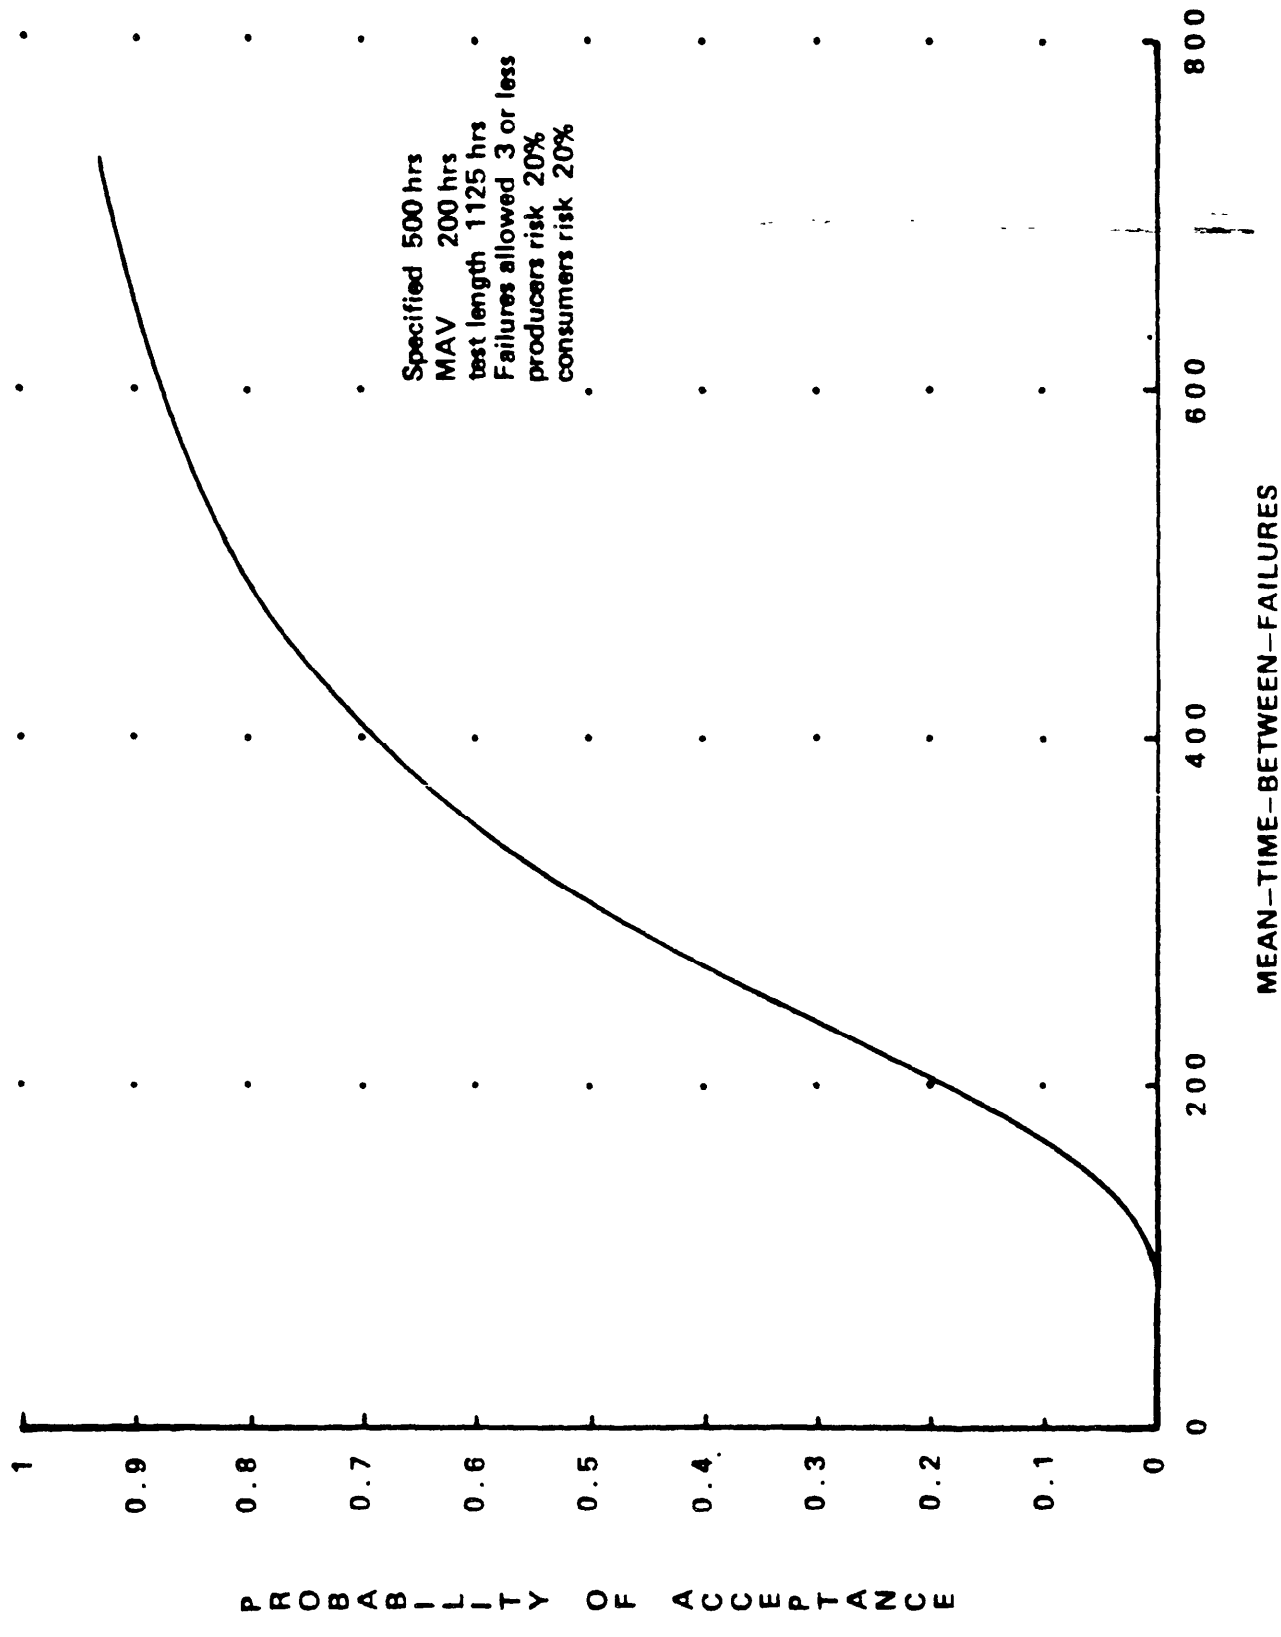

X-4718

Figure 1. OPERATING CHARACTERISTIC (O-C) CURVE

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:45Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir RDE Center
ATTN: STRBE-TSE
Ft. Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-52972A(ME)	Compressor Unit, 5 CFM, 3200 PSI, Gasoline-Engine-Driven, Diving Air

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the current version before use.