MIL-C-60577(MU)
AMENDMENT 2
28 September 1973
SUPERSEDING
AMENDMENT 1
27 September 1972

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY - THOUSANDS DECADE
MEMORY AND READOUT - A2: 10547220

This amendment forms a part of Military Specification MIL-C-60577(MU) dated 18 June 1970.

Paragraph 3.7.2.2, sixth line, delete: "Levels of 1.25 ± 0.1V and 0.2 ± 0.2V for" and substitute "Levels of 1.2 ± .4V and .25 ± .25V for".

Paragraph 3.7.2.3, second, third, and fourth line, delete: "Pin A shall be set to a logical zero (0.1 ± 0.1 VDC) and the output at Pin L shall be set to a logical one (1.1 ± 0.1 VDC) and the output at Pin n" and substitute "Pin A shall be set to a logical zero (.25 ± .25 VDC) and the output at Pin L shall be set to a logical one (1.4 ± .4 VDC) and the output at Pin n"; sixth and seventh line: delete "Pin I shall be set to 1.4 ± 0.2 VDC and Pin L shall be set to a logical zero (0.1 ± 0.1) VDC" and substitute "Pin I shall be set to 1.4 ± .4 VDC and Pin L shall be set to a logical zero (.25 ± .25 VDC).

Paragraph 3.7.2.5, second and third line: delete "Pin 0 shall be a logical zero (0.1 ± 0.1 VDC)" and substitute "Pin 0 shall be a logical zero (less than .3 VDC)"; fourth and fifth line: delete "Pin 0 shall be a logical one (1.1 ± 0.1 VDC)" and substitue "Pin 0 shall be a logical one (1.1 ± .2 VDC)."

Paragraph 3.7.2.6, second and third lines: Delete "Pins I and L shall be 1.1 ± 0.1 VDC and 0.1 ± 0.1 VDC respectively" and substitute "Pins I and L shall be 1.4 ± .4 VDC and .25 ± .25 VDC respectively"; fourth line: Delete "Pin I shall change to 0.1 ± 0.1 VDC" and substitute "Pin I shall change to less than .3 VDC".

Paragraph 3.7.2.7, first and second line: Delete "a positive 1.2 ± 0.1V, 20 microsec pulse shall appear at Pin E" and substitute "A positive 1.15 ± .25V pulse, with width greater than 7.4 microseconds shall appear at Pin E"; Delete "+2.3V ± 0.2V at Pin b.
+1.7V ± 0.2V at Pin d.
+1.2V ± 0.2V at Pin f."

and substitute "+2.3 ± .5V at Pin b.
1.73 ±.41V at Pin d.
1.5 ± .4V at Pin f."

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Paragraph 4.3.4: Delete paragraph and substitute:

"4.3.4 Certification.- Certification shall include test data and results for the characteristics specified below. Certification shall be provided prior to performing final acceptance inspection, and remain in effect throughout the performance of the contract. This does not relieve the contractor from inspection throughout the contract production, including recording data and results therefrom. Recorded data and results shall be made available to the Government upon request. A new certification shall be required whenever any change(s) occur in materials, manufacturing processes and techniques previously certified. Exception to the above may be provided by certificate of compliance (COC) for those items for which the contractor cannot obtain recorded data, i.e., off the shelf items. This exception shall not apply without prior approval by Frankford Arsenal. Request for approval shall include item name, part number, identification of supplier, and justification for exception; and shall be forwarded to Commanding Officer, Frankford Arsenal, ATTN: SARFA-CO."

* Paragraph 4.6.1: Delete third sentence and substitute "The vibration equipment shall be capable of providing the conditions of amplitude, frequency and duration specified in 3.4.".

* Paragraph 4.6.1: Add the following sentence, "The vibration test shall be performed in accordance with Figure 514-1, Curve C, of MIL-STD-810, except double amplitude shall not exceed .036 inch."

* Paragraph 4.6.2, second sentence: Delete ""Procedure II" and substitute "Procedure I".

* Paragraph 4.6.5.1: Add "a" and "b" at the beginning of each of the first two sub-paragraphs respectively.

* Paragraph 4.6.5.1: Delete all after the first two lines on page 12 in its entirety, and the remaining part of paragraph 4.6.5.1, on page 13 and substitute the following:

c. Apply a positive pulse to Pin H. Pin A shall take on a DC level of .25 ± .25 VDC. Remove the +3.5 VDC from Pin Q. The DC level at Pin A shall be maintained. Connect the 3.5 VDC to Pin Q. Apply a positive pulse to Pin H and then apply ten pulses from the manual pulse generator to Pin J. After the tenth pulse has been applied to Pin J, the numeric display shall indicate a zero "0" and Pin A shall assume a DC potential of 1.4 ± .4 VDC. Remove the +3.5 VDC from Pin Q. Pin A shall maintain the DC level it had prior to the removal of the voltage from Pin Q.

d. Apply a ground potential to Pin M. Momentarily apply a positive reset pulse to Pin H. The following conditions shall exist:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Pin L shall be 1.4 ± .4 VDC.
Pin I shall be less than .3 VDC.
Pin A shall be .25 ± .25 VDC.
Pin n shall be less than .5 VDC.

e. Remove the 3.5 VDC from Pin Q. The potential at Pin L shall remain at the potential it had prior to the removal of the voltage from Pin Q. Reapply the 3.5 V to Pin Q.

f. Maintain the ground potential at Pin M and momentarily apply a positive pulse (+ 1.2 V ± 0.2 V) to Pin K. The following conditions shall exist:

Pin L shall be .25 ± .25 VDC.
Pin I shall be 1.4 ± .4 VDC.

g. Maintain a ground potential at Pin M and apply 1.2 ± 0.2 V potential to Pin N. The following conditions shall exist:

Pin L shall be .25 ± .25 VDC.
Pin I shall be less than .3 VDC.

h. Remove the ground potential from Pin M. The following conditions shall exist:

Pin I shall be 1.4 ± .4 VDC.
Pin L shall be .25 ± .25 VDC.

i. Remove the 3.5 VDC from Pin Q. The DC potential established at Pin L prior to the removal of the voltage from Pin Q shall be maintained.

j. Reapply the 3.5 VDC to Pin Q. Apply a ground potential to Pin U and a potential of +1.2 V ± 0.2 V to pin W. A potential of less than .3 VDC shall be established at Pin 0.

k. Apply a ground potential to Pin W and a + 1.2 V ± 0.2 DC potential to Pin U. A DC potential of less than .3 VDC shall be established at Pin 0.

l. Apply a + 1.2 ± 0.2 VDC potential to both Pin W and Pin U. A DC potential of less than .3 VDC shall be established at Pin 0.

m. Apply a ground potential to both Pin W and Pin U. A DC potential of 1.1 ± .2 V shall be established at Pin 0.


n. Momentarily apply a 4.0 VDC through the test circuitry to Pin Z. As this voltage is applied a positive pulse 1.15 ± .25 V shall appear at Pin E for a duration of at least 7.4 micro sec.

o. Apply a DC potential of +4.0 V through the test circuitry to Pin G. The following conditions shall exist:

Pin b shall be + 2.3 ± .5 VDC.
Pin d shall be +1.73 ± .41 VDC.
Pin f shall be +1.5 ± .4 VDC.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

FIGURE 2: Delete in its entirety and substitute:

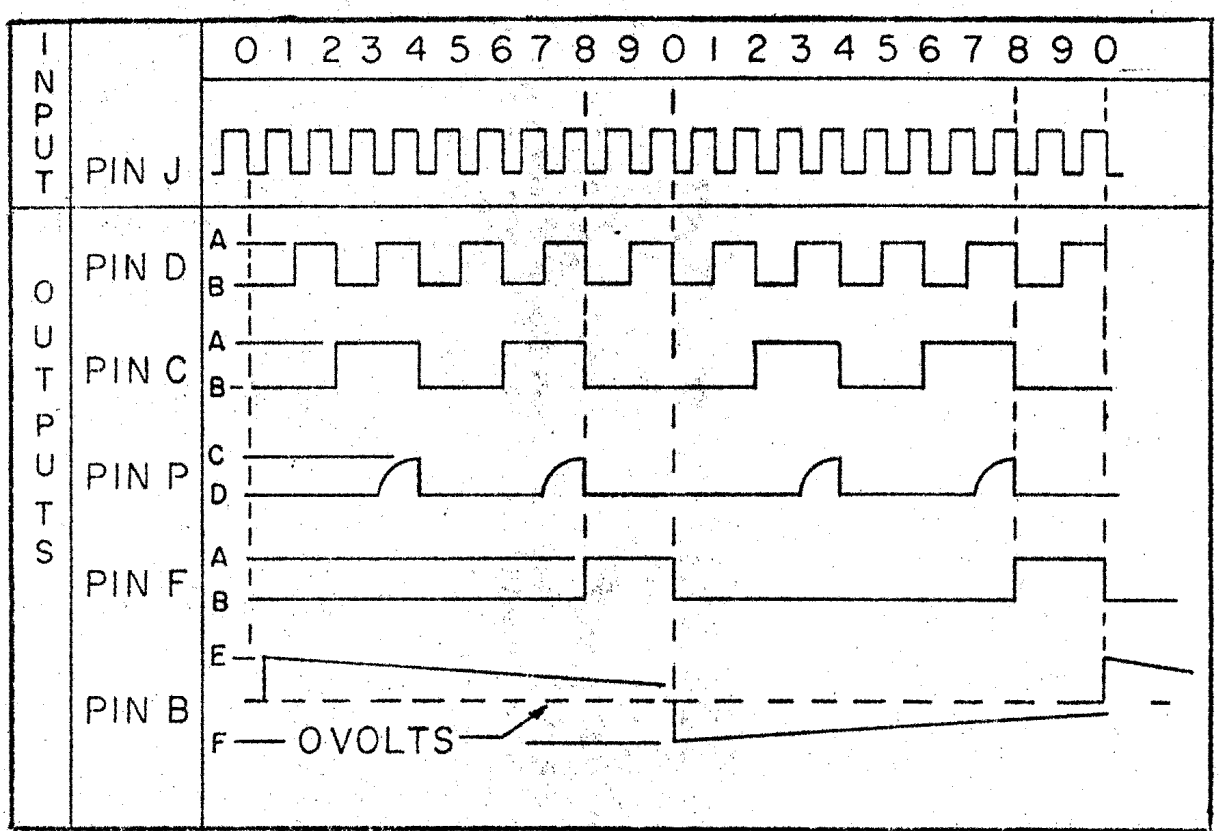

AMPLITUDES

	+70°F	+155°F	-65°F
A	1.0V MIN	.85V MIN	1.2V MIN
B	.21V MAX	.28V MAX	.20V MAX
C	.8V MIN	.8V MIN	.8V MIN
D	.3V MAX	.3V MAX	.3V MAX
E	1.2V MIN	1.2V MIN	1.2V MIN
F	-1.2V MIN	-1.2V MIN	-1.2V MIN

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

* "The margin of this specification is marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue."

Custodian:

Army - MU

Preparing Activity

Army - MU

Project No. 1240-A555

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.