INCH-POUND

MIL-C-55302/31J
7 June 1993
SUPERSEDING
MIL-C-55302/31H
31 October 1988

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: KEYING ACCESSORIES

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302

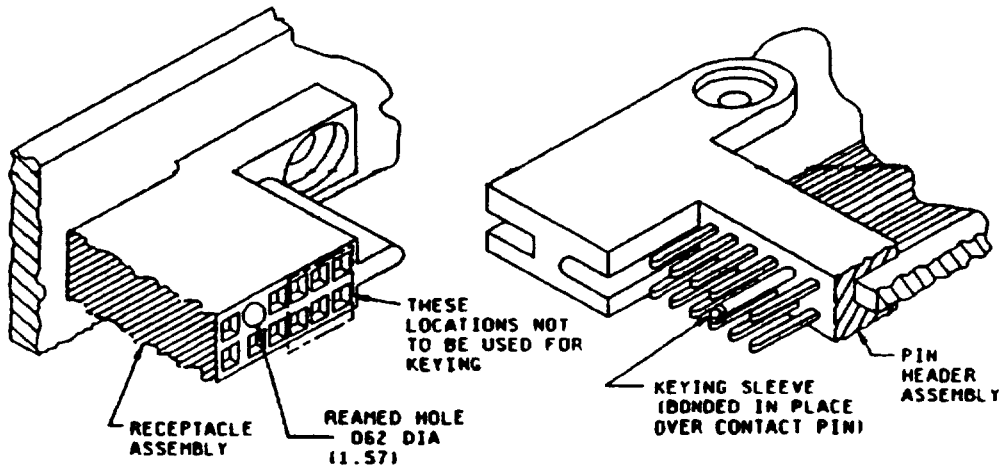


FIGURE 1. Installation of keying sleeve.

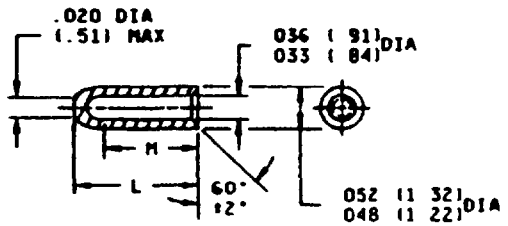


FIGURE 2 Keying sleeve

(J) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

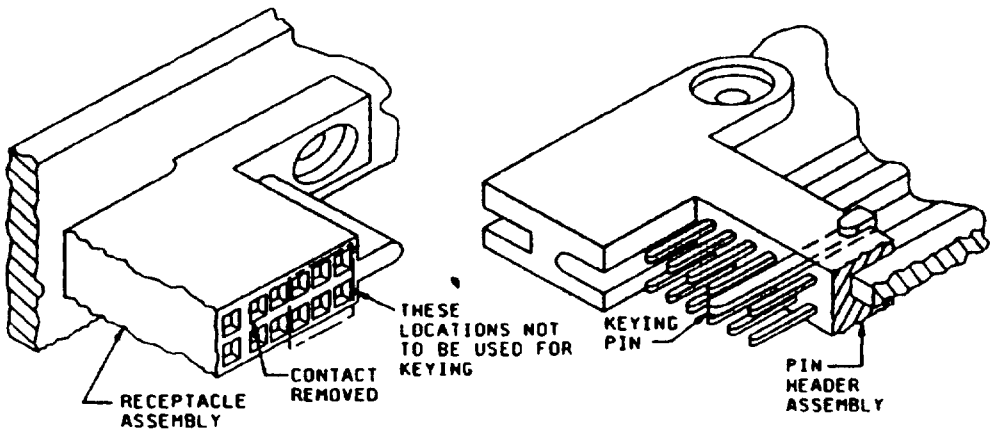


FIGURE 3 Installation of keying pin

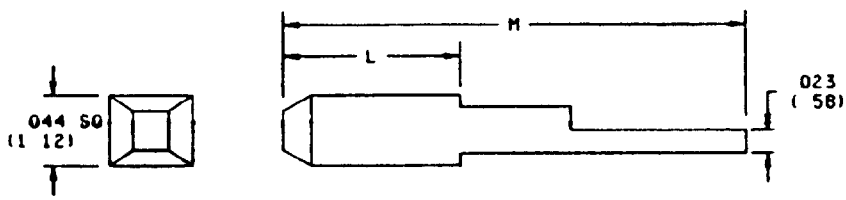


FIGURE 4 Keying pin.

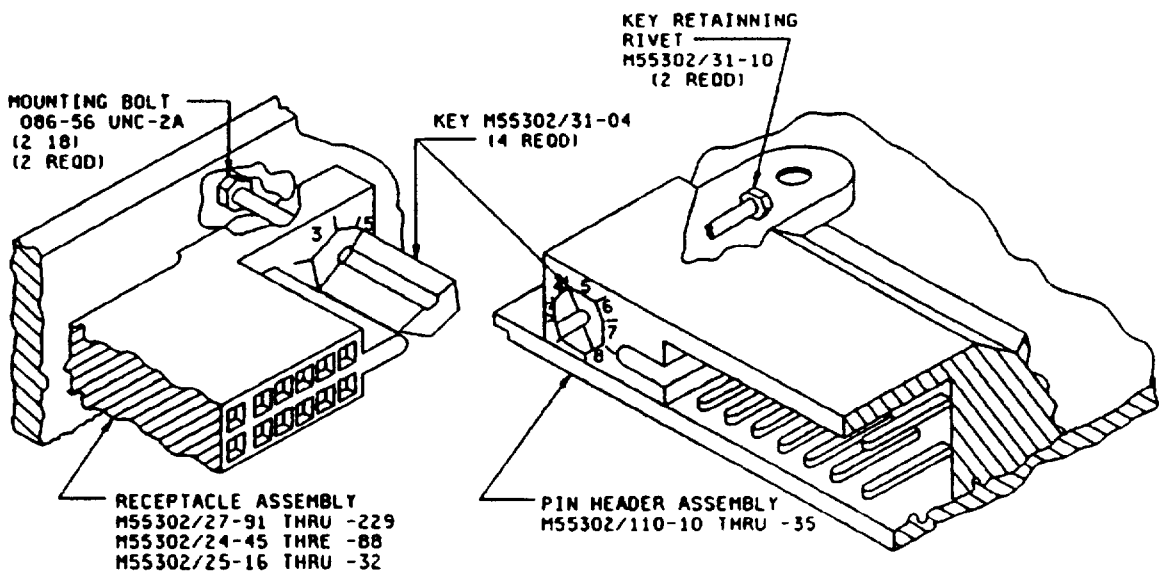


FIGURE 5 Installation of external key (position 6 shown)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

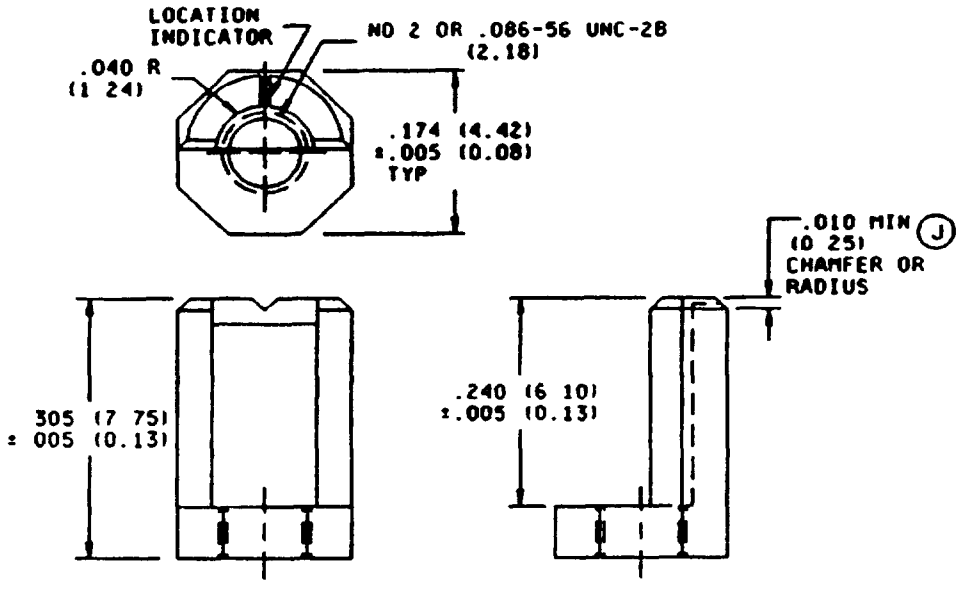


FIGURE 6 External key, M55302/31-04.

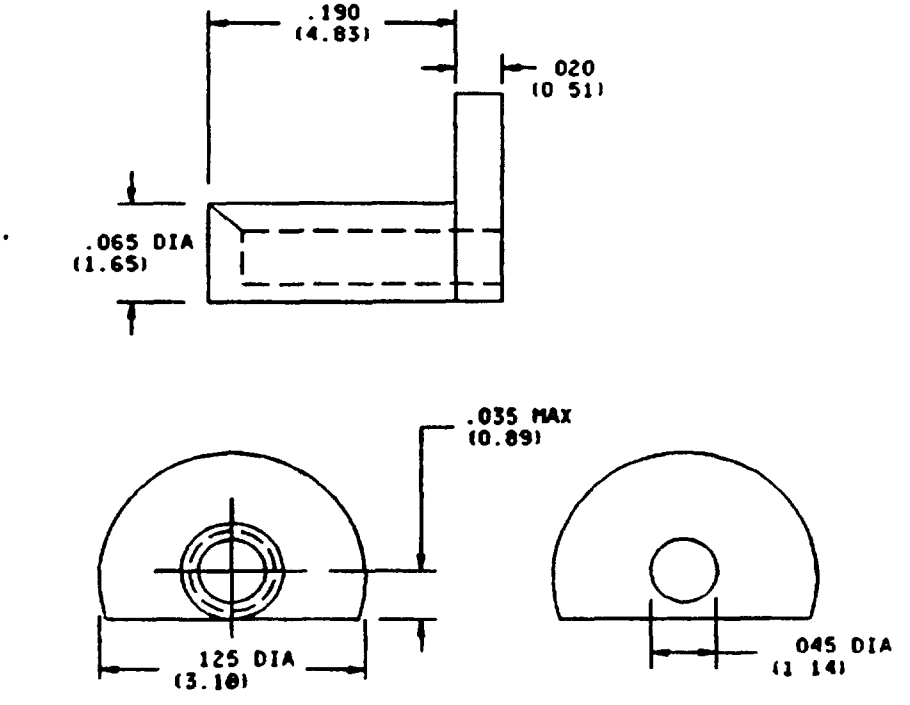


FIGURE 7 Retaining rivet for external key, M55302/31-05

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

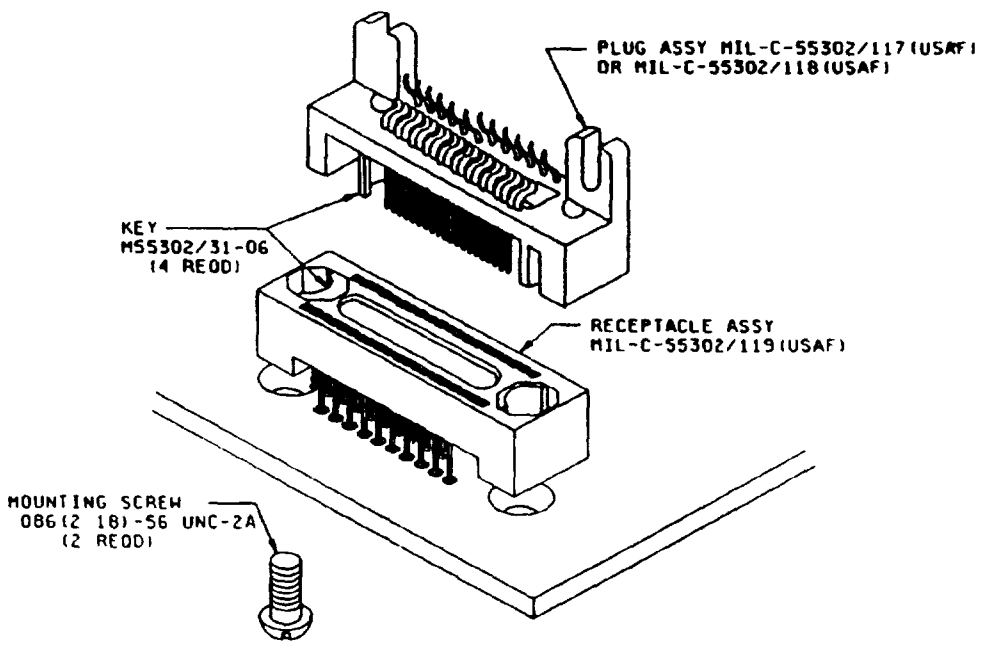


FIGURE 8 Installation of external key

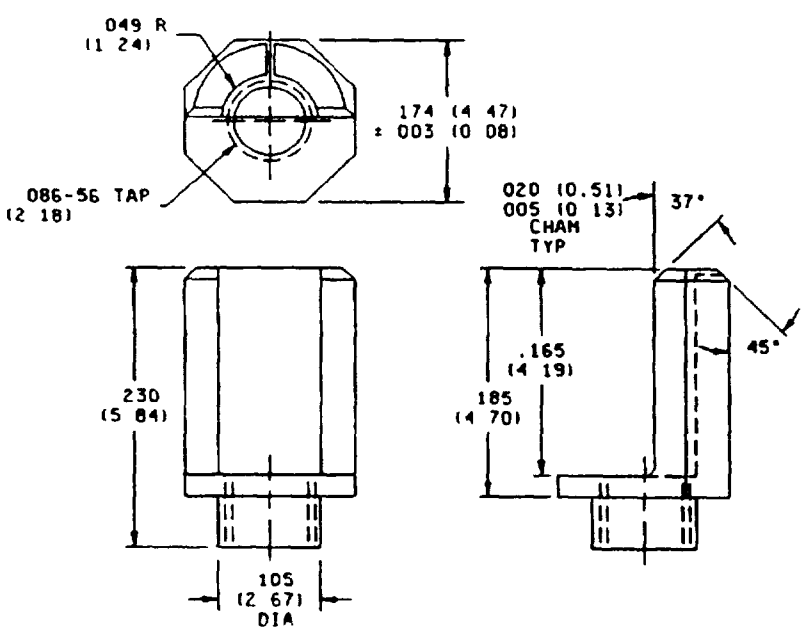


FIGURE 9 External key, M55302/31-06

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

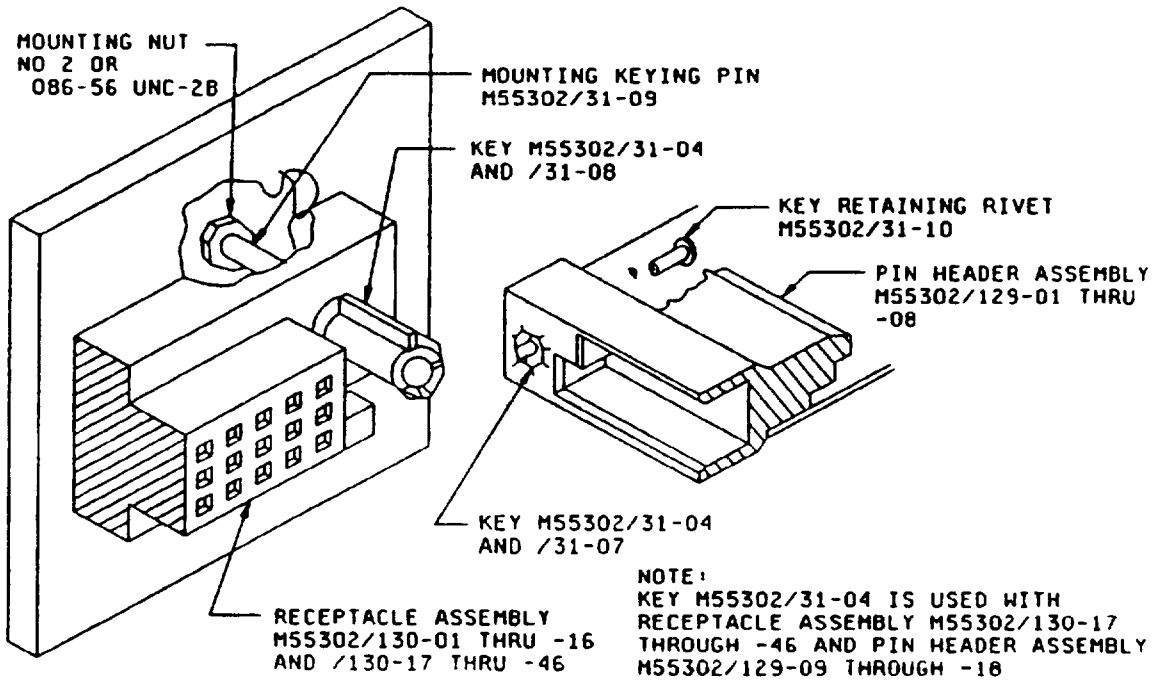


FIGURE 10. Installation of external key

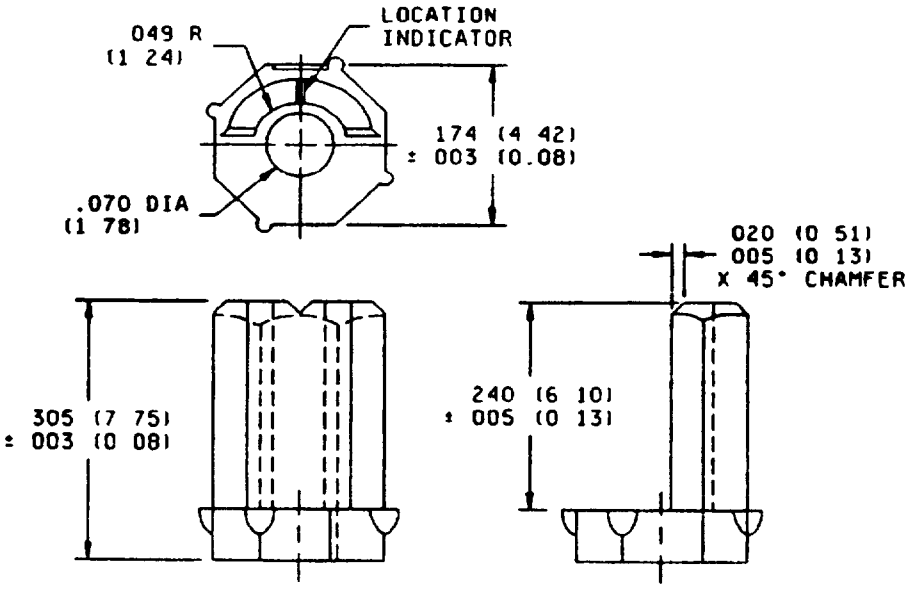


FIGURE 11 External key, M55302/31-07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

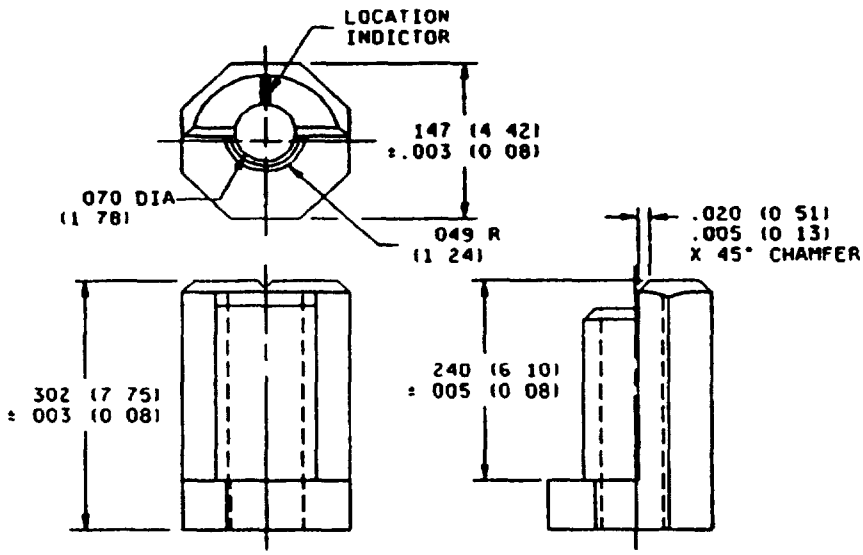


FIGURE 12. External key, M55302/31-08

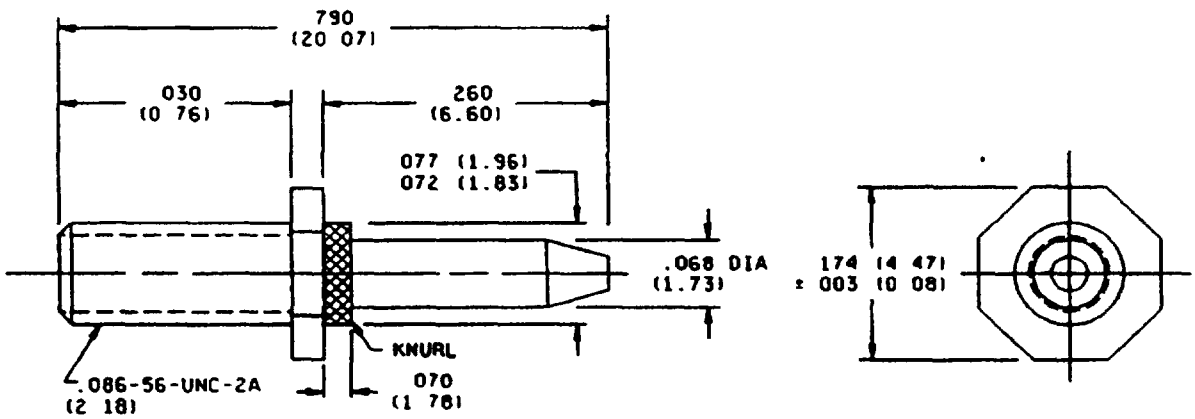


FIGURE 13. Mounting/keying pin, M55302/31-09

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

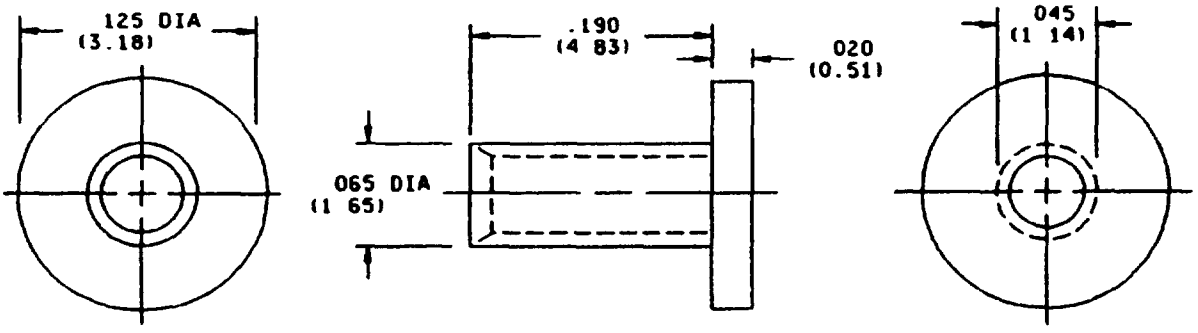


FIGURE 14 Retaining rivet for external key, M55302/31-10

TABLE I Part numbers

Type	Key part number	L	M	Figure
I	M55302/31-01	.305 (7.75)	.240 min (6 10)	1, 2
I	M55302/31-02	.250 (6.35)	225 min ((5.72)	1, 2
II	M55302/31-03	.227 (5.77)	.700 ±.015 (17 78) ±(38)	3, 4
III	M55302/31-04	---	---	5, 6
III	M55302/31-05	---	---	5, 7
III	M55302/31-06	---	---	8, 9
IV	M55302/31-07	---	---	10, 11
IV	M55302/31-08	---	---	10, 12
IV	M55302/31-09	---	---	10, 13
(J) III	M55302/31-10	---	---	10, 14

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only.
3, Unless otherwise specified, tolerance is ± 005 (0 13 mm)
4 Metric equivalents are in parentheses

FIGURE 15 Notes and table for figures 1 through 14

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimension and configuration. See figures 1 through 14

Material

Types I and II: Brass in accordance with QQ-B-626.

Type III:

Key Stainless steel in accordance with QQ-S-763

Rivet: Brass in accordance with QQ-B-626

Type IV

Key Glass-filled polyester in accordance with MIL-M-24519, type GPT-30F

Mounting/keying pin Stainless steel in accordance with QQ-S-763

Finish

Types I and II Nickel in accordance with QQ-N-290

Type III:

Key Passivate in accordance with QQ-P-35

Rivet Nickel in accordance with QQ-N-290

Type IV

Mounting/keying pin Passivate in accordance with QQ-P-35

Application

Types I and II. This keying shall be used with connectors, as defined in MIL-C-555302/23, MIL-C-55302/24, MIL-C-55302/25, MIL-C-55302/26 and MIL-C-55302/27.

Type III This keying shall be used with connectors, M55302/27-91 through M55302/27-229, M55302/110-10 through M55302/110-35, M55302/117-01 through M55302/117-11, M55302/118-01 through M55302/118-11, and M55302/119-01 through M53302/119-11, M55302/129-09 through M55302/129-18 and M55302/130-17 through M55302/130-46

Type IV. This keying shall be used with MIL-C-55302/110, MIL-C-55302/129 and MIL-C-55302/130

Installation

Type I: For receptacle assemblies MIL-C-55302/24, MIL-C-55302/25, and MIL-C-55302/27, remove contact and ream cavity to .062 inch diameter hole. For plug assemblies MIL-C-55302/23 or MIL-C-55302/26-, bond keying sleeve with 3M adhesive (EC-2216 or equivalent) in place over contact. (See figure 1)

Type II For receptacle assemblies MIL-C-55302/24, MIL-C-55302/25, and MIL-C-55302/27, remove contact. For plug assemblies MIL-C-55302/23, MIL-C-55302/26, remove contact and insert keying pin as shown. Secure in place by bending tail over outside edge of housing. Trim excess material. (See figure 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

Recommended keying

Types I and II. Two keys of same type located on oposite ends of connector excluding first six contacts on each end

Types III and IV (-04, -05 and -10). See figures 5 and 10

Receptacle assembly For part numbers M55302/27-91 through M55302/27-229, M55032/24-45 through M55302/24-88, M55302/25-16 through M55302/25-32, and M55302/130-17 through M55302/130-46, place key (-04) in numbered position as indicated by location slot (position 6 shown) and secure in place with 086 - 56 screw inserted through printed circuit board

Plug assembly For part numbers M55302/129-09 through M55302/129-18, M55302/110-10 through M55302/110-35, M55302/23-16 through M55302/23-30 and M55302/26-10 through M55302/26-22, place key (-04) in the identically numbered position as indicated by location slot (position 6 shown) and secure in place with rivet M55302/31-05 or M55302/31-10, using AMP tool part number 91117-1, 911173 or equivalent

Type III (-06) See figure 8

Receptacle assembly For part numbers M55302/119-01 through M55302/119-11, place key (-06) in one of the eight possible locations and press fit into mounting hole, then secure in place with 086 - 56 screw inserted through printed circuit board

Plug assembly. For part numbers M55302/117-01 through M55302/117-11, or M55302/118-01 through M55302/118-11, place key (-06) in the identical position as the receptacle (M55302/119-01 through M55302/119-08) and press fit into mounting hole

Type IV (-07, -08, and -09) See figure 10

Receptacle assembly For part numbers M55302/130-01 through M55302/130-16, mount connector to printed circuit board with mounting/key pin (-09) and secure with mounting nut Place key (-08) over pin and press fit in to one of the eight possible locations

Plug assembly For part numbers M55302/129-01 through M55302/129-08, place key (-07) in the identical position as the receptacle (M55302/130-01 through M55302/130-16) and secure in place with rivet M55302/31-10 using AMP tool part number 91117-3 or equivalent

Part number. M55302/31- (and dash number from table I)

Visual and mechanical inspections, required in accordance with MIL-C-55302

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities
Army - AR, MI
Navy - AS, OS, SH
Air Force - 99
DLA - ES

User activities
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3858-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.