INCH-POUND

MIL-DTL-82114C(MC)
9 October 1997
SUPERSEDING
MIL-C-82114B(MC)
16 December 1994

DETAIL SPECIFICATION

COAT FRONT - FOR COATS, MUSICIANS

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers requirements for coat fronts designed to be used in the manufacture of coats worn by U.S. Marine Corps musicians.

1.2. Classification. Coat fronts will be of one type and will be furnished in the following classes and sizes (see 6.2).

Class 1 - For Coat, Man's, Musician's
Class 2 - For Coat, Woman's, Dress Blue (Ceremonial)
Class 3 - For Coat, Woman's, Full Dress (Musician's)
Class 4 - For Jacket, Woman's, Full Dress and Jacket, Woman's Special Full Dress (Musician's)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-D), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

Schedule of sizes

(Short, Regular, Long, Extra Long)

Men's
34 35 36 37 38 39 40 41 42 44 46

Women's
X0 2 4 6 8 10 12 14 16 18

2. APPLICABLE DOCUMENTS

2.1. General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2. Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50129	- Cloth, Flannel, Lightweight
A-A-52094	- Thread, Cotton
A-A-52105	- Cloth, Interlining, Cotton or Synthetic Warp, and Spun Hair-Wool or Rayon Filling
A-A-52106	- Cloth, Twill or Plain Weave, Polyester and Polyester Blend
C-F-206	- Felt Sheet: Cloth, Felt, Wool, Pressed
DDD-L-20	- Labels: For Clothing, Equipage, and Tentage (General Use)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL
FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

(Unless otherwise indicated, copies of the above specifications, standards, handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3. Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036.)

2.4. Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1. Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2. First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

3.3. Materials.

3.3.1 Basic material. The basic material for coat fronts shall be cotton warp and spun hair-wool filling interlining cloth conforming to type I of A-A-52105.

3.3.2 Haircloth. The chest piece and the reinforcement piece for the top front corner of the left and right coat fronts shall be haircloth made with natural color, 2-ply cotton yarn in the warp and natural horsehair in the filling. The finished cloth shall have a minimum thread count of 60 per inch in the warp and 40 per inch in the filling, shall weigh not less than 4.5 ounces per square yard, and shall contain not more than 1.0 percent of non-fibrous material. The horsehair shall meet current quarantine laws and pertinent regulations of the U.S. Department of Agriculture as set forth in the Code of Federal Regulations.

3.3.3 Padding. The padding shall be flannel or felt conforming to the following.

3.3.3.1. Flannel. The material shall be cloth, cotton flannel, unbleached, double napped, conforming to A-A-50129.

3.3.3.2. Felt. The felt shall be pressed wool conforming to the requirements for type III (roll felt), classification 11A2, 3.5 ounce of C-F-206.

3.3.4 Polyester twill. The pieces to cover the exposed bottom edge of the haircloth chest piece and to cover the haircloth reinforcement piece at the top front corner of coat fronts and front edge of chest piece (see Figure 1) shall be cloth, twill, polyester and cotton, 2.9 ounce, lightweight conforming to class 2 of A-A-52106, in natural shade.

3.3.5 Thread. The thread shall be cotton, soft finish, unbleached or white, ticket No. 70, 2-ply conforming to type I of A-A-52094.

3.3.6 Labels. Each coat front shall have an identification label (applicable only when coat fronts are purchased directly by the Government), and a size marking conforming to the requirements of DDD-L-20. The label shall show fastness to dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

3.3.6.1. Identification. The identification label shall conform to type IV, class 1 of DDD-L-20, except that the characters of the inscription shall be not less than 1/4 inch in height, and shall be applied directly above the size label.

3.3.6.2. Size. The size label shall conform to type IV, class 2 of DDD-L-20, except that the characters of the inscription shall not be less than 1/2 inch in height and shall be applied to the bottom end of each front. The size marking shall include the numerical designation followed by S for Short, R for Regular, L for Long, and XL for Extra Long. Each coat front shall be marked to indicate the left front and the right front preceding the size designation with the letters LT for left and RT for right as shown in the following examples:

LT 37-38-39R RT 37-38-39L

3.4. Design. The coat fronts shall be as shown in Figures 1 through 4. Classes 1, 2, 3 and 4 are designed for coats with stand-up collars worn by the U.S. Marine Corps Band, and Drum and Bugle Corps and Ceremonial personnel.

3.5. Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size and directional lines for cutting, and are marked or notched for proper placement and assembly of component parts.

3.5.1 List of pattern parts. The coat fronts shall be cut from the specified materials in accordance with the number of pattern parts indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

ITEM	PATTERN NOMENCLATURE	NO. OF CUT PARTS
	Material: Basic	
1 2 3	Body part Shoulder dart stay Waist dart stay	2 2 2
	Material: Haircloth	
4 5	Chest piece Top front corner reinforcement	2 2
	Material: Felt or flannel	
6	Chest padding	2
	Material: Cloth, twill, polyester/cotton	
7 8	Top front corner reinforcement and chest piece front edge covering Chest piece bottom edge covering	2 2

3.6. Construction.

3.6.1 Manufacturing requirements. The coat fronts shall be manufactured in accordance with the operations and the stitch type specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the coat fronts.

3.6.1.1. Stitches and stitchings. The stitch type specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2. Pressing. Steam shrinkage and dry pressing operations specified in Table III shall be performed on steam pressing machines shaped for right and left fronts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
1	Cutting.					
	a. Cut coat fronts in strict accordance with patterns furnished.					
	b. Cut the material in the directions indicated by directional lines on pattern.					
2	Replacement of damaged parts.					
	a. Replace at time of cutting any part containing damages, such as holes or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns and large exposed drill holes.					
3	Make coat fronts.					
	a. Abut or overlap (1/8 inch) the edges of the shoulder and waist darts on the front sections and stitch together through the polyester/cotton dart stay.	304	FSa-1 or LSa-1	4-8	70/2	70/2
	The abutted or overlapped edges may be stitched together prior to stitching through stay.					
	b. Abut or overlap (1/8 inch) the edges of the shoulder and waist darts on the chest piece and stitch together.	304	FSa-1 or LSa-1	4-8	70/2	70/2
	c. Position the haircloth reinforcement piece at the top front corner of the coat front on the inner side of the body sections. Place the chest piece on top of the haircloth reinforcement; place the padding and the polyester/cotton covering for the front edge on top of the chest piece. Quilt all parts together with vertical rows of stitching 3/8 to 3/4 inch apart, and with curved rows toward the armhole, and the shoulder portion shall be left open to accommodate the shoulder pads.	304	FSa-1 or LSa-1	4-8	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
3	Make coat fronts. (cont'd)					
	d. Place the polyester/cotton covering over bottom edge of chest piece and stitch both edges of cover to fronts.	304	FSa-1 or LSa-1	4-8	70/2	70/2
	e. Steam shrink fronts and press dry to conform to shape of body.					
	f. Pair one right front with one left front of the same size.					
4	Labels.					
	a. Each finished coat front shall have the identification and size labels applied as indicated (see 3.3.6) on the respective figures.					

3.7. Workmanship. The coat front shall conform to the quality and grade of product established by this specification.

3.8. Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

4. VERIFICATION

4.1. Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

4.2. Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the provisions set forth in ANSI/ASQC Z1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

4.3. First article inspection. When first article is required, inspection shall be made of a completely fabricated coat front for conformance to all provisions of this specification.

4.4. Conformance inspection.

4.4.1 Testing of components. Testing of components shall be made in accordance with subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. In addition to testing provisions contained in subsidiary specifications and standards, testing shall be performed on components in Table II for characteristics noted. When the data in the "Determinations per sample unit" and the "Results reported as" columns are not specified in Table II, they shall be as required by the referenced test method. The method of testing shall be as specified in FED-STD-191, wherever applicable.

4.4.1.1. Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample unit for testing the haircloth shall be 1 yard full width. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

TABLE III. Test methods.

Components	Characteristics	Reqmt. para.	Test method	No. det. per S/unit	Results reported as
Haircloth	Material identification: - warp - filling	 3.3.2 3.3.2	 1200 Std com'l	1	Pass or fail
	Yarn ply, warp	3.3.2	Visual	1	Pass or fail
	Yarns per inch	3.3.2	5050		
	Weight oz. per sq. yd.	3.3.2	5041		
	Non-fibrous material	3.3.2	2611		

4.4.2 Examination of the end item. The end item shall be examined for defects listed in 4.4.2.1. The sample unit shall consist of a pair of coat fronts.

4.4.2.1. General defects. General defects shall be classified as follows:

Examine	Defects	Classification		
		Major	Minor A	Minor B
Material defects	a. Any weakening defect such as a hole, smash, multiple float or loose slub.	101		
	b. Cut, tear, needle chew or burn.	102		
	c. Permanent crease on lapel part.	103		
Cleanness	a. Ink, oil, grease spot or stain.		201	
Component and assembly	a. Any component part or required operation omitted. (Unless otherwise indicated herein.)	104		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
Cutting	a. Any component part not cut in accordance with directional lines indicated on pattern or in accordance with specification requirements.		202	
Pressing	a. Omitted on one or both fronts, or not pressed to conform to shape of body.	105		
Seams and stitching	a. Part of front caught in an unrelated operation or stitching.	106		
	b. Any part badly pleated or puckered in stitching.		203	
Stitches missing or broken	a. More than 1 inch in length in one or more places.		204	
Seam or stitch type	a. Wrong seam or stitch type.	107		
Stitch tension	a. Loose tension resulting in a loose seam on major portion of seam.		205	
	b. Tight tension on major portion of seam. (Stitches break when normal strain is applied to seam or stitching.)		206	
NOTE: Puckering is an indication of tight tension. When puckering is evident, the seam shall be tested by exerting pull on lengthwise direction of seam.				
Stitches per inch	a. Less than minimum or more than maximum specified. (To be scored only when condition exists on major portion of seam.)		207	
Size label	a. Missing, incorrect or illegible on one or both fronts.		208	
	b. Not located on lower end of each left and right front.			301

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
Size label (cont'd)	c. Lettering and numerals less than 1/2 inch in height.			302
Identification labels (applicable when coat fronts are purchased directly by the Government)	a. Missing, incorrect or illegible on one or both fronts.		209	
	b. Not located directly above size marking.			303
	c. Lettering and numerals less than 1/4 inch in height.			304
Pairing	a. Two rights or two lefts paired.	108		
	b. Different sizes paired.		210	
Shoulder and waist dart	a. Edges not abutted or overlapped as specified.		211	
	b. Not stitched through polyester/cotton dart stays.		212	
Chest piece and chest padding	a. Chest piece omitted.	109		
	b. Haircloth reinforcement at top front of body sections omitted.	110		
	c. Polyester/cotton covering at top front edge of body section omitted.		213	
	d. Rows of stitching less than 3/8 inch or more than 3/4 inch apart.	111		
	e. Polyester/cotton covering at bottom edges of chest piece omitted.		214	
	f. Padding not extending beyond the armhole.	112		
	g. Shoulder portion not left open to accommodate shoulder pad.	113		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1. Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by Department of Defense (DoD) personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's Systems Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1. Intended use. Coat fronts covered by this specification are intended to be used in the manufacture of coats for the U.S. Marine Corps Band (except the enlisted man's Blue Dress Coat), the Drum and Bugle Corps and Ceremonial personnel.

6.2. Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2).
c. Packaging requirements (see 5.1).
d. Class and size required (see 1.2).
e. Whether first article is required (see 3.2).
f. Number of coat fronts in first article (see 4.3).

6.3. Standard sample. For information regarding availability of a standard sample and patterns, address inquiry to the procuring activity issuing the invitation for bids.

6.4. Figures. Figures 1 through 3 are furnished for information purposes only. To the extent of any inconsistencies between the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

written specification and the figures, the written specification will govern.

6.5. Subject term (keyword) listing.

Felt
Flannel
Haircloth

6.6. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy - MC
Project No. 8315-N631

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

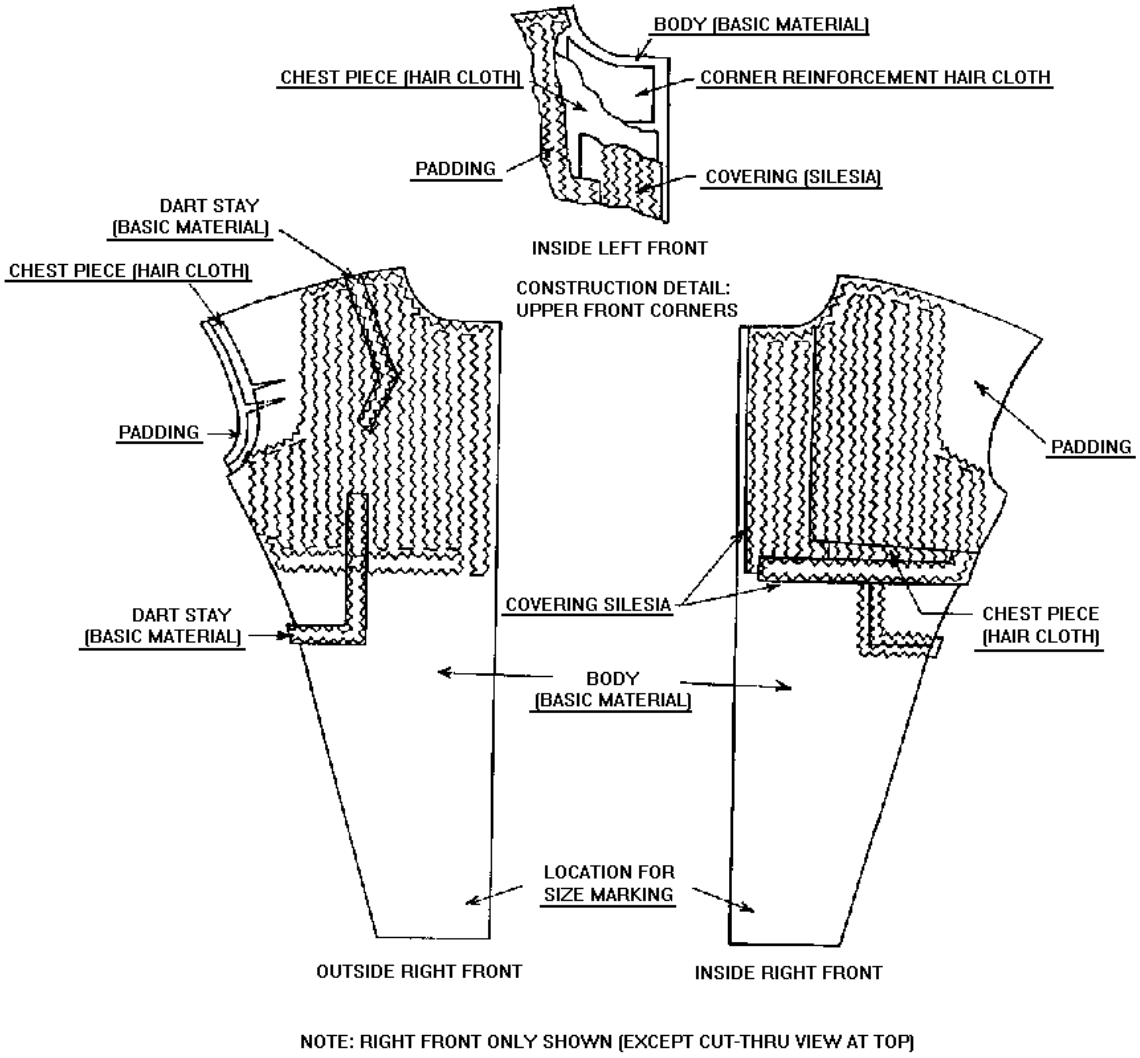


Figure 1. Coat Front - For Coat, Man's, Musician (Class 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

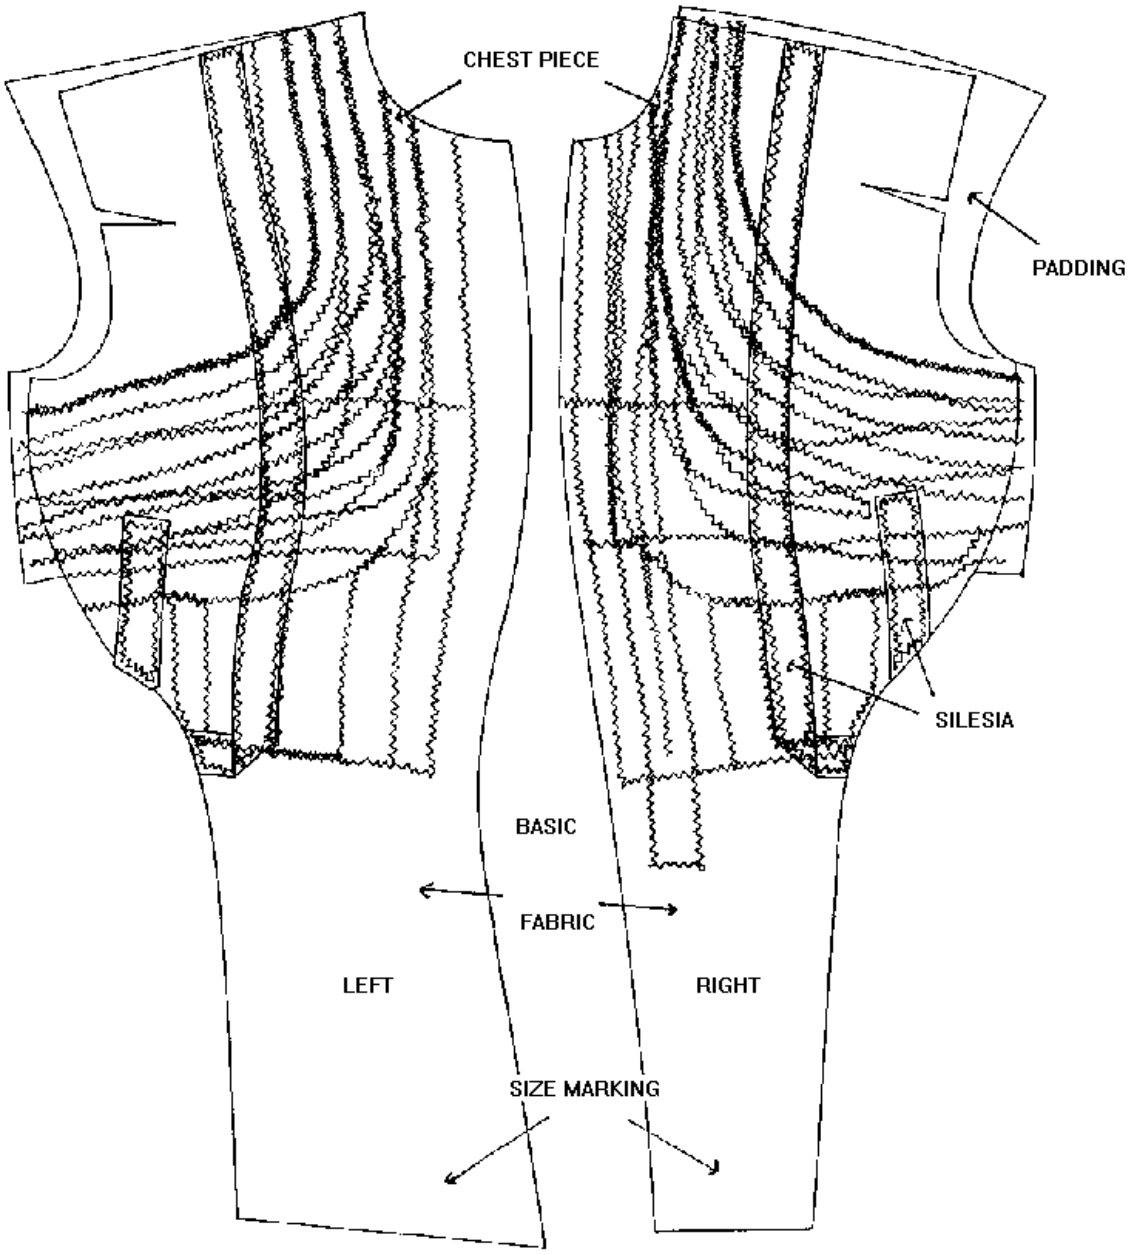


Figure 2. Coat Front - For Coat, Woman's, Dress Blue (Ceremonial) (Class 2)
Coat Front - For Coat, Woman's, Full Dress (Musician) (Class 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

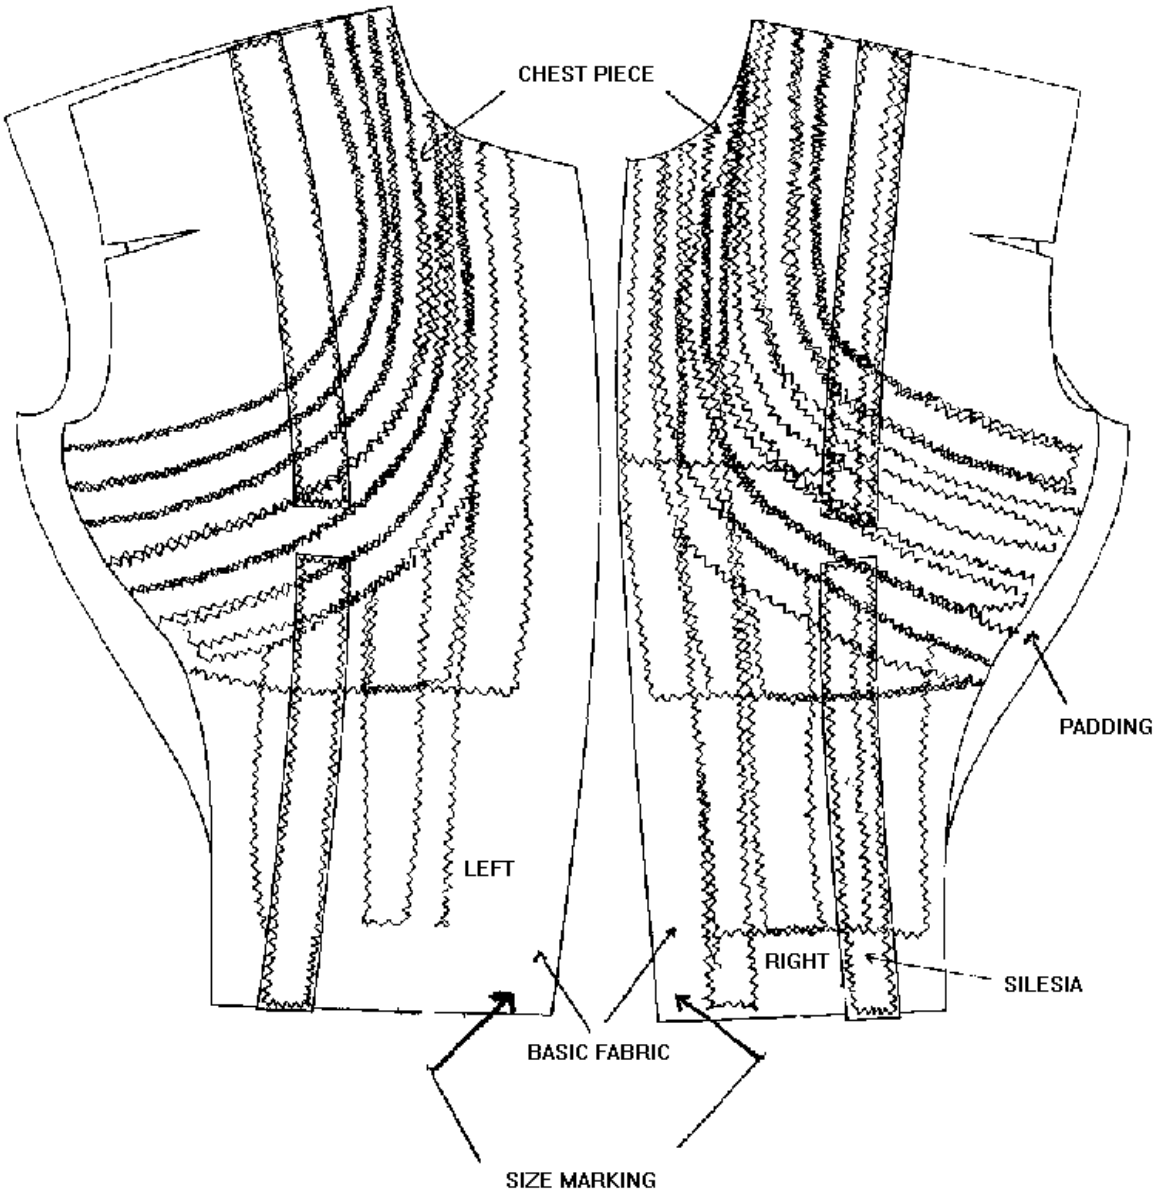


Figure 3. Coat Front - For Jacket, Woman's Full Dress and Jacket, Woman's Special Full Dress (Musician) (Class 5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-82114C(MC)	**2. DOCUMENT DATE (YYMMDD)** 971009

3. DOCUMENT TITLE COAT, MAN'S - FULL DRESS, SUMMER AND WINTER, SCARLET U.S. MARINE BAND, DRUM MAJOR

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME COMMANDER, MARCORSYSCOM, PSE-D	b. TELEPHONE *Include Area Code)* (1) Commercial (703)784-4584 (2) AUTOVON 278-4584
c. ADDRESS *(Include Zip Code)* 2033 BARNETT AVE, SUITE 315 QUANTICO, VA 22134-5010	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.