MIL-T-52440B(ME)
25 September 1980
SUPERSEDING
MIL-T-52440A(ME)
2 December 1975

MILITARY SPECIFICATION

TRAINING AID, COORDINATE INDICATOR, MAP READING

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a coordinate point indicator used for training purposes.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
TT-E-527	- Enamel, Alkyd, Lustreless.
LLL-B-810	- Building Board (Hardboard) Hard Pressed, Vegetable Fiber.

FSC 6910

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS20426	- Rivet, Solid, Countersunk 100°, Precision Head, Aluminum and Aluminum Alloy.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 366 - Steel, Carbon, Cold-Rolled Sheet, Commercial Quality.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The indicator shall be as shown in Figure 1 and as specified herein.

3.2 Material. Material shall be as specified herein (see 6.3).

3.2.1 Building board. The indicator sheet shall be building board conforming to LLL-B-810, Type I, Surface 2, Finish B, Design c, 1/8 inch thick.

3.2.2 Steel. The hangers shall be steel strips conforming to ASTM A 366, 0.0359 inch (20 gage) thick, 0.50 inch wide, 1.25 inches long.

3.3 Fabrication. The indicator shall consist of one sheet and two hangers assembled as shown in Figure 1 using rivets conforming to MS20426A2-4.

3.4 Treatment and painting. The indicator shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A, Color No. 37875.

3.5 Marking. The indicator shall be marked as shown in Figure 1 with lustreless enamel conforming to TT-E-527, Composition G, Color No. 37038.

3.6 Workmanship. The indicator shall have smooth edges and surfaces and shall be painted in a smooth and continuous manner.

3.6.1 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, and concentric with the surface of the member.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined for the defects specified in 4.4.1. AQL shall be 2.5 percent defective.

4.4 Inspection procedure.

4.4.1 Examination. The indicator shall be examined as specified herein for the following major defects:

101. Materials not as specified.
102. Parts or components not as specified, missing, or damaged.
103. Dimensions not as specified.
104. Treatment and painting not as specified.
105. Marking missing, incomplete, or illegible.
106. Workmanship not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107.	Materials, methods, and containers not as specified for Level A or B. Each incorrect material, method, or container shall constitute one defect.
108.	Consolidation not as specified for Level A.
109.	Gross weight of size exceeds the limitations of the box specification for Level A.
110.	Strapping not as specified for Level A.
111.	Marking missing, illegible, incorrect, or incomplete.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each indicator shall be preserved in accordance with MIL-P-116, Method IC-1 or IC-3.

5.1.1.1 Consolidation. The preserved indicators shall be consolidated together in a close-fitting box conforming to PPP-B-636, W5c or W6c, style optional, in quantities not to exceed the weight limitation of the box specification.

5.1.2 Commercial. Indicators shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B or Commercial as specified (see 6.2).

5.2.1 Level A. Indicators preserved as specified in 5.1 shall be packed in a close-fitting box conforming to PPP-B-601, Overseas Type, Grade B, style optional, in quantities not to exceed the weight limitations of the box. The strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable; and, unless otherwise specified herein, shall be Finish B. When specified (see 6.2), strapping shall be Finish A.

5.2.2 Level B. Indicators preserved as specified in 5.1 shall be packed in close-fitting boxes conforming to PPP-B-636, V3c, style optional or PPP-B-640, Class 2, style optional. The gross weight or size shall not exceed the limitation of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial. Indicators preserved as specified in 5.1 shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The indicator is a component of a map reading set and is intended to be used to show the location of a coordinate point. The set is used as an aid in teaching basic map reading.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Degree of preservation and degree of packing required (see 5.1 and 5.2).
(c) When strapping shall be Finish A (see 5.2.1).


6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6910-A391

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

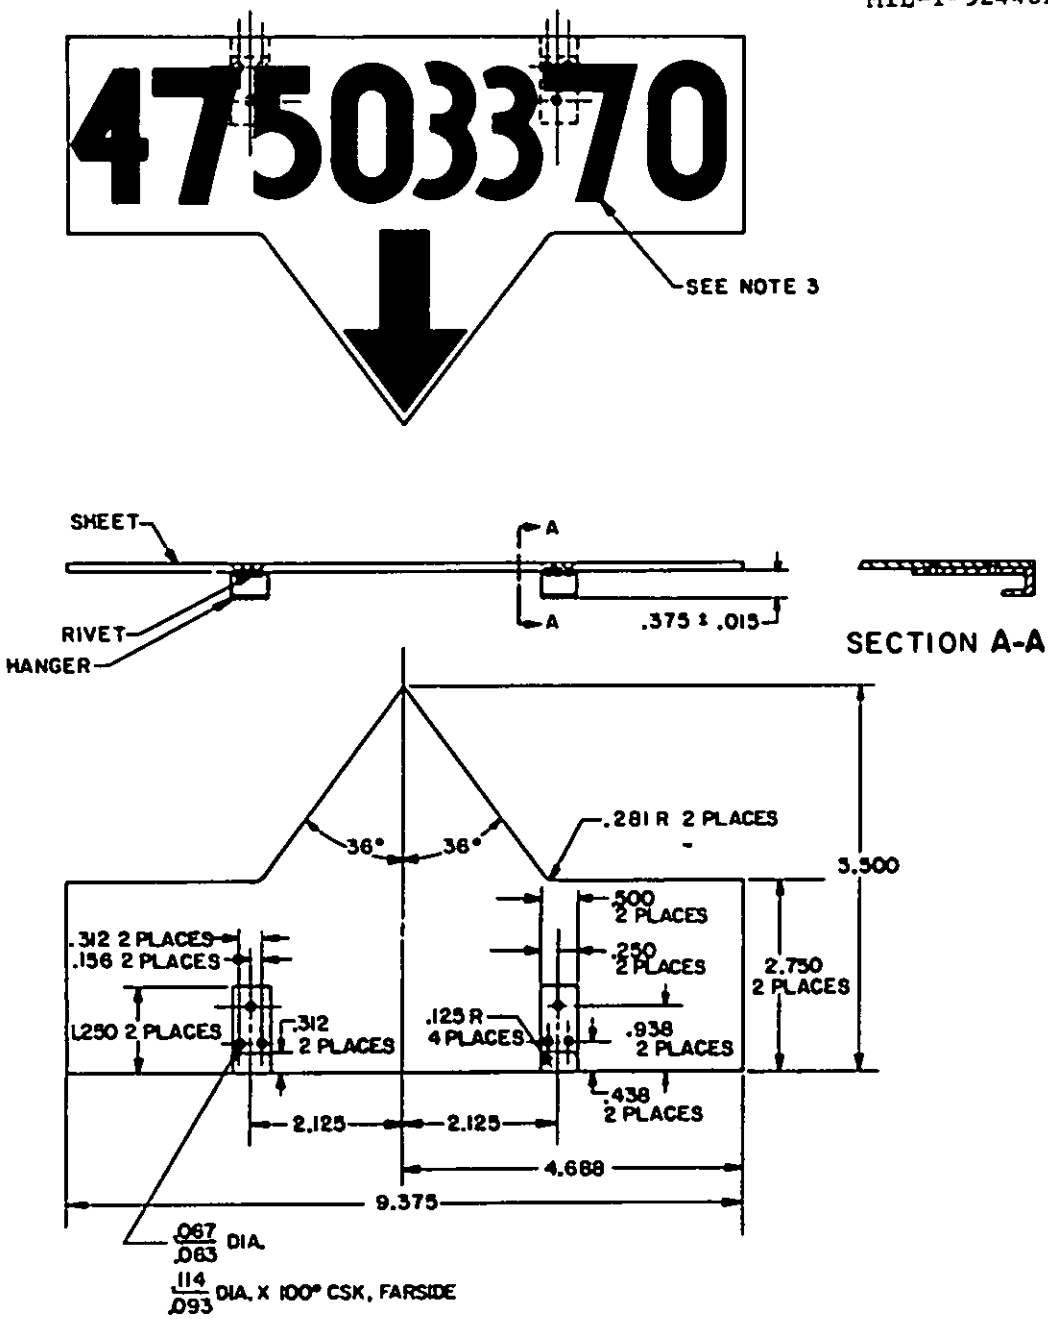

NOTES:

1. ALL DIMENSIONS IN INCHES
2. UNSPECIFIED TOLERANCE: DECIMALS ± .031, ANGLES ± 0° 30'
3. ALL MARKINGS TO BE APPROXIMATELY POSITIONED AND PROPORTIONED AS SHOWN

FIGURE 1. Indicator coordinate.

X-3032

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DES
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-52440B(ME) Training Aid, Coordinate Indicator, Map Reading

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.