MIL-C-21709E(NU)
9 February 1984
SUPERSEDING
MIL-C-21709D(SA)
31 August 1977

MILITARY SPECIFICATION
CAP, COLD WEATHER, PERMEABLE

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a cold weather, water and wind resistant cap constructed of a cotton/nylon sateen outer fabric and lined with knitted nylon fleece.

1.2 Classification. The cap shall be of one type only and in the following sizes (see 6.2):

Sizes

Small	(6-5/8 to 6-3/4)	Large	(7-1/8 to 7-1/4)
Medium	(6-7/8 to 7)	Extra Large	(7-3/8 to 7-1/2)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
CCC-C-419	- Cloth, Cotton, Duck, Unbleached, Plied - Yarns
	Army and Numbered
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-3530	- Thread and Twine; Mildew Resistant or Water Repellent Treated
MIL-C-17155	- Cloth, Knitted, Nylon, Fleece
MIL-B-17757	- Boxes, Shipping, Fiberboard, (Modular Sizes)
MIL-T-43548	- Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-C-43191	- Cloth, Wind Resistant Sateen, Cotton and Nylon

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402).

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Attn: Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample caps for first article inspection and approval (see 6.2 and 4.3).

3.3 Materials.

3.3.1 Basic material. The basic material shall be sateen, cotton/nylon, flurocarbon type water repellent treated, conforming to Class 2 of MIL-C-43191, except that the requirements for infrared reflectance shall not apply. The color of the material shall be OG-107.

3.3.2 Lining. The lining shall be knitted nylon fleece conforming to type I of MIL-C-17155.

3.3.3 Duck. The duck for interfacing the visor shall be cotton, plied-yarns, unbleached conforming to type I, hard texture, number 1 or 6 of CCC-C-419.

3.3.4 Binding. The binding for the visor shall be made from the basic material specified in 3.3.1. The binding shall be bias-cut and shall be 1 1/2 ($\pm$ 1/16) inches wide.

3.3.5 Thread. The thread for seaming and stitching shall be polyester-covered conforming to ticket numbers 30 and 50, 3 ply of MIL-T-43548. As an alternate, a cotton thread conforming to type 1A3, 3 ply, ticket numbers 30 and 50 of V-T-276 may be used. The thread shall be water repellent treated conforming to type II, class 3 of MIL-T-3530. The color of the thread shall be Olive Drab S-1, C.A. 66022.

3.3.5.1 Colorfastness. The dyed thread shall show fastness to laundering equal to or better than the standard sample when tested as specified in MIL-T-43548 or V-T-276. When no standard sample is available, the dyed thread shall show a minimum of "good" fastness to laundering when tested as specified in MIL-T-43548 or V-T-276.

3.3.6 Labels.

3.3.6.1 Identification/instruction label. Each cap shall have a combination identification/instruction label conforming to type VI, class 15 of DDD-L-20. The printing shall show fastness to laundering and shall bear the following inscription:

CAP, COLD WEATHER, PERMEABLE
FIBER CONTENT: SHELL - 50% Cotton/50% Nylon
LINING - 100% Nylon
CONTRACT NO.: DLA-100-00-0-0000 (Example)
NAME OF CONTRACTOR:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

CLEANING INSTRUCTIONS

1. Wash cap in hot water (120° to 140°F) using detergent.
2. Rinse thoroughly 2 or 3 times in hot water. Tumble dry.
3. DO NOT DRY CLEAN.

3.3.6.2 Size label. Each cap shall have a size label conforming to Type VI, class 2 of DDD-L-20. The label shall bear the following inscription:

SIZE: M (6 7/8 - 7) (Example)
STOCK NO: 8415-00-000-000 (Example)

3.4 Description. The cap is made of water repellent and wind resistant cotton/nylon sateen fabric lined with knitted nylon fleece. The cap shall be a ski-type style with a multi-stitched visor and a retractable extension flap for protecting the ears (see figure 1).

3.4.1 Figure. Figure 1 is furnished for information purposes only. Any inconsistencies between the specification and the figure, the specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/4 (± 1/16) inch for all seams, except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts. The component parts for the cap shall be cut from the material as specified, and in accordance with the pattern parts required for the manufacturing process as follows:

Materials	Nomenclature of pattern parts	Cut parts
Cloth, cotton/nylon, sateen	Crown top	1
	Crown side	2
	Extension flap	1
	Visor	2
Cloth, knitted, nylon fleece	Crown top	1
	Crown side	2
	Extension flap	1
Cloth, cotton, duck	Visor interfacing	
	#6 - Duck	2
	or	
	#1 - Duck	1

3.6 Construction.

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:21Z
Check the source to verify that this is the current version before use.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. When stitch type 401 is used, the looper (underthread) shall be on the inside of cap. Unless otherwise specified, topstitching, raisestitching and edgestitching shall be 1/16 inch from the folded edge. Whenever two or more methods of seaming or stitch types are given for the same part of the operation, any one may be used. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats, or open seams will result.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type.

3.7 Manufacturing operations requirements. The cap shall be manufactured in accordance with the operations shown in Table I. The contractor is not required to follow the exact sequence of operations provided that the finished cap is identical to that produced by following the sequence as listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. The cap shall be cut in strict accordance with patterns furnished, which show size, directional lines for cutting, and notches for proper assembly of component parts. b. Cut all component parts from one piece of material except lining extension flap which may be cut from ends and when so cut shall closely approximate the shade of main assembly. c. The dull side (filling flush side) of the sateen and the fleece side of the lining shall be the face side of the fabric.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 of this specification shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking a. Mark, ticket or bundle all component parts, except lining extension flap, to assure a uniform shade and proper size assembly throughout cap. b. The use of non-corrosive metal fastening devices for shade or size marking is permitted on the fleece only. c. Sewn on shade or size tickets are prohibited.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Shade and size marking (cont'd)					
	d. Adhesive type tickets which discolor or adhere to the material upon removal of tickets are prohibited.					
	e. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable, provided the numbers are legible and do not show on the outside of cap and whenever possible the numbers shall be on the seam allowance.					
4.	Join sateen crown side pieces and top.					
	a. Join sateen crown side pieces at center front and center back face to face (dull side), 1/4 inch from the edge; turn and raisestitch with right side, as worn, over the left.	301 or 401 and 301	LSq-2	10-12	30/3 30/3 30	30/3 50 30
*	b. Join sateen crown side pieces to crown top pieces as indicated by notches on pattern, face to face (dull side), 1/4 inch from the edge; turn and raisestitch with sides, as worn, over the crown.	101 or 301 or 401 and 301	LSq-2	10-12	30 30 30 30	 30 50 30
5.	Join lining crown side pieces and top.					
	a. Join lining crown side pieces at center front and center back; face to face (fleece side), 1/4 inch from the edge.	301 or 401	SSa-1	10-12	30 30	30 50
	b. Center and stitch the four sides of the identification/instruction label to the fleece side of the center back seam joining the lining crown side pieces.	301	LSbj-1	10-12	30	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Join lining crown side pieces and top (cont'd)					
	c. Center and stitch the four sides of the size label to the fleece side of the crown top piece. The top of the label shall be towards the back of the cap.	301	LSBj-1	10-12	30	30
	d. Join 1/4 inch from the edge lining crown side pieces to crown top piece as indicated by notches on pattern, face to face (fleece side), with center front and center back seams spread open. Leave an opening of approximately 5 inches for turning, between center back seam and center front seam.	301 or 401	SSa-1	6-8	30 30	30 50
6.	Make extension flap.					
	a. Stitch darts on sateen and the fleece extension flaps face to face, 1/4 inch from edge, starting at open end of dart, decreasing the seam allowance to the point.	301	SSa-1	10-12	30	30
	b. Finished darts shall measure 1 3/4 (± 1/4) inches long.					
	c. Fold under top edge of fleece extension flap to form a 1/2 (± 1/8) inch hem and stitch 1/8 inch from raw edge.	301 or 401	EFa-1	10-12	30 30	30 50
	d. Join 1/4 inch from the edge, face to face, the two plies of material with each dart seam spread open and corresponding. The top edge of the sateen shall extend approximately 3/4 inch beyond fleece at each end. Turn to finished position and edgestitch 3/16 inch from the edge.	301 or 401 and 301	SSe-2	10-12	30 30 30	30 50 30

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Make extension flap (cont'd)					
	e. Stitch pre-hemmed edge of fleece to sateen, 1/8 inch from the edge.	301	LSd-1	10-12	30	30
7.	Make visor.					
	a. Join two plies of Number 6 duck interfacing with 3 or 4 equally spaced parallel rows of stitching between the inner and outer edge. Care shall be taken to have stitched plies lay smooth and flat.	301 or 401	SSv-3 or 4	8-10	30 30	30 50
	or					
	b. Use one ply of number 1 duck interfacing and omit operation 7.a.					
*	c. Place interfacing (from 7.a or 7.b above) between two sateen visor pieces and stitch 1/8 inch from outer edge of visor.	101 or 301	SSa-1	6-12	30	30
	d. Quilt visor with nine rows of stitching through all plies of material 1/4 (± 1/16) inch apart, with the design properly centered on visor. The first row of stitching shall be 1/2 (± 1/16) inch from the outer edge of finished visor.	301	SSv-9	10-12	30	30
	e. Bind outer edge of visor. NOTE: No splicing shall be permitted on the binding.	301	BSc-1	10-12	30	30
	f. The finished binding shall measure 3/8 (± 1/16) inch wide.					
*	g. Stitch inner edge of two plies of sateen visor not more than 1/16 inch from inner edge of duck interfacing. Stitching shall not be caught in the duck interfacing. Notch seam at center of visor.	101 or 301 or 401	SSa-1	6-12	30 30 30	 30 50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil - Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Join visor and extension flap.					
	a. Match notch on visor with center front seam of crown side pieces and stitch the inner edge of sateen visor to lower edge of sateen crown side pieces with the row of stitching superimposed over the stitching enclosing inner edge of visor.	301 or 401	SSa-1	10-12	30 30	30 50
	b. Center and join the extension flap to lower edge of sateen crown across back with the ends of flap overlapping visor.	301 or 401	SSa-1	10-12	30 30	30 50
	c. Join 3/8 inch from the edge and stitch lower edge of lining crown side piece to sateen side piece around entire cap with the row of stitching superimposed over the stitching enclosing edge of visor.	301 or 401	SSa-1	10-12	30 30	30 50
	d. Turn cap to finished position.					
	e. Stitch 1/8 inch from the edge, the opening from operation 5.c by folding the raw edges to the inside.	301	SSc-1	10-12	30	30
9.	Cleaning.					
	a. Trim and remove all ends of thread.					
	b. Remove all spots and stains.					
	c. Remove all shade tickets.					

Source: https://assist.dla.mil -- Downloaded: 2026-01-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Blocking. a. Steam cap with flap folded inside on correct size and shape block. Cap shall be dried before removal from block. b. Corresponding cap and block size shall be as follows: Cap size / Block size Small (6-5/8 - 6-3/4) — 6-3/4 Medium (6-7/8 - 7) — 7 Large (7-1/8 - 7/1/4) — 7-1/4 X-Large (7-3/8 - 7-1/2) — 7-1/2					

Source: https://assist.dla.mil -- Downloaded: 20264O-19T10:21Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. The sizes and measurements of the finished cap shall be in accordance with Table II. Measurements and tolerances are in inches.

Table II - Sizes and measurements

Sizes	Circum-ference	Depth of visor	Depth of crown (front side)	Depth of crown (back) side and extension flap (combined)
Small (6-5/8 - 6-3/4)	21-1/4	2-3/4	2-1/16	6-3/8
Medium (6-7/8 - 7)	22	2-3/4	2-1/4	6-3/4
Large (7-1/8 - 7-1/4)	22-3/4	2-3/4	2-7/16	7-1/8
X-Large (7-3/8 - 7-1/2)	23-1/2	2-3/4	2-5/8	7-1/2
Tolerance	+ 3/8 - none	± 1/4	± 1/8	± 1/4

Circumference - Measurement shall be taken at bottom of crown with the extension flap inside. Measuring device shall not be placed into cap deeper than 3/4 inch.

Depth of visor - Measurement shall be taken from the bound outer edge of visor to the bottom of seam joining crown sides at center front.

Depth of crown (front) side - Measurement shall be taken from the inner edge of visor to the top of seam joining crown sides at center front.

Depth of crown (back) side and extension flap (combined) - Measurement shall be taken from the top of seam joining crown sides at center back to bottom edge of extension flap.

3.9 Workmanship. The finished caps shall conform to the quality established by this specification. The occurence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality conformance inspection (see 4.4)

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1, above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1, 4.4.2.2 and 4.4.2.3. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.4. The sample unit shall be one finished cap. The lot size shall be expressed in units of caps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

op for which the M-basis value is desired. For panels of material fabricated to the material specificati

4.4.2.1 Visual examination. The caps shall be examined for defects in color, design, material, construction, workmanship and marking and defects classified in accordance with the list below:

General defects	Major	Minor
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole, needle chew, cut or tear	X	
b. Any weakening defect such as a smash, float, or slub	X	
c. Any mend or burn		X
d. Any bare spot in fleece lining	X	
e. Not material specified	X	
SHADED PARTS		
Any part badly shaded: - sateen or fleece except fleece extension flap		X
CLEANNESS		
a. Any spot or stain on outside		X
b. Thread ends not trimmed or loose thread not removed (on major portion of seam)		X
c. Two or more shade or size markings not removed		X
d. Any marking exposed or readily visible on outside of cap		X
COMPONENTS AND ASSEMBLY		
a. Any component part or operation omitted (unless otherwise classified herein)	X	
b. Any component not as specified	X	
c. Any component part tight, twisted, distorted, pleated or full (unless otherwise classified herein)		X
d. Any operation not as specified	X	
CUTTING		
Any component part not cut in accordance with directional lines indicated on patterns or not in accordance with specification requirements	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

General defects (cont'd)	Major	Minor
SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Seams twisted, puckered or pleated (unless otherwise classified herein)		X
2. Part of cap caught in any unrelated operation or stitching	X	
3. Ends of seams or stitchings when not caught in other seams or stitchings backtacked less than 3/8 inch	X	
4. Stitching overlapping ends of thread break less than 1/2 inch		X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch		X
b. Gauge of stitching (edge or raised stitching)		
1. Gauge irregular or not within range specified (to be scored only when condition exists on more than 1/2 the length of seam)		X
2. Edge or raised stitching sewn too close to edge, resulting in damage to cloth.	X	
3. Seam allowance not as specified or varies more than 1/16 inch when no range is specified		X
c. Open seam or runoff		
1. Seam joining visor and extension flap to sateen crown side pieces:		
- less than and up to 1/4 inch		X
- more than 1/4 inch	X	
2. All other seams:		
- 1/8 inch but no more than 3/4 inch		X
- more than 3/4 inch	X	
NOTE: One or more broken or two or more continuous skipped or runoff stitches constitutes an open seam.		
d. Raw edge		
1. On outside:		
- up to 1/2 inch inclusive		X
- more than 1/2 inch	X	
2. On inside:		
- more than 1 inch		X
e. Seam and stitch types		
1. Not specified seam or stitch type		X
2. Looper thread of 401 stitch type on outside	X	
3. Any line of stitching omitted	X	
4. Any line of stitching not beginning or ending where specified		X

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:21Z
Check the source to verify that this is the currentversion before use.

General defects (cont'd)	Major	Minor
SEAMS AND STITCHING (cont'd)		
f. Stitch tension		
1. Loose tension resulting in a loose seam	X	
2. Loose tension on edge or raised stitching resulting in loosely exposed loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied to the seam or stitching)	X	
g. Stitches per inch (to be scored only when the condition exists on major portion of a seam)		
1. One stitch less than minimum specified except on label and #6 duck		X
2. Two or more stitches less than the minimum specified except on label and #6 duck	X	
3. Any number of stitches in excess of maximum specified		X
4. On label and #6 duck:		
- one or more stitches less than the minimum specified		X
h. Stitches skipped or broken		
On edge or raised stitching, when seam is seamed, turned and stitched or visor quilting stitching:		
- 1/4 inch or more	X	
i. Runoff		
1. On joining seams, when resulting in an open seam, score as "open seam"		
2. On raised or top stitching when not resulting in an open seam (outside only)		
- more than 1/2 inch		X

4.4.2.2 Detailed defects.	Major	Minor
BINDING		
a. Not securely caught in fabric causing binding to pull easily away from fabric	X	
b. Puckered or twisted at joining to visor		X
c. Spliced		X
d. Finished width not as specified	X	
E. Other than bias-cut	X	
CROWN (sides and top)		
a. Other than 3-piece crown	X	
b. Fleece lining:		
- reversed	X	
- tight, short or twisted causing fullness or twist on the outside		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Detailed defects	Major	Minor
DARTS		
a. Any dart omitted, incomplete, or misplaced		X
b. Not constructed as specified		X
EXTENSION FLAP		
a. Off center from back seam:		
- 1/4 inch or more but less than 1/2 inch		X
- 1/2 inch or more	X	
b. Badly twisted		X
c. Finished fleece hem less than 3/8 inch or more than 5/8 inch wide		X
LABELS		
a. Misplaced		X
b. Not stitched on all four sides		X
c. Missing, incorrect or illegible	X	
VISOR		
a. Off center:		
- 1/4 inch or more but less than 1/2 inch		X
- 1/2 inch or more	X	
b. Quilted with less than 9 rows of stitching		X
c. One ply of #6 interfacing (when applicable)	X	
d. Quilted stitching less than 3/16 inch or more than 5/16 inch apart		X
e. Upper part of visor puckered, twisted or pleated by quilting stitching		X
f. Inner and outer edges not stitched prior to joining to crown side pieces and binding		X
g. Interfacing caught in stitching enclosing inner edge of visor		X

4.4.2.3 Dimensional examination. Any measurement deviating from the nominal dimensions and tolerances specified in Table II shall be scored as a measurement defect.

4.4.2.4 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units, for visual and dimensional examination shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

	AQL's	Inspection level
For examination in 4.4.2.1 and 4.4.2.2		
Major	2.5	II
Total (Major and Minor combined)	15.0	II
For examination in 4.4.2.3		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Material	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, bulging or distortion of containers.
Content	Number of caps per container is more or less than specified.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each cap shall be neatly folded in half by bringing the back portion of the crown toward the front of the cap.

5.1.2 Level C. Caps shall be packaged to afford adequate protection against corrosion and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:21Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Thirty-six (36) caps, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 2A of MIL-B-17757. The liner shall be type CF, class weather-resistant, in accordance with the requirements specified in MIL-B-17757. Level A packages shall be packed flat, nine in length, two in width and two in depth within the shipping container, with the caps peaks facing the bottom of the box. Each end of the pack shall be filled with crumpled paper to hold the caps in place. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Thirty-six (36) caps, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The liner shall be type CF, class domestic in accordance with the requirements specified in MIL-B-17757. Level A packages shall be packed flat, nine in length, two in width, and two in depth within the shipping container, with the cap peaks facing the bottom of the box. Each end of the pack shall be filled with crumpled paper to hold the caps in place. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Container shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:21Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The cap covered by this specification is intended to be worn in conjunction with the Jacket and Trousers, Cold Weather, Permeable.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Selection of applicable levels of packing and packaging (see 5.1 and 5.2).
*(d) When first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval of the first article.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Review Activity:
DLA - CT

Preparing activity:
Navy - NU

Project No. 8415-N326

Source: https://assist.dla.mil -- Downloaded: 202640-19T10:21Z
Check the source to verify that this is the current version before use.

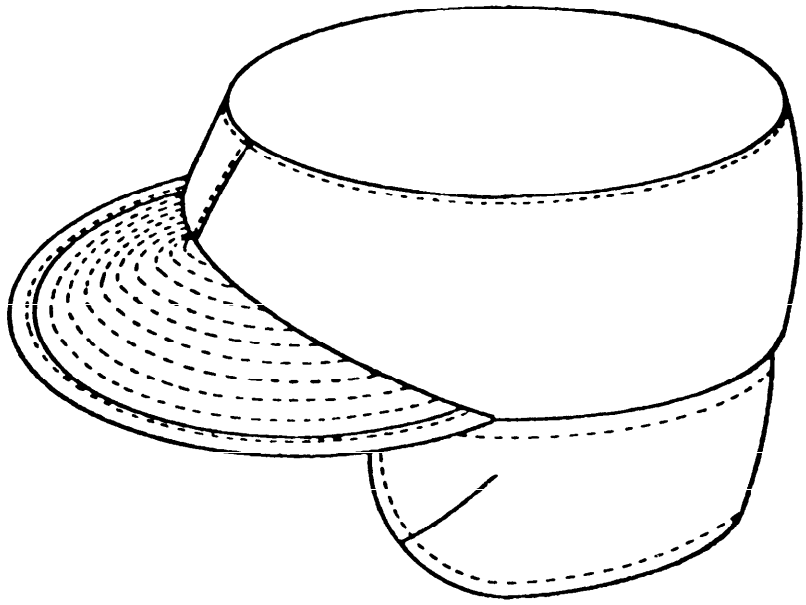


FIGURE 1 - CAP, COLD WEATHER, PERMEABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
ATTN: Code 50
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-21709E(NU)	CAP, COLD WEATHER, PERMEABLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.