INCH-POUND
MIL-H-21722B(AS)
30 September 1992
SUPERSEDING
MIL-H-21722A(AS)
25 APRIL 1969

MILITARY SPECIFICATION

HOOKS, THRUST AND STABILIZING, JATO 4500 POUNDS NOMINAL THRUST

This Specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the manufacture, inspection, and testing requirements for hooks, thrust and stabilizing, Jet Assisted Take-Off (JATO) 4500 pounds nominal thrust suspension system.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2b).

SPECIFICATIONS

FEDERAL

A-A-1898	Cushioning Material, Cellulosic, Packaging
L-P-378	Plastic, Sheet and Strip, Thin Gage, Polyolefin
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple-Wall

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Warfare Center Aircraft Division Lakehurst, Systems Requirements Department (Code SR3) Lakehurst, NJ 08733-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1680
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-P-116	Preservation, Methods of
MIL-L-10547	Liners, Case, and Sheet, Overwrap, Water Vaporproof or Waterproof, Flexible

STANDARDS

MILITARY

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-970	Standards and Specifications, Order of Precedence for the Selection of

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

NAVAIR 67A301D1	Fixture, Test, Vibrations, Life, Release Function
NAVAIR 67A302D2	Fixture, Test, Static, Repeat Load
NAF 603894	Hook, Thrust, JATO, Retractable
NAF 603922	Hook, Stabilizing, JATO, Retractable

(Unless otherwise indicated, copies of drawings are available from the Naval Air Technical Services Facility (NATSF) (Code 3121), 700 Robbins Avenue, Philadelphia, PA 19111-5097.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of documents cited in the solicitation (see 6.2b).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 117	Method of Salt Spray (Fog) Testing

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

Source: https://assist.dla.mil - Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 First Article. When specified (see 6.2c), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.3.

3.1.1 Manufacturing. The thrust hooks shall be manufactured in accordance with NAF Drawing 603894. The stabilizer hooks shall be manufactured in accordance with NAF Drawing 603922.

3.1.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-970.

3.2 Materials. Materials shall conform to specifications, shall be as specified herein, and on the drawings. Materials which are not covered by specifications or standards shall be of the best commercial quality, the lightest practical weight, and entirely acceptable for the purpose intended.

3.2.1 AN or MIL standard parts. AN or MIL standard parts shall be used and shall be identified on the drawing by their part numbers. Commercial utility parts such as screws, bolts, nuts, and cotter pins, may be used, provided they possess acceptable properties and are replaceable by the AN or MIL standard parts without alteration, and provided the corresponding AN or MIL part numbers are referenced in the parts list and on the contractor's drawings. If there is no acceptable corresponding AN or MIL standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification.

* 3.3 Interchangeability of parts. All parts having the same manufacturer's part number shall be functionally and physically interchangeable with each other with respect to installation and performance. Changes in manufacturer's part number shall be governed by the drawing number requirements of MIL-STD-100.

3.4 Performance. The JATO hooks shall function when subjected to the tests specified in section 4.

3.5 Weight. The weight of the thrust hooks shall not exceed 4.0 pounds The weight of the stabilizer hooks shall not exceed 1.6 pounds.

3.6 Identification. Each hook shall be identified on the frame of the hook with the contract number and the contractor's code number. A method of marking shall be selected which will not affect the structural integrity or the performance of the hook and which cannot easily be removed.

3.7 Lubrication. Lubricant, Molykote G manufactured by the Alpha-Molykote Corporation, Stamford, Connecticut, or equivalent, shall be used. The hooks shall be lubricated as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

a. Prior to assembly of the thrust hook, apply a thin coat of the lubricant to the working surfaces of parts 603894-12 (keeper), 603894-11 (lever), 603894-20 (hook-plate), and 603894-3 (latch assembly). Also apply a thin coat of lubricant to the diameter of pins 603894-29, 603894-30, and 603894-31. After assembly, actuate the hook several times. This will spread the lubricant evenly and work it into the surfaces of the parts.

b. Prior to assembly of the stabilizing hooks, apply a thin coat of the lubricant on the work surfaces of 603922-3 (assembly), 603922-10 (sear), and 603922-4 (hook). Also apply a thin coat of lubricant on the diameter of pins 603922-7 and 603922-17. After assembly, actuate the hook several times. This will spread the lubricant evenly and work it into the surfaces of the parts.

c. After assembly, there will be no small gobs of lubricant clinging to the sides of the parts.

d. The use of the term working surfaces, as used herein, defines those surfaces of levers or parts which come into contact with other moving parts of the assembly.

3.8. Test fixtures.

3.8.1 Life test. The life test fixture and the hydraulic jettison system used in conducting the life test (see 4.6.4) shall be in accordance with NAVAIR Drawing 67A301D1. The test fixture shall be mounted on a level support capable of absorbing the jettison forces.

3.8.2 Vibration test. The test fixture used to perform the vibration test (see 4.6.3) shall be the same as that used for the life test. The vibration input monitoring location shall be as indicated in NAVAIR Drawing 67A301D1.

3.8.3 Static and repeat load test. The test fixture used to perform the static and repeat load test (see 4.6.5) shall be constructed in accordance with NAVAIR Drawing 67A302D2.

3.9 Workmanship. Any variation in uniformity of hooks, sharp edges, burrs, surface pits, inferior plating, or any other visible evidence of careless workmanship shall be cause for rejection.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

* 4.3 First article inspection. First article inspection shall consist of the examinations and tests described in section 4.6 in the order listed in table I.

* 4.3.1 First article samples. The first three thrust hooks and the first six stabilizer hooks produced under each contract and fabricated from production tools shall be first article test samples. The samples shall be representative of the construction, workmanship, components, and materials to be used during production. The hooks shall be plainly identified by securely attached, durable tags marked with the following information:

Sample submitted by (Name) (Date) for first article inspection in accordance with the requirements of MIL-H-21722B(AS) and NAF Drawing under contract number

Deviation from the standards of the first article sample shall be permitted only by the acquiring activity. Evidence of unauthorized change shall be cause for rejection. These samples shall be delivered, for inspection and testing, to the assigned test activity (see 6.5 and 6.3). Hooks shall be selected for testing in sets consisting of one thrust and two stabilizer hooks (see 6.2e and 6.2g).

4.3.2 Correction of defects. Any defects discovered during the inspection and testing of the first article test samples shall be corrected by the contractor. Such measures as may be found necessary to correct these defects shall likewise be incorporated in all subsequent hooks offered for acceptance under contract.

* 4.4 Quality conformance inspection. Quality conformance inspections shall consist of the following tests and examinations and as listed in the order in table III.

a. Examination of product (see 4.5.2).

b. Sampling inspection (see 4.4.1).

c. Magnetic particle inspection (see 4.7).

4.4.1 Sampling inspection. Samples shall be selected by the Government inspector at random, from each production lot, in accordance with table II. Samples shall be forwarded to the assigned test activity and tested in the order listed in table III (see 6.2e and 6.2g).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection. 1/

Title	Applicable paragraph	Set 1	Set 2	Set 3
Physical characteristics(disassembled)	4.6.1.1	X		
Physical characteristics (assembled)	4.6.1	X	X	X
Vibration	4.6.3	X		
Life test	4.6.4		X	X
Salt spray	4.6.2		X	
Static and repeat load tests	4.6.5		X	X
Destruction tests	4.6.6		X	X

1/ Hooks shall be selected for testing in sets consisting of one thrust and two stabilizer hooks.

TABLE II. Quality conformance samples.

Total no. of hooks 1/	No. of samples selected	
	Thrust	Stabilizer
99 or less	2	4
100 to 299	3	6
300 to 500	4	8

1/ When the lot size exceeds 500 hooks, the lot shall be subdivided into lots of 500 units and the selection for each subdivision shall be in accordance with the above table.

TABLE III. Quality conformance tests.

Title	Applicable paragraph	Set 1	Set 2	Set 3	Set 4
Physical characteristics (disassembled)	4.6.1.1	X			
Physical characteristics (assembled)	4.6.1	X	X	X	X
Life test	4.6.4		X	X	
Static and repeat load tests	4.6.5	X		X	
Destruction tests	4.6.6		X		X

4.5 Inspection of materials and examination.

* 4.5.1 Commercial materials. When materials are procured under commercially recognized non-Governmental specifications, such as SAE numbers, such specifications shall be complied with (see 6.3).

4.5.2 Examination of product. Each hook submitted for acceptance under contract shall be inspected visually, by the contractor, to ensure that it has been properly assembled and that the workmanship and the finishes are in accordance with the provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

4.6 Inspection methods.

4.6.1 Physical characteristics (assembled). The units submitted for this test shall be photographed to illustrate clearly appearance and general arrangement. The test samples shall be weighed and subjected to an envelope and mounting hole dimensional check. In addition, each assembled test sample shall be visually examined to ensure it has been lubricated, properly assembled, and the workmanship and finishes are in accordance with the applicable drawings. Sufficient care must be taken to prevent disturbance of the lubricant.

4.6.1.1 Physical characteristics (disassembled). For the first article and quality conformance tests, one each of the thrust and stabilizing hooks shall be disassembled and the parts inspected and tested to ensure that surface finish, plating, and hardness are in accordance with applicable drawings.

4.6.2 Salt spray test. A salt spray test shall be made on set no. 2 in accordance with ASTM B 117 after completion of 400 cycles of the life test (see 4.6.4). The length of the salt spray test shall be 50 hours. At the end of the test period the hooks shall be inspected, photographed, and manually operated. The performance of the hook during manual operation shall be noted. Salt deposits resulting from the exposure conditions shall be removed by rinsing with tapwater. Without disassembling, the working surfaces (see 3.7.d) of the hooks shall then be lubricated and the life test continued to 500 cycles.

4.6.3 Vibration test. A vibration test shall be performed on the JATO hooks using the test fixture shown on NAVAIR Drawing 67A3010l. An expended 225 pound JATO bottle or a 225 pound mock JATO bottle shall be installed on the test fixture. The JATO hooks shall be vibrated for a period of twenty-five (25) hours as follows:

a. Vibration input frequency, 33 +0, -5 cycles per second (CPS).

b. Vibration input amplitude, 0.032 inch at 33 CPS.

c. Direction of vibration shall be vertical.

The vibration input amplitude shall be measured at the point of inherent rigidity as indicated in NAVAIR Drawing 67A3010l. Should undue resonance generated by either the test set-up or the JATO bottle occur at 33 CPS, reduce the input frequency to eliminate the resonance and adjust the displacement to produce the same G level. The test duration shall then be adjusted to produce an equivalent number of cycles of vibration based on 33 CPS for 25 hours. Fracture of hook components or release of bottle during test period due to vibration, mechanical failure, or loosening of parts shall be considered cause for rejection of test hooks. Prior to and upon completion of the vibration test, the hooks shall be manually actuated three times to demonstrate satisfactory operation.

* 4.6.4 Life test. The life test shall be conducted at room temperature on the life test fixture shown on NAVAIR Drawing 67A3010l. The test shall be conducted as follows:

a. Attach a 225 pound expended JATO bottle or a mock bottle of equal weight to the JATO hooks.

b. Release the JATO bottle.

c. Repeat (a) and (b) for a total of 500 operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.


If the performance of the test hooks is unacceptable due to undue wear, mechanical failure, or loosening of parts, the test hooks shall be rejected.

4.6.4.1 Required force. The force required to release the JATO bottle shall not exceed the force obtained with the hydraulic jettison system illustrated on NAVAIR Drawing 67A301D1. The time required to jettison the bottle shall be in the range of 70 to 150 milliseconds.

4.6.5 Static and repeat load tests.


4.6.5.1 Static load tests. Static load tests shall be conducted at room temperature on the test fixture shown on NAVAIR Drawing 67A302D2. The test shall be conducted as follows.

4.6.5.1.1 Thrust hook (NAF Drawing 603894). Loads shall be applied as shown below:

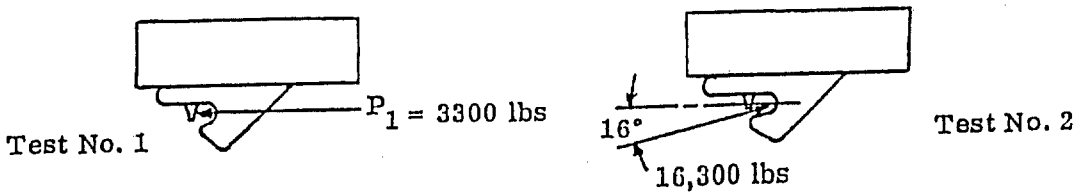

When subjected to the above tests, the thrust hook shall show no evidence of mechanical or material failure.

4.6.5.1.2 Stabilizing hook (NAF Drawing 603922). Loads shall be applied as shown below:

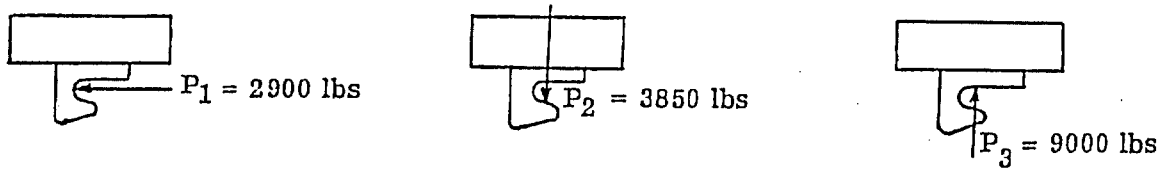


When subjected to the above tests, the stabilizing hook shall show no evidence of mechanical or material failure.

4.6.5.1.3 Completion of static load tests. Upon completion of the static load tests, the hooks shall be manually actuated three times to demonstrate satisfactory operation.

4.6.5.2 Repeat load tests. Repeat load tests shall be conducted at room temperature on the test fixture shown on NAVAIR Drawing 67A302D2. The tests shall be conducted as follows:


4.6.5.2.1 Thrust hook (NAF Drawing 603894). Loads shall be applied as shown below:

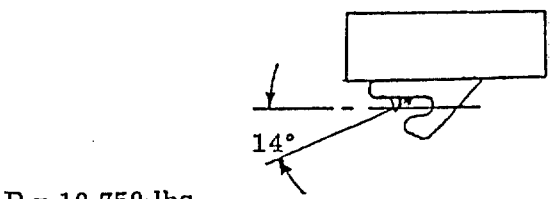

Source: https://assist.dla.mil Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

The repeat load tests are cycled from zero to the specified load and back to zero. There shall be no evidence of mechanical or material failure below 2000 cycles. Upon completion of the repeat load test, the hooks shall be manually actuated three times to demonstrate satisfactory operation.

4.6.5.2.2 Stabilizing hook (NAF Drawing 603922). Loads shall be applied as shown below:

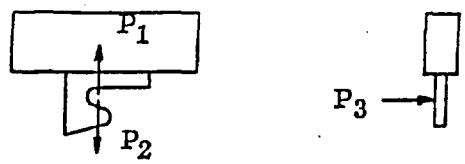

Condition	P_1	P_2	P_3
I	---	2100 lb	1200 lb
II	1700 lb	---	1200 lb

The repeat load tests are cycled from zero to the specified load and back to zero. There shall be no evidence of mechanical or material failure below 2000 cycles for Condition I and Condition II. Upon completion of the repeat load tests, the hooks shall be manually actuated three times to demonstrate satisfactory operation.

4.6.6 Destruction tests.

4.6.6.1 Static destruction tests.

a. Thrust hook (NAF Drawing 603894) - Loads shall be applied in the same manner as indicated in 4.6.5.1.1. Failure to restrain the load shall not occur below values of P_1 = 4000 lbs and P_2 = 17,000 lbs.

b. Stabilizing hook (NAF Drawing 603922) - Loads shall be applied in the same manner as indicated in 4.6.5.1.2. Failure to restrain the load shall not occur below values of P_2 = 5200 lbs and P_3 = 9450 lbs.

4.6.6.2 Repeat load destruction tests.

a. Thrust hook (NAF Drawing 603894) - Magnitude and direction of the load shall be as shown in 4.6.5.2.1. Failure to restrain the load shall not occur below 5,000 cycles for first article testing, 2,500 cycles for quality conformance testing but shall be continued to 5,000 cycles or failure, whichever occurs first, for reliability purposes.

b. Stabilizing hook (NAF Drawing 603922) - Magnitude and direction of the loads shall be as shown in 4.6.5.2.2. Failure to restrain the load shall not occur below 5,000 cycles in Condition I for first article testing, 2,500 cycles for quality conformance testing but shall be continued to 5,000 cycles or failure, whichever occurs first, for reliability purposes.

4.7 Magnetic particle inspection. After machining and prior to plating, magnetic particle inspection shall be performed on parts as indicated on

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

drawings (see 6.3).

4.8 Rejection. The failure of any sample hook to pass the quality conformance inspections and tests outlined in 4.4 shall be cause for rejection of all hooks represented by that sample, subject to retests.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified by the acquiring activity (see 6.2f).

* 5.1.1 Level A. Each thrust or stabilizing hook shall be individually preserved in accordance with MIL-P-116, Method III. The hook shall be placed within a transparent film bag of 0.0015 inch minimum gauge and heat sealed. The bag material shall conform to L-P-378 or the commercial equivalent. Each bagged hook shall be adequately cushioned, material conforming to A-A-1898, and enclosed within an individual close fitting fiberboard box conforming to PPP-B-636, Style OPF, Class Domestic, Grade 125; closure shall be accomplished in accordance with applicable procedures in the appendix.

5.1.2 Level C. Each hook shall be preserved in a manner that will prevent deterioration and damage during transit from the supply source to the first receiving activity. The contractor's commercial practice may be utilized when it conforms to the criteria stated herein.

5.2 Packing. Packing shall be level A, B, or C as specified by the acquiring activity (see 6.2f). Insofar as practicable, shipping containers shall effect a close fit, contain identical quantities, and be of uniform dimensional configuration.

5.2.1 Level A. Hooks, preserved as specified in 5.1.1, shall be packed for shipment in fiberboard containers conforming to PPP-B-636, Class Weather resistant, Grade V3s/V3c or PPP-B-640, Class 2, Style A. Each container shall be fitted with a waterproof liner conforming to MIL-L-10547. The gross weight of each packed container shall not exceed 70 pounds for the PPP-B-636 container nor 150 pounds for the PPP-B-640 container. The closure, sealing, and reinforcing (banding) of the containers shall be accomplished in accordance with the procedure specified in the appendix of the applicable container specification.

5.2.2 Level B. Hooks, preserved as specified in 5.1.1, shall be packed for shipment in fiberboard containers conforming to PPP-B-636, Class Domestic, Grade 275 or PPP-B-640, Class 1, Style A or B. The gross weight of each packed container shall not exceed 90 pounds for the PPP-B-636 containers nor 200 pounds for PPP-B-640 containers. The closure and reinforcing (banding) of the containers shall be accomplished in accordance with the procedure specified in the appendix of the applicable container specification.

5.2.3 Level C. Hooks, preserved as specified in 5.1.2, shall be packed for shipment in a manner that will afford protection against damage during

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

transit from the supply source to the first receiving activity. The pack shall, as a minimum, comply with the rules and regulations applicable to the mode of transportation utilized.

5.3 Marking. Each unit and shipping container shall be marked in accordance with MIL-STD-129. In addition, the following marking shall be required on unit packs:

Specification MIL-H-21722B(AS)
Contract/Order No.
NSN 1680-00-697-3216-Thrust Hook {as applicable}
NSN 1680-00-697-3217-Stabilizing Hook

6. NOTES

* (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The stabilizing and thrust hooks covered by this specification are intended for use on certain aircraft to attach the JATO bottles.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

c. Whether first article is required (see 3.1).

d. Whether first article inspection is waived (see 6.4).

e. Name and address of the inspection laboratory.

f. Applicable levels of preservation (see 5.1), packing (see 5.2), and marking requirements (see 5.3).

g. Samples subjected to first article or quality conformance tests shall not be considered or shipped as part of the contract or order.

h. Items of data required (see 6.3).

* 6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
4.3.1	DI-NDTI-80809A	Test/inspection reports	----
4.3.1, 4.5.1 4.7	DI-MISC-80678	Certification/ data report	----

The above DID's were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

* 6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the hooks should be a preproduction sample, a first article sample, a first production item, or a standard production item from the contractor's current inventory, and the number of items to be tested as specified in 4.3.1. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first article. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Assigned test activity. The assigned test activity is the activity designated by the acquiring activity to conduct the first article and quality conformance sampling inspections listed herein.

* 6.6 Subject term (key word) listing.

Aircraft take-off
Bottle
Load
Magnetic particle inspection
Material failure
Vibration

* 6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS

(Project 1340-N870)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-H-21722B(AS)	92/09/30

3. DOCUMENT TITLE: HOOKS, THRUST AND STABILIZING, JATO 4500 POUNDS NOMINAL THRUST

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
COMMANDING OFFICER, NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION LAKEHURST SYSTEMS REQUIREMENTS DEPARTMENT	(908) 323-7488	624-7488
c. ADDRESS (Include Zip Code) CODE SR3 LAKEHURST, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19 10:23Z
Check the source to verify that this is the current version before use.