MILITARY SPECIFICATION

TROUSERS, EXTREME COLD WEATHER, IMPERMEABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a waterproof, insulated cold weather trouser constructed of a coated nylon twill, lined with a knitted nylon fleece.

1.2 Classification The trousers shall be of one type only and in the following sizes (see 6.2):

Schedule of Sizes

Small (27-30)	Large (35-38)	XX-Large (43-46)
Medium (31-34)	X-Large (39-42)	

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

V-B-871 - Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106 - Fasteners, Slide, Interlocking

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

V-T-280 - Thread, Cotton, Gimp, Buttonhole
V-T-295 - Thread, Nylon
DDD-L-20 - Label; For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-371 - Braid, Textile (Cotton, Tubular)
MIL-E-480 - Enamel, Baking, Phenol or Urea-Formaldehyde
MIL-W-530 - Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors
MIL-B-543 - Buckles, Tongueless and Web Strap
MIL-C-17155 - Cloth, Knitted, Nylon, Fleece
MIL-B-17757 - Boxes; Shipping, Fiberboard (Modular Sizes)
MIL-C-19759 - Cloth, Coated, Nylon Twill, Low Count

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

*MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
*MIL-STD-147 - Palletized Unit Loads
*MIL-STD-1488 - Provisions for Evaluating Quality of Trousers

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Traffic Department, 1616 P Street, N.W. Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the samples, in which case this specification shall govern.

3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials

3.3.1 Basic material The basic material shall be chloroprene coated nylon twill cloth conforming to type I of MIL-C-19759.

3.3.1.1 Binding The material for binding the waist edge, front edge of fly extension (right side), and leg bottoms shall be made from the basic material specified in 3.3.1, bias-cut in strips of 1 1/4 (± 1/8) inches wide. The ends of the strips shall be joined by seam type SSa-1 and stitch type 301 with 10 to 12 stitches per inch. The seams shall finish 1/8 to 3/16 inch wide and shall be spread open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

3.3.2 Lining The lining material shall be knitted nylon fleece conforming to type I of MIL-C-17155.

3.3.3 Thread, nylon The thread for seaming and stitching shall be types I and II, thread size B and E or type III, thread size B and E, conforming to V-T-295. Either type III may be used for the needle and bobbin or a combination of type II for the needle and type I for the bobbin may be used. The shade of the thread shall be Olive Drab, S-1, C.A. 66022.

3.3.3.1 Colorfastness The dyed thread shall show colorfastness to laundering and wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-295. When no standard sample is available, the dyed thread shall show a minimum of "good" colorfastness to laundering and wet-dry cleaning when tested as specified in V-T-295.

3.3.4 Gimp The gimp for reinforcing the buttonholes shall be thread, cotton gimp, buttonhole, conforming to type I or II, size No. 8 of V-T-280. The shade shall be Olive Drab, S-1, C.A. 66022.

3.3.4.1 Colorfastness The dyed gimp shall show colorfastness to laundering and wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show a minimum of "good" colorfastness to laundering and wet-dry cleaning when tested as specified in V-T-280.

3.3.5 Button, plastic The button for the front, and patch pocket (right leg and hip) closure shall be 30-line, conforming to type II, class D, style 20 and 21 with stud of V-B-871. The button shall have a glossy finish and the color shall be Olive Green BP, Cable No. 62016.

3.3.6 Slide fastener The slide fastener for the fly closure shall be interlocking, conforming to type I, style 3, size M, long tab pull, brass or bronze chain, of V-F-106. All components of the slide fastener shall be from the same supplier (see 4.4.1).

3.3.6.1 Tape for slide fastener The tape for the slide fastener shall be cotton or synthetic or a combination. The tape shall approximate the shade of the basic material and show good fastenss to laundering and wet-dry cleaning as specified in V-F-106.

3.3.6.2 Length of slide fasteners The length of the slide fasteners shall be as follows:

Sizes	Inches (+ 1/4 inch)
Small (27-30)	8
Medium (31-34) - Large (35-38)	9
X-Large (39-42) - XX-Large (43-46)	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

3.3.7 Buckle The buckle for the leg adjustment (take-up) straps shall conform to type II, style 4, class 1, construction A or B, size 3/4 inch of MIL-B-543, except that the buckle shall have a baked-on enamel finish conforming to type I or II of MIL-E-480 (see 4.4.1). The color shall approximate the shade of the basic material.

3.3.8 Webbing The material for the leg adjustment (take-up) straps shall be cotton, conforming to type IIa, class 3, 3/4 inch wide of MIL-W-530. The color shall be Olive Green 107.

3.3.9 Suspender loops (braid) The braid for the suspender loops shall be cotton, tubular, conforming to type V, class 1 of MIl-B-371, except that the colorfastness requirements specified therein shall not apply. The color shall be Olive Green 107.

3.3.10 Labels Each trouser shall have a combination identification and instruction label and a size label, conforming to DDD-L-20, except that the printed surface of the labels shall be impregnated or surface coated with finishing compound after printing. The printing shall show fastness to laundering and wet-dry cleaning.

3.3.10.1 Combination label Each trouser shall have a combination identification/ instruction label conforming to type V1, class 15 of DDD-L-20, and shall bear the following inscription:

TROUSERS, EXTREME COLD WEATHER, IMPERMEABLE
BASIC FABRIC: 100% NYLON
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
CONTRACTORS NAME:

1. This trouser, made of coated material, will provide protection against cold and cold/wet windy conditions when exposed for long periods under low activity levels (i.e., watchstanders).
2. Close leg adjustments (take-up) straps to eliminate drafts. Open to ventilate.

Cleaning Trousers should be laundered with water temperature below 140°F (60°C) and tumble dried below 160°F (71°C).

3.3.10.2 Size label Each trouser shall have a size label conforming to type VI, class 2 of DDD-L-20, and shall bear the following inscription:

SIZE: MEDIUM (31-34) (EXAMPLE)
STOCK NUMBER: 8415-00-000-0000 (EXAMPLE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

3.3.11 Adhesive shade or size tickets Adhesive tickets, when used for shade or size marking, shall be of paper with a thermo-activated or pressure-sensitive adhesive applied on one side. The adhesive shall not discolor the material and the adhesive mass shall not adhere to the material upon removal of the tickets.

3.4 Design The trousers shall be bound at the waist, front edge of fly extension (right side), and at each leg bottom. The trouser has a welt and bellows type pocket located at the thigh on the right outseam and a welt type hip pocket on left back, each with a buttoned flap; a slide fastener and buttoned fly closure; six belt loops, side suspender loops and a high back riser horizontally quilted. The braid side loops are provided for use with Suspenders, Trousers, M-1950, stock number 8440-000-221-0852. Each leg shall have an adjustment (take-up) strap assembly located across the outseam near the bottom of the trousers (see Figures 1 and 2).

3.4.1 Figures The figures are furnished for information purposes only. To the extent of any inconsistencies between the specification and the figures, the specification shall govern.

3.5 Patterns Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/2 inch for all double lapped and double needled seams, except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts The component parts shall be cut from material as specified and in accordance with the following list of pattern parts:

Material	Nomenclature of pattern parts	Cut parts
Cloth, coated, nylon twill, low count	Front	2
	Back	2
	Fly, facing (left side)	1
	Fly, extension (right side)	2
	Bottom leg lining extension	2
	Right leg, bellows, patch pocket	1
	Bellows, patch pocket welt	1
	Bellows, patch pocket flap	1
	Back patch pocket and welt (left side)	1
	Back patch pocket flap	1
	Back waist interlining	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of pattern parts	Cut parts
Cloth, knitted nylon fleece	Front	2
	Back	2
Template	Belt loops	-
	Leg adjustment (take-up assembly)	-

3.6 Construction

3.6.1 Stitches, seams, and stitching Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods of seams or stitches are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the trousers. Double needle stitching shall be 1/4 to 5/16 inch gauge with the outer row of stitching 1/16 to 1/8 inch from folded edge. Unless otherwise specified, topstitching and edgestitching shall be 1/16 to 1/8 inch from folded edge. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings.

3.6.2 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.3 Thread breaks and ends of seams Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type.

3.7 Manufacturing operations requirements The trouser shall be manufactured in accordance with all operations shown in Table I. The contractor is not required to follow the exact sequence of operations as listed, provided the finished trouser is identical with that produced by following the exact sequence shown in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of Trousers

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. The trousers shall be cut in strict accordance with patterns furnished, which shall show size, placement of notches, perforations, directional lines for cutting, and instructions for the proper assembly of all component parts. b. Directional lines on the fronts and backs may vary from the warp direction by not more than 2 1/2 inches Measurements shall be taken at top and bottom edges of the pattern from the directional line to the selvage edge (on the even side of lay) of the fabric and the difference between the two measurements shall not exceed 2 1/2 inches. c. The uncoated side of the coated nylon twill and the fleece side of the lining shall be the face side of the fabric. d. Cut all component parts of the coated nylon twill from one piece of material, except for the left fly facing and right fly extension, back waist interlining, binding, belt loops, bellows patch pocket welt, and bottom leg lining extension pieces which may be cut from ends and when so cut shall approximate the shade of the main assembly.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting (cont'd) e. Cut coated nylon twill stripping as follows: -for binding (see 3.3.1.1) -for knee stay 1/2 inch (± 1/8) inch wide by 2 1/4 (± 1/2) inches long. -for belt loops (see operation 12). f. Cut all component parts of the fleece from one piece of material.					
2.	Replacement of damaged parts During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade marking a. All parts shall be marked, ticketed, or bundled to insure uniform shade, size, and proper assembly throughout the trousers, except those parts cut from ends. b. The use of metal fastening devices or sewn-on tickets for shade marking is permitted for the knitted nylon fleece only. c. Adhesive type shade or size tickets, when used, shall conform to the requirements specified in 3.3.11.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Shade marking (cont'd) d. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers do not show through the outside of the trousers and whenever possible, numbers shall be covered by the seam allowance.					
4.	Prepare right leg (bellows) and left back hip patch pockets a. Finished appearance - The flap, welt and hem of each pocket, as applicable, shall be uniform in shape and size and shall finish without any twist, pleat or pucker. Pockets may be precreased prior to setting.					
	b. Fold, coated side face up, the right leg and left back hip patch pocket flap in half lengthwise. Stitch 1/4 to 3/8 inch from edge, the side edges. Trim corners, turn to finished position, work out points and edgestitch, continuing the stitching across the folded edge.	301	SSe-2 and OSf-1	8-12	IIIB or IIB	IIIB IB
	c. Stitch buttonhole(s) in each flap (see operations 14.b and e).					
	d. Form a hem on the left back hip patch pocket as indicated by notches on pattern and stitch 1/16 to 1/8 inch along the fold and raw edge.	301	EFa-2	8-12	IIIB or IIB	IIIB IB

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Prepare right leg (bellows) and left back hip patch pockets (cont'd)					
	e. Turn back top edge of left back hip pocket as indicated by notches on pattern. Stitch 1/16 inch across the folded edge forming a 1 (± 1/8) inch welt terminating the stitching approximately 3/8 inch at each end to facilitate creasing side edges of the pocket.	301	OSf-1 (excep four plies)	8-12	IIIB or IIB	IIIB IB
	f. Stitch, 1/4 inch from edge, one edge of the welt piece (uncoated side) to the top (wider) edge of the right leg patch pocket (coated side) simultaneously forming a pleat (bellows) as indicated by notches on pattern. Turn welt piece to finished position and stitch 1/16 inch from folded edge, the top and bottom edges.	301	BSg-2 and OSf-1	8-12	IIIB or IIB	IIIB IB
	g. Form and tack a pleat (bellows) at the opposite edge of the right leg patch pocket as indicated by notches on pattern.	301	SSa-1	8-12	IIIB or IIB	IIIB IB
	OR					
	h. As an alternate, form and tack a pleat (bellows) at wider and opposite edge of the right leg patch pocket as indicated by notches on pattern. Fold the welt piece in half lengthwise, turn in raw edges to the underside and stitch 1/16 inch from folded edge, the top and bottom edges with the top (wider) side of the pocket inserted and caught between the plies.	301	SSa-1 and LSe-1 and	8-12	IIIB or IIB	IIIB IB

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Prepare right leg (bellows) and left back hip patch pockets (cont'd) i. The finished welt piece shall measure 1 1/4 (± 1/8) inches wide.					
5.	Join twill back darts and left hip pocket a. Finished appearance - The darts shall be carefully tapered to avoid unsightly bulging. The bottom ends of the darts shall be securely tacked with the left dart extending into the flap.					
	b. Stitch the cut out dart in each back section as indicated by marks on pattern, from 3/8 inch at the waist edge tapering to a point at the bottom end. Turn and raise stitch, 1/16 inch from folded edge, with the seam allowance turned towards the center back.	301	LSq-2	8-12	IIIB or IIB	IIIB IB
	c. Set and stitch, 1/8 inch (3.17mm) from edge, the raw edge of the pocket flap to the left back section as indicated by marks on pattern with the folded edge facing the waist.	301 or 401	LSs-2(a)	8-12	IIIB or IIB	IIIB IB
	d. Fold under 5/16 to 3/8 inch and stitch 1/16 to 1/8 inch from folded edge, through all plies of material, the side (excluding the welt piece) and bottom edges of the pocket piece. The stitching forming the welt shall be 5/8 (± 1/8) inch below the flap raw edge.	301	LSd-1	8-12	IIIB or IIB	IIIB IB

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Join twill back darts and left hip pocket (cont'd)					
	e. The finished pocket opening shall measure 6 1/4 (± 1/4) inches wide.					
	f. Turn upward, align and stitch the free ends of the welt piece to the underside of the flap to correspond with the edgestitching and finished side edges of the flap.	301	LSd-1	8-12	IIIB or IIB	IIIB IB
	g. Turn flap to finished position and topstitch 3/16 to 1/4 inch from folded edge, enclosing the raw edges.	301	LSs-2(b)	8-12	IIIB or	IIIB
	h. Bartack ends of pocket opening (see operation 13.b)					
6.	Stitch twill left and right flies and front crotch					
	a. Finished appearance - The fly shall be of even length at waist and crotch seam without any twist, bulge or pucker when slide fastener is closed. The top edge of the slide fastener tape shall be diagonally turned under with the fold 2 (± 1/8) inches below the bound waist edge. The ends of the chain shall be 1/4 to 1/2 inch above the fly notch.					
	b. Stitch, 1/16 to 1/8 inch from edge, the front raw edge of the fly facing (left side) to the face side of the left fleece fly edge, the length indicated by notch on pattern.	301 or 40	SSa-1	8-12	IIIB or IIB	IIIB IB

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Stitch twill left and right flies and front crotch (cont'd)					
	c. Fold under 3/8 inch and topstitch the back raw edge of the fly facing (left side), through fleece.	301 or 401	LSd-1	8-12	IIIB or IIB	IIIB IB
	d. Double stitch, 5/16 to 3/8 inch gauge, the left half of the slide fastener tape to the fly facing and fleece with the chain 3/4 to 1 inch in from the edge.	301	SSv-2	8-12	IIIE or IIE	IIIE IE
	e. Stitch, 3/16 to 1/4 inch from edge, face to face, the fleece left front to the twill left front at fly edge, the length indicated by notch on pattern. Turn to finished position and edgestitch 3/16 to 1/4 inch from folded edge.	301	SSe-2	8-12	IIIB or IIB	IIIB IB
	f. Stitch 3/8 inch from folded edge, the back turned edge of fly facing (left side), gradually curving to fly notch. The stitching shall be 1 5/8 (± 1/8) inches from front edge of fly.	301 or 401	SSv-1	8-12	IIIB or IIB	IIIB IB
	g. Stitch, 1/4 inch from edge, face side in, the fly extension (right side) pieces at the bottom edge. Turn face side out, and continue the stitching along the raw edges of the three remaining sides.	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	OR					
	As an alternate, front and bottom edges shall be stitched 1/4 inch from edge, turned and edgestitched.	301 or 401	SSe-2	8-12	IIIB or IIB	IIIB IB

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Stitch twill left and right flies and front crotch (cont'd)					
	h. Stitch buttonhole (see operation 14.c)					
	i. Stitch, 3/8 inch from edge, the right half of the slide fastener tape to the fly edge of the right front with top edge of the tape turned under and positioned to correspond with left half of slide fastener tape.	301	SSa-1	8-12	IIIE or IIE	IIIE IE
	j. Join, 3/8 inch from edge, the twill left and right fronts at crotch. Turn and raise stitch with the seam allowance on the underside of the left front.	301 or 401	LSq-3	8-12	IIIB or IIB	IIIB IB
	k. Join, 3/8 inch from edge, the assembled fly extension (right side) to the fly edge of the right front, the length indicated by the notch on pattern.	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	l. Join, 1/2 inch from edge, face to face, the fleece right front to the twill right front at the fly edge from top of waist to fly notch, continuing the stitching, face to face, the fleece fronts at crotch catching the prestitched assembled fly extension (right side). Slit notch at bottom of fly.	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	m. Turn back twill right front and fleece right front, laying fly extension piece flat and smooth and raise-stitch with seam allowance on the underside of twill right front fly edge.	301	SSq-2(b)	8-12	IIIE or IIE	IIIE IE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Stitch twill left and right flies and front crotch (cont'd)					
	n. Tack, approximately 2 inches from crotch seam, the bottom edge of the fly extension (right side) to the face side of the fleece left front with the fleece crotch seam spread open and flat on the under side.	301	LSa-1	8-12	IIIB or IIB	IIIB IB
7.	Join twill seat seam, outseams, right leg patch pocket and inseams					
	a. Finished appearance - Seams joining the seat seam, outseams and inseams shall be uniformly double stitched and carefully assembled to avoid any twist, pleat or pucker and finished evenly. The inseams shall be joined in one continuous operation with the crotch and seat seam junction staggered not more than 3/8 inch from center of seam to center of seam. The stay (knee) piece may be stitched before the outseam and inseam are joined.					
	b. The direction of joining seams shall be as follows: -fronts over backs at outseams and inseams -left back over right back at seat seam					
	c. Join, seat seam at center back with a double lapped and double stitched seam.	301 or 401	LSc-2	8-12	IIIB or IIB	IIIB IB
	d. Stitch, 1/8 to 3/16 inch from edge, the top edge of the interlining to the waist edge horizontally across the seat seam OR	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Join twill seat seam, outseams, right leg patch pocket and inseams (cont'd) As an alternate interlining may be stitched to the fleece assembly (see operation 8.b).					
	e. Join outseams, matching notches, with a double lapped and double stitched seam simultaneously inserting and catching one end of a base fabric stay piece at the knee.	301 or 401	LSc-2	8-12	IIIB or IIB	IIIB IB
	f. Center and stitch, 1/8 inch from edge, the raw edge of the assembled right leg patch pocket flap to right outseam as indicated by marks on pattern with the folded edge facing the waist.	301 or 401	LSs-2(a)	8-12	IIIB IIB	IIIB IB
	g. Position right leg patch pocket with the pleat (bellows) centered on the outseam and the welt piece overlapping the patch pocket flap on the underside approximately one inch. Fold under 5/16 to 3/8 inch and stitch 1/16 to 1/8 inch from folded edge, through all plies of twill, the side and bottom edges of the patch pocket, terminating the stitching approximately one inch below the top edge of the welt piece.	301	LSd-1	8-12	IIIB or IIB	IIIB IB
	h. The finished pocket opening shall measure 9 1/8 (± 1/4) inches wide.					
	i. Turn under and stitch 1/16 to 1/8 inch from folded edge, the free ends of welt piece set not more than 1/8 inch in from the finished edge of the flap.	301	LSd-1	8-12	IIIB or IIB	IIIB IB

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Join twill seat seam, outseams, right leg patch pocket and inseams (cont'd)					
	j. Turn flap to finished position and topstitch 3/16 to 1/4 inch from folded edge, enclosing the raw edges.	301	LSs-2(b)	8-12	IIIB or IIB	IIIB IB
	k. Bartack ends of pocket opening (see operation 13.b)					
	l. Join inseams, matching notches, with a double lapped and double stitched seam simultaneously inserting and catching one end of a base fabric stay piece at the knee. OR As an alternate, operations 7.c, 7.e, and 7.1 may be performed by using seam type LSq-3.	301 or 401	LSc-2	8-12	IIIB or IIB	IIIB IB
8.	Join fleece darts, seat seam, outseams, inseams, twill bottom leg lining, extension and label					
	a. Stitch the cut out dart in each back section as indicated by marks on pattern, from 3/8 inch at the waist edge tapering to a point at the bottom end.	301	SSa-1	8-12	IIIB or IIB	IIIB IB
	b. Stitch 1/2 inch from edge, the seat seam at center back (see operation 7.d).	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	c. Stitch the four sides of the combination label centered horizontally across the seat seam with the top edge of the label approximately 2 inches below the turned edge of the binding. The ends of the label stitching shall be overlapped with not less than 3 stitches.	301	LSbj-1	8-12	IIIB or IIB	IIIB IB

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Join fleece darts, seat seam, outseams, inseams, twill bottom leg lining extension and label (cont'd)					
	OR					
	As an alternate, stitch combination label with box tacker.	301	LSbj-1	8-12	IIIB or IIB	IIIB IB
	NOTE: The stay (knee) piece may be stitched after performing operations 8.d and 8.f.					
	d. Join, 1/2 inch from edge, matching notches the fleece outseams simultaneously superimposing and catching the free end of the base fabric stay piece at the knee.	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	e. Stitch, 3/8 inch from edge, face to face, the top edge of the bottom leg lining extension piece to the fleece side of the front and back sections. Turn and raisestitch with the seam allowance on the underside of the bottom leg lining extension piece.	301 or 401	LSq-2	8-12	IIIB or IIB	IIIB IB
	f. Join, 1/2 inch from edge, matching notches, the fleece inseams simultaneously superimposing and catching the free end of the base fabric stay piece at the knee and the ends of the bottom leg lining extension piece.	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	g. In operations 8.b, 8.d and 8.f, the seams shall be pressed open and flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Complete trouser assembly					
	a. Turn trouser to finished position. Stitch, 1/8 to 3/16 inch from edge, the two assemblies together at the waist edge, simultaneously matching seams and back darts and catching the ends of the suspender (braid) loops on the twill side of each back section, forming an opening of 2 1/4 (± 1/4) inches with one end of the loop adjacent to the outseam.	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	b. Stitch, 1/8 to 3/16 inch from edge, the two assemblies together at the leg opening edge.	301 or 401	SSa-1	8-12	IIIB or IIB	IIIB IB
	c. Stitch (quilt) riser at waist edge between the back darts with five horizontal rows of stitching through all plies of material. The top row of quilt stitching shall be spaced 1/4 (± 1/16) inch below the turned under edge of the binding and the remaining four rows shall be evenly spaced 1/4 to 5/16 inch apart.	301	SSv-5	8-12	IIIB or IIB	IIIB IB
	d. Stitch, 1/16 inch from folded edge, the top edge of the bottom leg lining extension piece through all plies of material.	301	SSv-1	8-12	IIIB or	IIIB
10.	Make and attach leg adjustment (take-up) strap assemblies					
	a. Finished appearance - The leg adjustment (take-up) strap assemblies shall be horizontally aligned on the outseam.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Make and attach leg adjustment (take-up) strap assemblies b. Thread, fold, position and stitch assemblies in accordance with operations 10.c and 10.d and figures 1 and 2. c. Turn under both ends of the short strap with the folded edge located on each front section in accordance with pattern template. d. Turn under unhemmed end of the long strap with the folded edge located on each back section in accordance with pattern template. e. The finished length of the leg adjustment strap assembly for all sizes shall be as follows: Short strap - 2 (± 1/4) inches Long strap - 8 3/4 (± 1/4) inches Short strap shall be measured from folded edge to fold over buckle bar. Long strap shall be measured from outer folded edge of hem to turn under.					
11.	Binding a. Finished appearance - The binding shall measure 3/8 (± 1/16) inch wide with the raw edges securely caught in the stitching. Not more than two splices shall be permitted.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11.	Binding (cont'd) b. Bind leg opening leaving an extension of approximately one inch at each inseam.	301	BSc-1	8-12	IIIB or IIB	IIIB IB
	c. Bind waist and right front fly in one continuous operation simultaneously inserting the size label in the stitching, positioned adjacent to the center back seam. Leave an extension of approximately one inch at the left front fly edge and bottom front edge of fly extension (right side).	301	BSc-1	8-12	IIIB or IIB	IIIB IB
	d. When alternate is used (see operation 6.g), the binding shall terminate at the top front edge of the fly extension (right side) leaving an extension of approximately 1 inch.					
12.	Make and attach belt loops a. Finished appearance - The six belt loops shall finish 5/8 to 3/4 inch wide and shall be located in accordance with pattern template.					
	b. Fold stripping (loop) in half lengthwise, face side out, turn under the raw edges parallel to the fold and stitch 1/16 to 1/8 inch from folded edge.	301 or 401	EFp-2	8-12	IIIB or IIB	IIIB IB
	OR					
	c. As an alternate; stitch 1/16 to 1/8 inch from folded edge, face side out, the two plies of stripping (loop) with the side raw edges turned in.	301 or	SSc-1 (each edge)	8-12 IIB	IIIB or IB	IIIB
		401	SSc-1 (each side)	8-12 IIB	IIIB or IB	IIIB

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Make and attach belt loops (cont'd)					
	d. Turn under and tack, 1/8 inch from folded edge, across the belt loops at the top and bottom ends through all plies of material. The distance between the tacking shall be not less than 2 inches nor more than 2 1/4 inches.	301	LSd-1	8-12	IIIB or IIB	IIIB IB
	OR					
	e. As an alternate; stitch a 3/4 (or two, 3/8) inch horizontal bartack as indicated above (see operation 13 b).					
13.	Bartack					
	a. Finished appearance - The bartacks shall be well made and correctly placed when used as the only means of attaching an assembly or to reinforce point of strain as specified.					
	b. Stitch a 3/8 to 1/2 inch bartack at the following locations:					
	-One at each end of right leg and hip patch pocket flap vertically aligned with the edgestitching at sides and extending not more than 1/8 inch beyond the raisestitching at top.	Bartack		28 per bartack	IIIB or IIB	IIIB IB
	-One at the base of fly at junction of the crotch and left fly stitching. The bartack may be diagonal in line with the left fly stitching or may be horizontal and shall extend across the crotch seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Bartack (cont'd) -One across the bound edge of left front waist (left front fly) and bottom or top front edge of fly extension (right side) with the extended end of the binding turned to the underside and caught in the bartack. -One (3/4 inch) or two (3/8 inch) across the width at top and bottom folded edge of loop. -One across the bound edge of leg opening with the extended end of the binding turned to the underside and caught in the bartack. -One at the top folded edge of the left half slide fastener tape; connecting the double row of stitching. -One at the top folded edge of the right half slide fastener tape, vertically aligned with the edge-stitching.	Bartack		28 per bartack	IIIB or	IIIB
14.	Make buttonholes a. Finished appearance - Buttonholes shall be 7/8 to 1 inch cut, of the eyelet end taper bar type, worked over gimp with the ends of the buttonhole stitching and gimp securely tacked. Buttonholes shall be clean cut, well made and correctly positioned. The stitching shall be securely caught in the fabric with the purling on the outside.					
	b. Stitch a vertical buttonhole in center of hip pocket flap 1/4 inch off tolerance allowed with the inside purled edge 1/2 (± 1/8) inch in from the edge.	Button hole		52-56 per buttonhol including tack	IIIB or IIB	IIIB IB

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Make buttonholes (cont'd)					
	c. Stitch a diagonal buttonhole in right front with the inside purled edge 3/8 (± 1/8) inch in from the turned edge of binding at the front and waist edge of fly extension (right side).	Button-hole		52-56 per buttonhole including tack	IIIB or IIB	IIIB IB
	d. Stitch a horizontal buttonhole in left front with inside purled edge 1/2 (± 1/8) inch in from fly edge and 3/4 (± 1/8) inch below the turned under edge of the binding at waist edge.	Button-hole		52-56 per buttonhole including tack	IIIB or IIB	IIIB IB
	e. Stitch a vertical buttonhole in each end of right leg patch pocket flap with the inside purled edge 1/2 (± 1/8) inch in from the folded edge and 1 1/4 (± 1/8) inches in from the side edge.	Button-hole		52-56 per buttonhole including tack	IIIB or IIB	IIIB IB
15.	Mark and sew buttons					
	a. Finished appearance - The buttons shall be properly aligned with buttonholes. Hand or machine sewn buttons shall have the thread ends hidden and securely tacked off with not less than two stitches.					
	b. Sew a 30-line button through the hip pocket hem to correspond with buttonhole in flap.	Hand		4 per button double thread	IIIB or IIB	
		or Machine		14-16 per button	IIIB or IIB	IIIB IB

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

Table I - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Mark and sew buttons (cont'd)					
	c. Sew a 30-line button through fly extension (right side) to correspond with buttonhole in left front fly.	Hand		4 per button double thread or 14-16 per button	IIIB or IIB	IIIB
		or Machine			IIIB or IIB	IIIB
	d. Sew a 30-line button on the inside of left front through all plies, to correspond with buttonhole in fly extension (right side).	Hand		4 per button double thread or 14-16 per button	IIIB or IIB	
		or Machine			IIIB or IIB	IIIB
	e. Sew two 30-line buttons on right leg patch pocket, through a base fabric reinforcement piece, to correspond with buttonholes in flap.	Hand		4 per button double thread or 14-16 per button	IIIB or IIB	IIIB
		or Machine			IIIB or IIB	IIIB
16.	Cleaning Trim all ends of stitching and remove all loose threads. Trim ends of belt loops, remove all spots and stains and all shade and size markings.					
17.	Examine, and close and pack trousers a. Examine trousers for correct labeling, assembly, material imperfections, workmanship damages, cleanness and dimensions.					
	b. Close front fly slide fastener and completely button waist and patch pockets.					
	c. Fold and pack trousers as specified in Section 5.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements The sizes and measurements of the finished trousers shall be in accordance with Table II. The measurements and tolerances are in inches. The measurements shall be taken as indicated below (see Figure I).

Table II - Sizes and Measurements of Trousers

Size	Waist (A)	Seat (B)	Inseam (C)
Small (27-30)	32 1/2	44	29
Medium (31-34)	35 1/2	47	29 1/2
Large (35-38)	39 1/2	51	29 1/2
X-Large (39-42)	43 1/2	55	29 1/2
XX-Large (43-46)	47 1/2	59	29 1/2
Tolerance	-1 + 1/2	-1 + 1/2	± 1/2

NOTE: Trousers shall be laid flat and smooth with the slide fastener and buttons of front fly completely closed.

(A) Waist - Double the measurement taken straight across the front of trousers from folded edge to folded edge at a point, on each side fold, located 1 inch below the top of trousers at center front.

(B) Seat - Double the measurement taken straight across the front of trousers from folded edge to folded edge at a point 1 inch above the trouser fly bartack.

(C) Inseam - The measurement shall be taken along the inseam from the junction of the front center seam and the inseams to the bottom of the trouser.

3.9 Workmanship The finished trousers shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection Sampling for inspection shall be performed in accordance with MIL-STD-1488, except where otherwise indicated.

4.4.1 Component and material inspection In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, the contractor shall furnish a certificate of compliance for the enamel finish for the buckle specified in 3.3.7. A certificate of compliance shall also be submitted stating that all components of the slide fastener are furnished from the same supplier.

4.4.2 Examination of the end item The end item examination provisions for finished trousers shall be as specified for utility ("U") trousers in MIL-STD-1488.

4.4.3 Packaging inspection Packaging inspection shall be in accordance with MIL-STD-1488.

4.5 Palletization examination An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defects
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging Preservation-packaging shall be level A or C (see 6.2).

5.1.1 Level A Each pair of trousers shall be folded as follows: (1) Close front fly. (2) Fold trousers in half lengthwise with the fly inside the fold. (3) Fold trousers in half by bringing the bottom up to the top of the garment. The approximate size of the folded garment shall be 14 1/2 inches by 23 inches.

5.1.2 Level C Trousers shall be packaged to afford adequate protection against corrosion and physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A,B or C as specified (see 6.2).

5.2.1 Level A Eight (8) pairs of trousers of one size only, packaged as specified in 5.1, shall be packaged in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather resistance, variety DW, grade V15c, size 3A of MIL-B-17757. The liner will be type CF, class weather resistance, in accordance with the requirements specified in MIL-B-17757. Level A packages shall be packed flat, one in length, one in width, and eight in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B Eight (8) pairs of trousers of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The liner will be type CF, class domestic, in accordance with the requirements specified in MIL-B-17757. Level B packages shall be packed flat, one in length, one in width and eight in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C Trousers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with US Posal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

5.3.1 Labels, mixed sizes Each shipping container packed with mixed sizes only shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these word shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.4 Palletization When specified (see 6.2), trousers, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or bonding means O. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use This insulated waterproof trouser is intended to be used in conjunction with other items of the Extreme Cold Weather Outfit in cold and wet/cold areas. It is especially suited for use by personnel exposed for lengthy periods under low activity levels (i.e., shipboard watchstanders).

6.2 Ordering data Procurment documents should specify the following:

a. Title, number and date of this specification.
b. Sizes required (see 1.2).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
d. When a first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instruction in acquisition documents regarding arrangement for examinations, quantity, and testing and approval of the first article.

*e. When palletization is required (see 5.4).

6.3 Samples and patterns For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU
User activity:
Navy - CG
Review: DLA-CT

Preparing activity:
Navy - NU
Project No. 8415-N318

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.



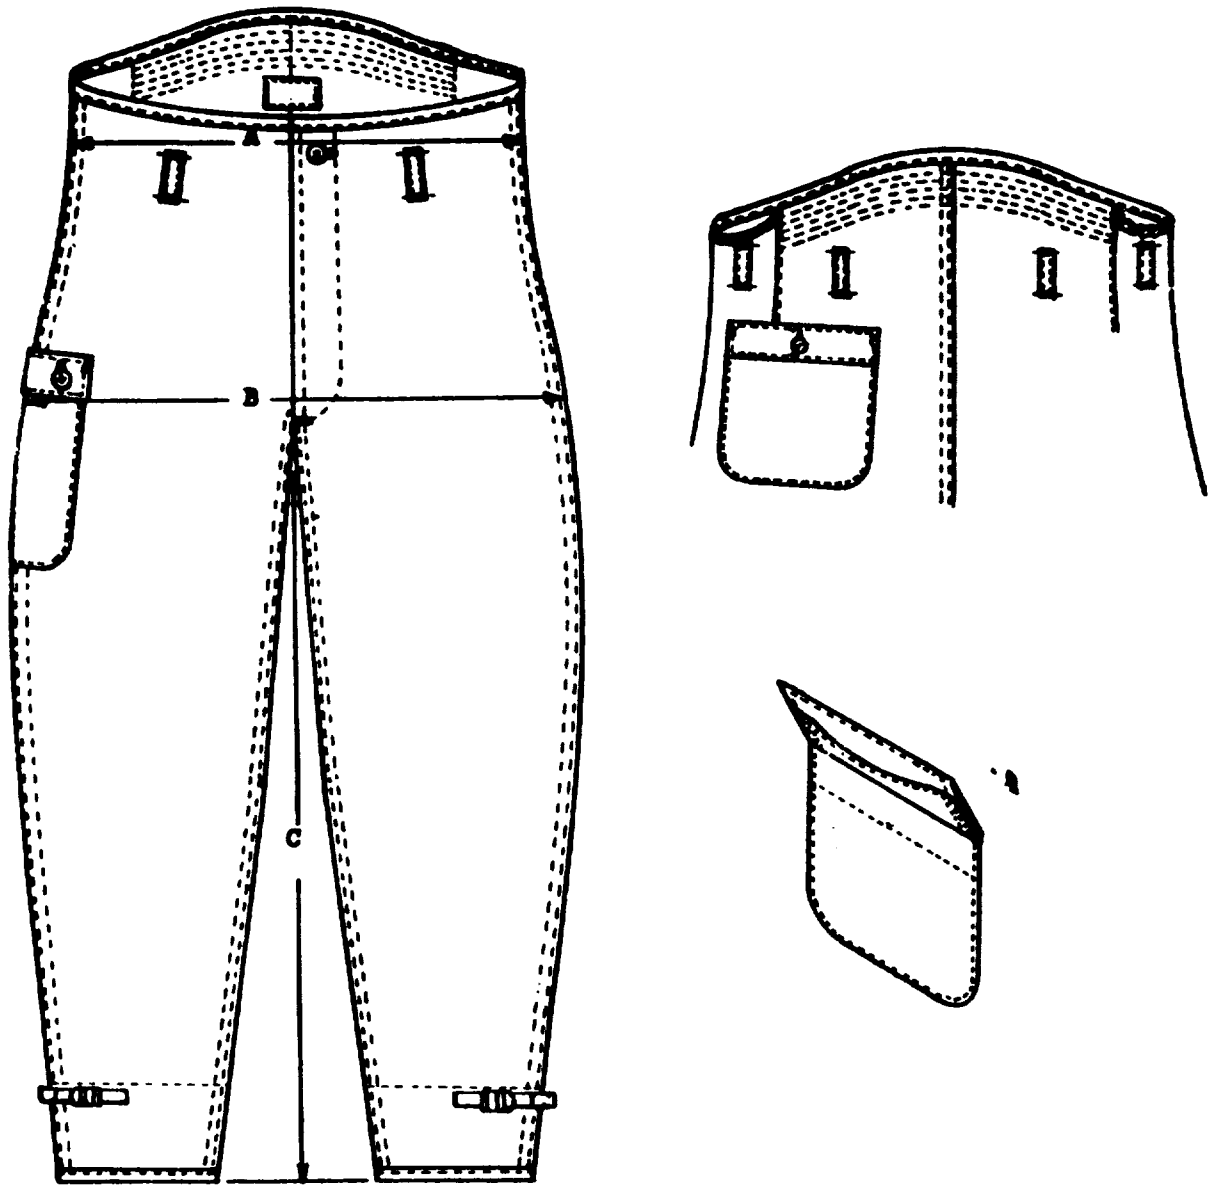


FIGURE 1 - TROUSERS, EXTREME COLD WEATHER, IMPERMEABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

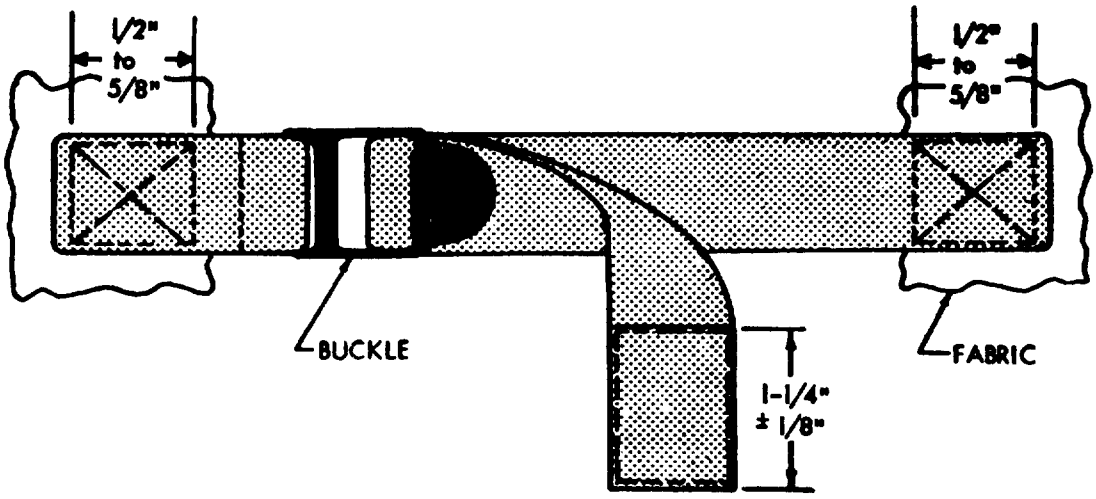

TOP VIEW

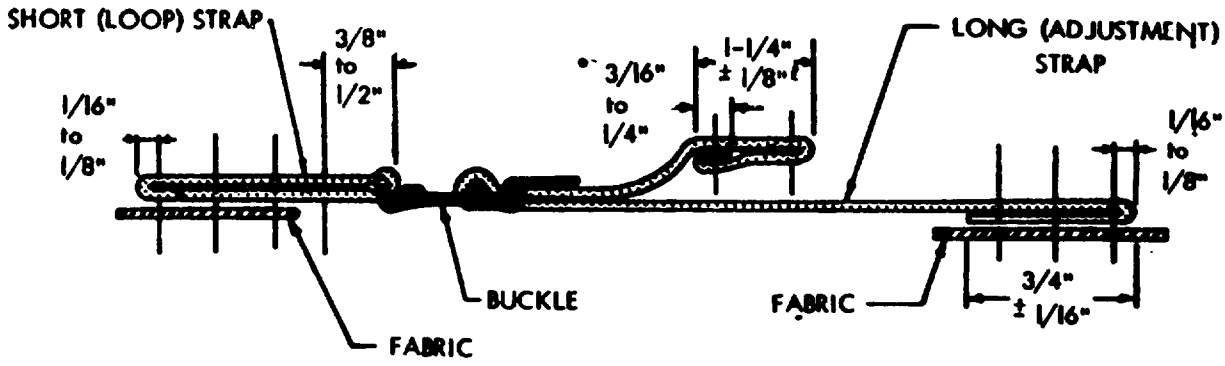

SIDE VIEW

FIGURE 2 - LEG ADJUSTMENT STRAP AND BUCKLE ASSEMBLY

☆U.S. GOVERNMENT PRINTING OFFICE: 1984—705-040/A2969

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road
ATTN: Code 50
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-21705E(NU)	TROUSERS, EXTREME COLD WEATHER, IMPEARMEABLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:21Z
Check the source to verify that this is the current version before use.