MIL-V-21701B
26 MARCH 1969
SUPERSEDING
MIL-V-21701A(ASG)
21 December 1964

MILITARY SPECIFICATION

VALVE, CHECK, OXYGEN MASK, INLET

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of oxygen mask inlet check valve.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

BB-A-1034	Air, Compressed, for Breathing Purposes
BB-N-411	Nitrogen
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-601	Box, Wood, Cleated-Plywood
PPP-B-636	Box, Fiberboard
PPP-B-676	Boxes, Setup

Military

MIL-P-116	Preservation, Methods of
MIL-M-6482	Mask Assemblies, Oxygen, Pressure Breathing
MIL-F-22191	Films, Transparent, Flexible, Heat Sealable, for Packaging Applications

FSC 1660

Source: https://assist.dla.mil -- Downloaded: 202640-19T10:20Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Military (Continued)

MIL-B-22205	Bag, Transparent, Flexible, Heat Sealable, for Packaging Applications
MIL-O-27210	Oxygen, Aviator's Breathing, Liquid and Gas

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MS22056	Valve, Check, Oxygen Mask, Inlet

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials Standard

D1149	Method of Test for Accelerated Ozone Cracking of Vulcanized Rubber

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

3. REQUIREMENTS

3.1 Qualification - The valves furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.3, 4.3.1, and 6.4).

Source: https://assist.dla.mil -- Downloaded: 20261O-19T10:20Z
Check the source to verify that this is the currentversion before use.

3.2 First article - Unless otherwise specified, the valve furnished under this specification shall be a product which has been inspected and has passed the first article inspection specified herein.

3.3 Materials - Materials shall conform to applicable specifications and shall be as specified herein and on applicable drawings. Materials which are not covered by specifications, or which are not specifically described herein, shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

3.3.1 Nonmetallic materials - Any nonmetallic material that is adversely affected by continued use with oxygen shall not be used.

3.3.1.1 Age - Elastomer components, except silicone, shall not be more than 12 months old from the cure date of manufacture to the date of delivery to any Government Service or to any airframe or accessory manufacturer.

3.3.1.2 Elastomer components - The elastomer components shall be composed of an ozone resistant composition, which shall not bloom and shall meet the specified ozone-resistance performance requirements.

3.3.2 Protective treatment - When materials are used in the construction of the valves that are subject to deterioration when exposed to environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. Protective coating which might crack, chip, or scale during normal service life or under extremes of environmental conditions shall not be used.

3.4 Design and construction - The design and construction of the valve shall be in accordance with MS22056.

3.5 Performance -

3.5.1 Leakage - The valve, when tested as specified in 4.7.2, shall not permit leakage in excess of 25 milliliters per minute at 1 inch of water nor more than 50 milliliters per minute at 13 inches of water.

3.5.2 Pressure drop - The pressure drop across the valve, when tested as specified in 4.7.3, shall not exceed 1 inch of water.

3.5.3 Altitude operation - The valve, when tested as specified in 4.7.4, shall not vibrate, flutter, chatter, or whistle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

3.5.4 Low temperature operation - The valve, after being conditioned as specified in 4.7.5, shall pass the specified tests.

3.5.5 High temperature operation - The valve, after being conditioned as specified in 4.7.6, shall pass the specified tests.

3.5.6 Ozone-resistance - The test slabs, when tested as specified in 4.7.7, shall not show any evidence of checking, cracking, or damage.

3.6 Interchangeability - All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable.

3.7 Weight - The weight of the valve shall not exceed 0.5 ounce.

3.8 Identification of product - The valves shall be marked for identification in accordance with MIL-STD-130, except that the Federal Stock Number shall be omitted from the nameplate. Special marking specified on MS22056 shall be included.

3.9 Workmanship - The valve shall be uniform in quality and shall be free from irregularities, defects, or foreign matter which could adversely affect safety, performance, reliability, or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or pruchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection - The examination and testing of the valves shall be classified as follows:

(a) Qualification inspection - Qualification inspection consists of examinations and tests performed on samples submitted for approval as qualified products.

(b) First article inspection - First article inspection consists of examinations and tests performed on samples which are representative of the production item after award of a contract to determine that the production item conforms to the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

(c) Quality conformance inspection - Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification.

4.3 Qualification inspection - Qualification inspection shall consist of all the examinations and tests of this specification.

4.3.1 Qualification samples - Qualification samples shall consist of 10 valves and 2 elastomer test slabs, 6 inches by 6 inches by 0.075 inch, composed of the identical ozone-resistant composition and cure that was used in manufacturing the valves. The qualification samples shall be forwarded to the Supply Officer, Naval Air Development Center, Johnsville, Warminster, Pennsylvania 18974, Attention: Director, Aerospace Crew Equipment Department. The samples shall be plainly identified by securely attached durable tags marked with the following information:

Sample submitted by (name) (date) for qualification inspection in accordance with the requirements of MIL-V-21701B and number under authorization (reference authorizing letter and number, see 6.4).

4.4 First article inspection - First article inspection shall consist of the following examinations and tests:

Visual examination
Leakage
Pressure drop

4.4.1 First article samples -

4.4.1.1 Applicable to the Naval Air Systems Command - Unless otherwise specified, as soon as practicable after the award of the contract or order, the manufacturer shall submit 4 valves. The samples shall be representative of the construction, workmanship, components, and materials to be used during production. When a manufacturer is in continuous production of these units from contract to contract, submission of further first article samples on the new contract may be waived at the discretion of the procuring activity (see 6.2). Approval of the first article samples or the waiving of first article inspection does not preclude the requirements of submitting to the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 20260-19T10:20Z
Check the source to verify that this is the current version before use.

4.4.1.1.1 Upon completion of the first article inspection, all the applicable inspection reports and when applicable, recommendations and comments pertinent for use in monitoring production will be forwarded to the cognizant Government activity. Two approved valves will be returned to the manufacturer for use in monitoring production. The other samples will be consumed or destroyed in the preproduction inspection and will not be considered as part of the quantity to be delivered under contract.

4.4.1.2 Applicable to the Army - For purchases by the Army, the quantity and kind of samples, the name and address of the first article inspection activity and other pertinent information (see 4.4.1.1 and 4.4.1.1.1 for information) shall be as specified (see 6.2).

4.5 Quality conformance inspection - The sampling and inspection levels shall conform to MIL-STD-105. Quality conformance inspection shall consist of the following examinations and tests:

Visual examination
Dimensions
Leakage
Pressure drop
Preparation for delivery

4.5.1 Sampling -

4.5.1.1 Inspection lot -

4.5.1.1.1 Valve - An inspection lot size shall be expressed in units of valves, made essentially under the same conditions and from the same materials and components. The sample unit shall be one valve.

4.5.1.1.2 Preparation for delivery - An inspection lot size shall be expressed in units of one fully prepared shipping container, containing valves fully prepared for delivery, made from essentially the same materials and components. The sample unit shall be one shipping container, containing valves fully prepared for delivery with the exception that it need not be sealed.

4.5.1.2 Sampling for tests and examinations of valves - The sample size, acceptance criteria, tests, and examinations required for the valves shall be as specified in Table I.

4.6 Test conditions -

4.6.1 Gas - Unless otherwise specified, the gas used in testing the valves shall be oxygen conforming to MIL-O-27210, Type I, nitrogen conforming to BB-N-411, Type I, Class 1, Grade B, or air conforming to BB-A-1034.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

TABLE I

SAMPLE SIZE, ACCEPTANCE CRITERIA, TESTS AND EXAMINATIONS OF THE VALVES


INSPECTION	METHOD	SAMPLE SIZE	ACCEPTANCE CRITERIA 1/
Visual examination (see classification of defects)	4.7.1.1	Every valve	Reject all units with any critical defects. An acceptable quality level of 2.5 defects per hundred units for minor defects.
Dimensions	4.7.1.1.1	Inspection Level S-2	An acceptable quality level of 1.5 defects per hundred units.
Leakage	4.7.2	Every valve	Reject all defective units.
Pressure drop	4.7.3	Inspection Level S-2	An acceptable quality level of 1.0 defects per hundred units.
Preparation for delivery	4.7.1.2	Inspection Level S-2	An acceptable quality level of 4.0 defects per hundred units.

1/ The sampling plan acceptance numbers shall apply collectively to all the characteristics within a stated acceptable quality level.

4.6.2 Temperature and pressure - Unless otherwise specified, tests shall be conducted at local ambient temperature and barometric pressure. The temperature and barometric pressure shall be recorded at the time of inspection. This information shall be available for computation of test data, where required, to normal temperature pressure (NTP) conditions. NTP conditions are 70° F and 29.92 inches of mercury. Test instruments shall be calibrated or adjusted according to their required usage in conducting individual tests.

4.6.3 Test fixture - The test fixture shall consist of an assembly of pieces, assembled in sequence shown on Figure 1 and manufactured in accordance with details shown in Figures 1, 2, and 3. The fixture shall be tightened securely, using rubber gaskets for seals, and installed in specified test stand.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

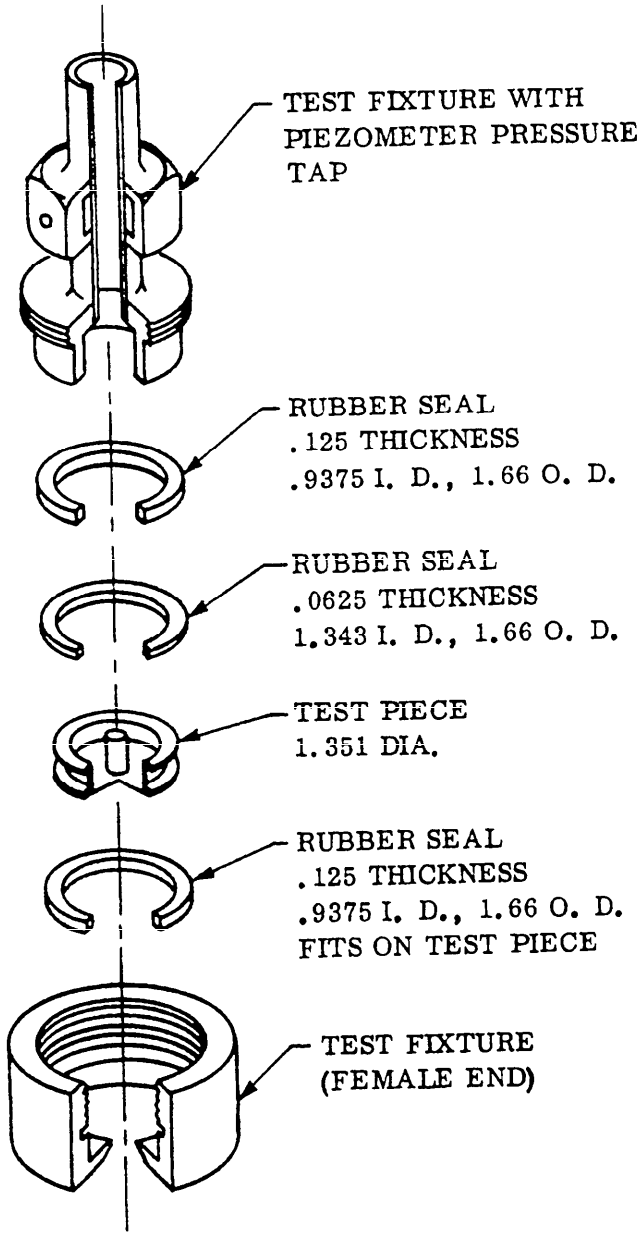

DIMENSIONS IN INCHES

FIGURE 1. TEST FIXTURE AND EVALUATION SPECIMEN SEQUENCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

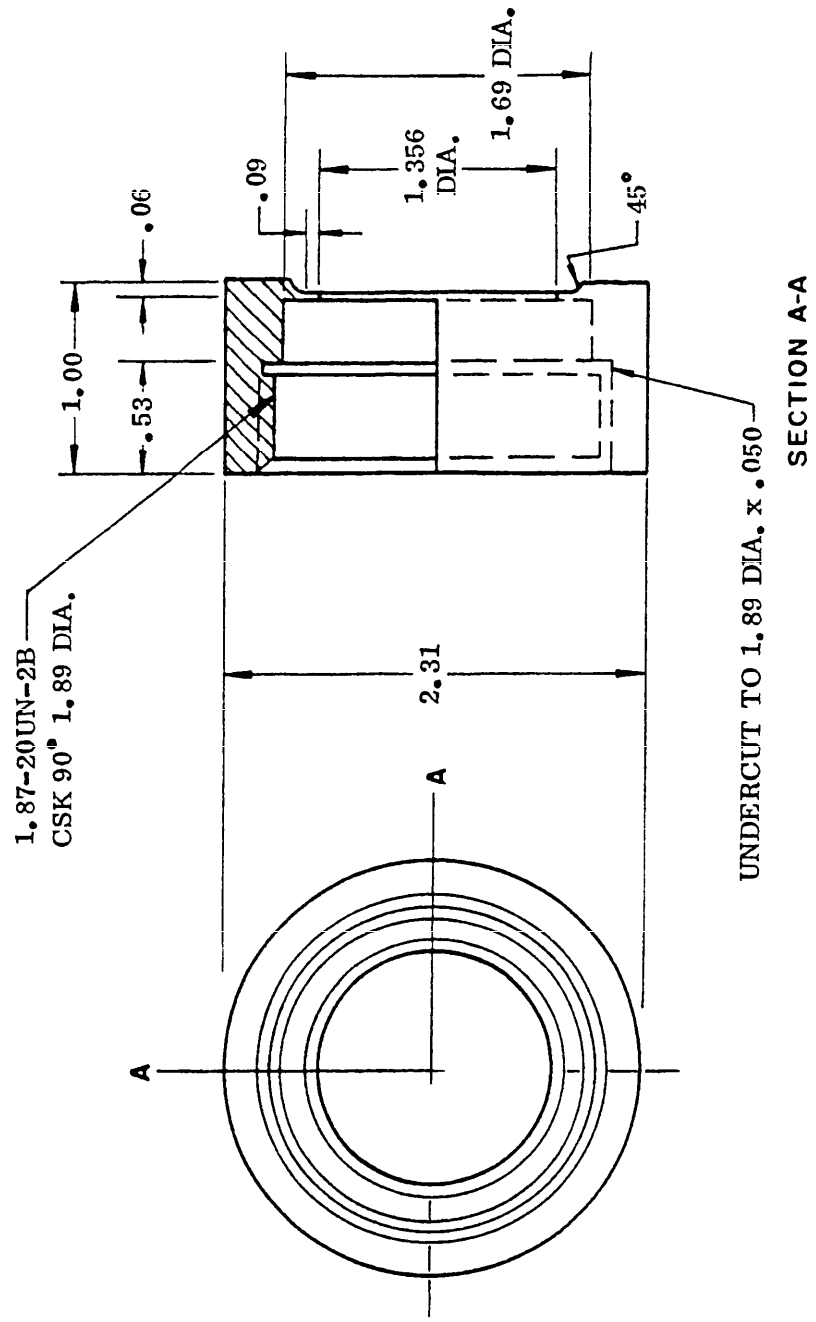

DIMENSIONS IN INCHES

FIGURE 2. TEST FIXTURE (FEMALE END)

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:20Z
Check the source to verify that this is the currentversion before use.

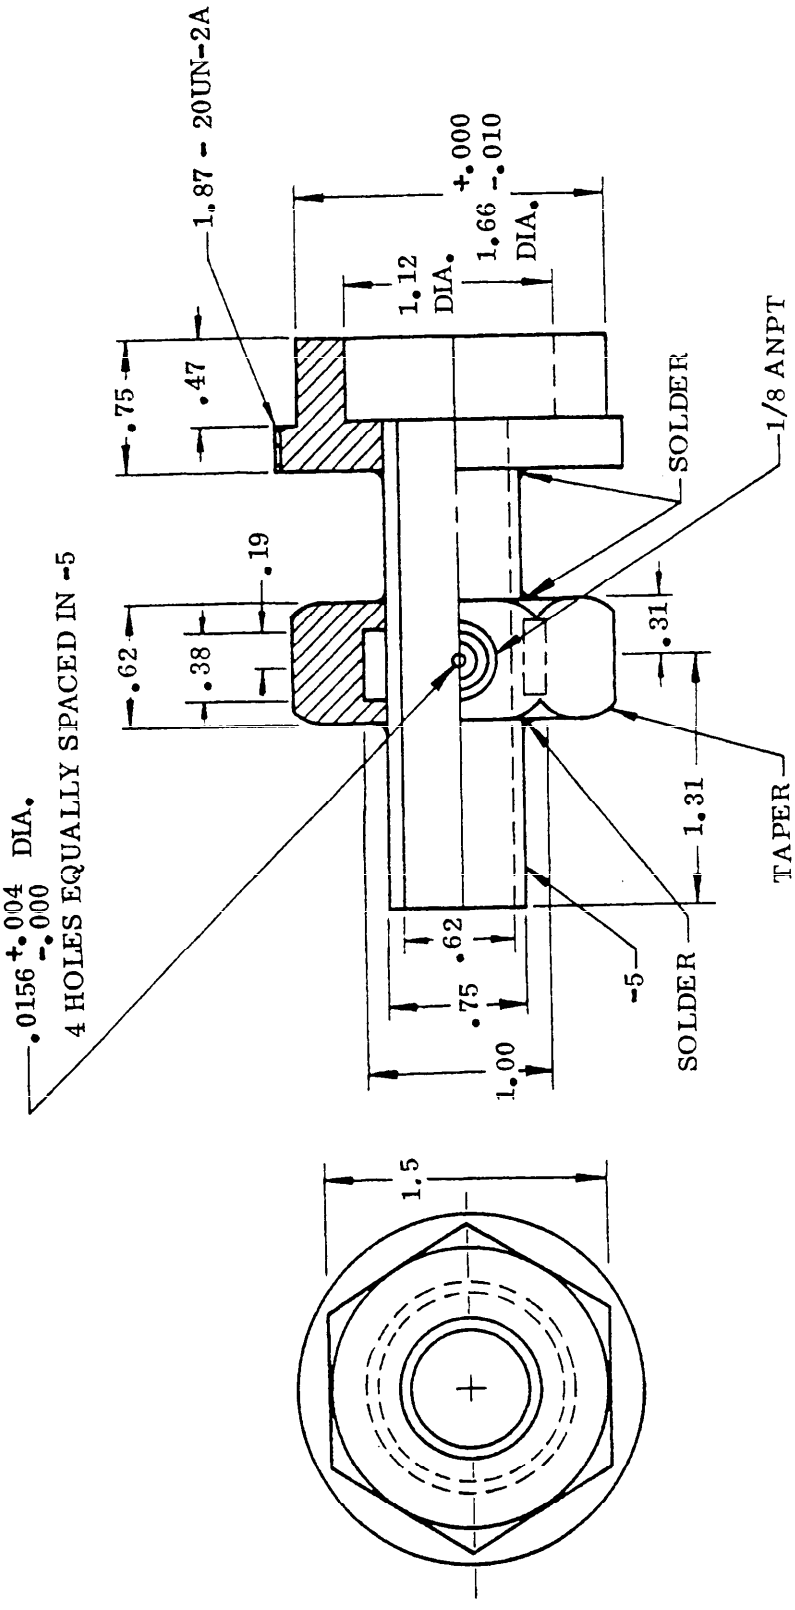

DIMENSIONS IN INCHES

FIGURE 3. TEST FIXTURE SECTION WITH PIEZOMETER PRESSURE TAP INCLUDED

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

4.6.4 Test stand - The following tests shall be conducted by means of a test stand conforming to the specified figure:

Leakage	Figure 4
Proof pressure	Figure 5

The other tests shall be conducted by means of any suitable apparatus. Alternate test equipment, capable of performing the identical tests specified herein, may be used when specifically approved by the procuring activity (see 6.2). Unless otherwise specified, tests shall be conducted with the reference axis of the valve in the vertical position.

4.7 Inspection methods -

4.7.1 Visual examination -

4.7.1.1 Valve - Every valve shall be examined visually to determine conformance to this specification. The classification of defects, Table II, shall be used to classify the defects found.

TABLE II

CLASSIFICATION OF DEFECTS FOR VISUAL EXAMINATION OF THE VALVES

CRITICAL	MINOR
1. Material imperfections - foreign matter embedded. 2. Surface - unclean, rough, misaligned, or containing cracks, nicks, or other flaws. 3. Any component missing, malformed, loose, fractured, or otherwise damaged. 4. Incorrect assembling or improper positioning of components. 5. Faulty workmanship or other irregularities.	201. Marking - missing, insufficient, incorrect, illegible, or not permanent.

4.7.1.1.1 Dimensions - The valves shall be checked dimensionally to determine conformance to MS22056.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

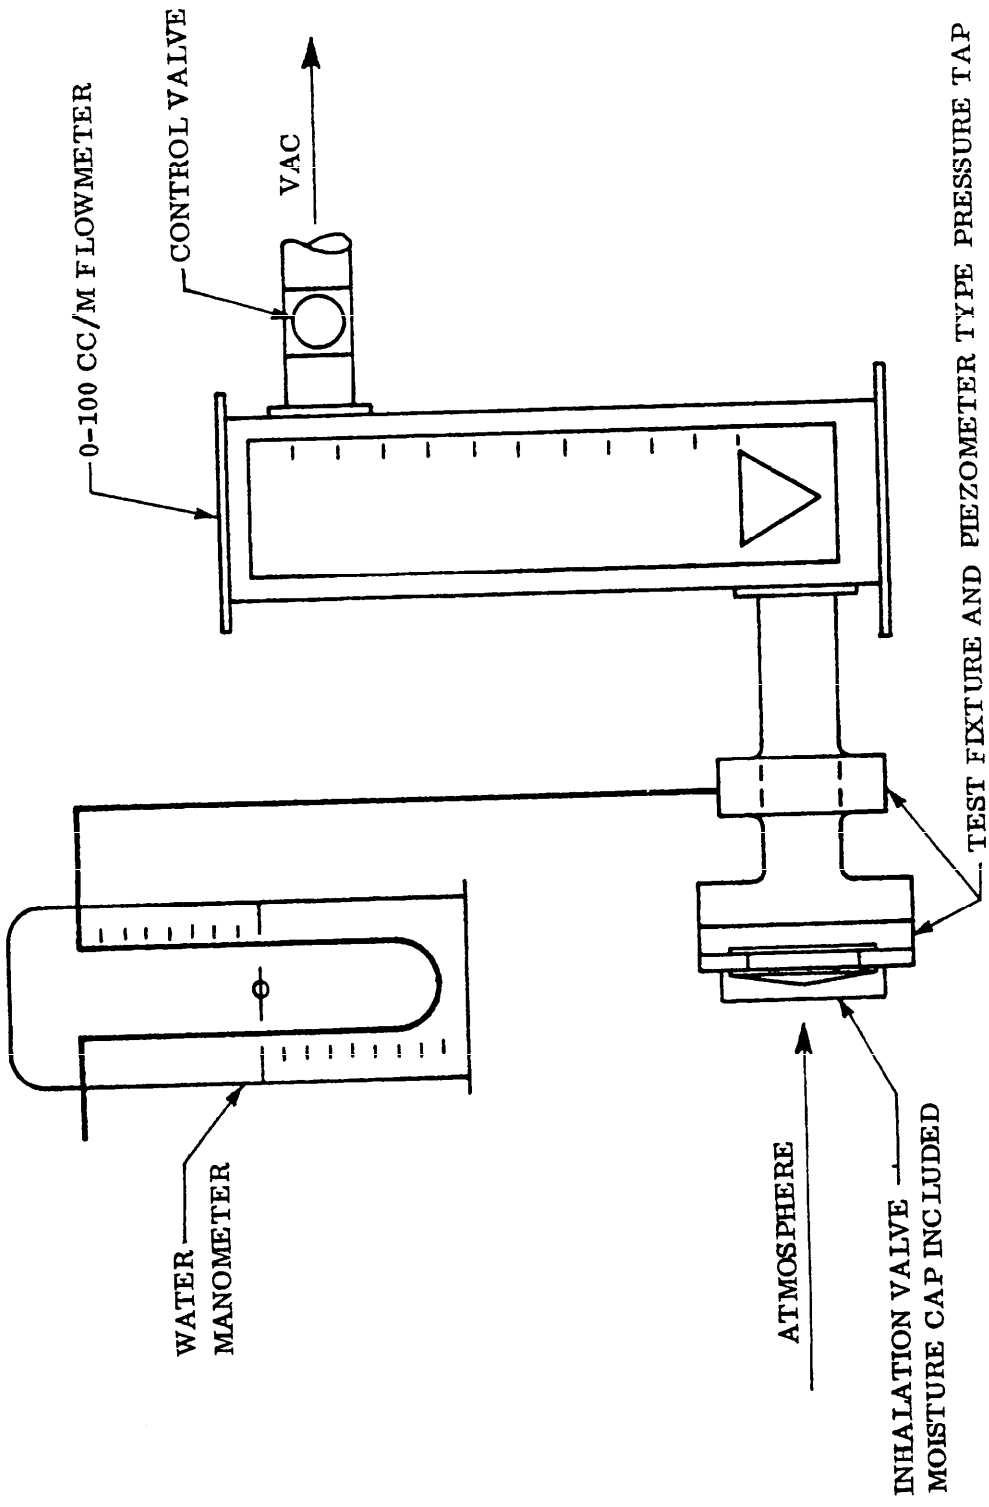


FIGURE 4. TEST STAND - LEAKAGE

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:20Z
Check the source to verify that this is the current version before use.

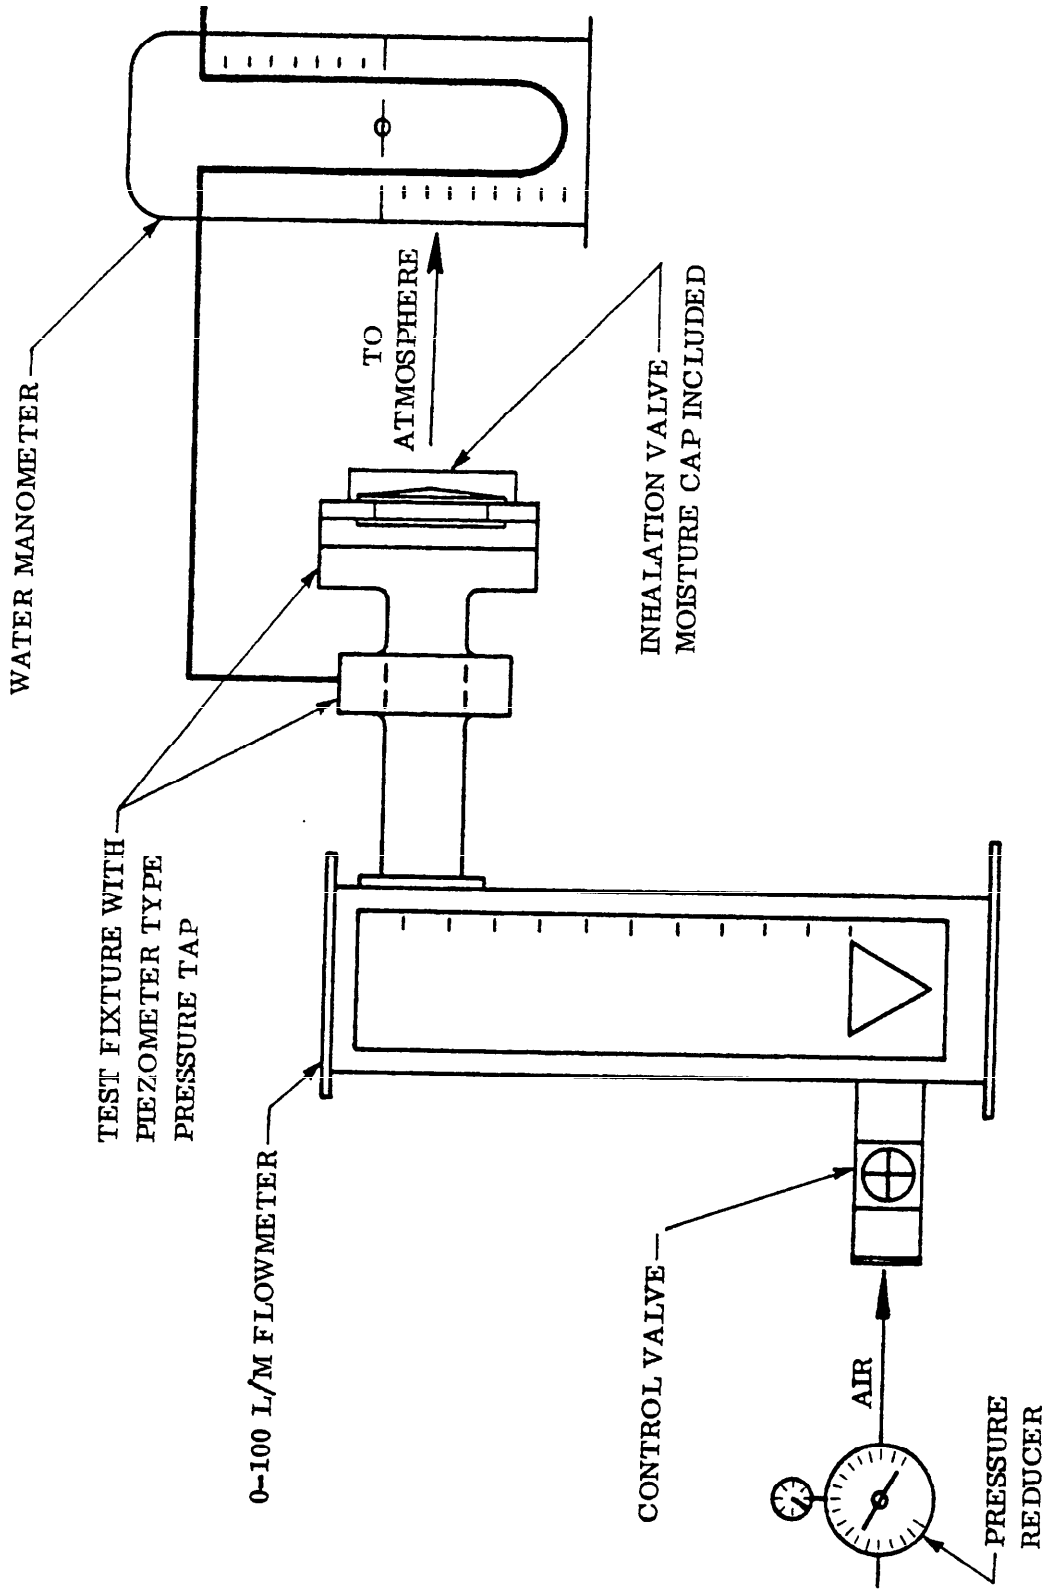


FIGURE 5. TEST STAND - PRESSURE DROP

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

4.7.1.2 Preparation for delivery - Each of the fully prepared shipping containers, containing valves selected as a sample unit from the lot, shall be examined for defects listed in Table III to determine that the packaging, packing, and marking conform to this specification.

TABLE III

LIST OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECTS
Exterior and interior markings	Missing, incorrect, incomplete, illegible; of improper size, location, sequence; or method of application; markings not the same on the interior and exterior containers.
Packaging and packing materials	Any non-conforming component; any component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of the unit package, intermediate package, container flaps, loose strappings, etc.; bulging or distortion of the containers.
Exterior and interior weight or content	Number per container is more or less than required; gross or net weight exceeds the requirements.

4.7.2 Leakage - The test fixture (4.6.3) shall be assembled as shown on Figure 1 and installed in test stand shown on Figure 4. Adjust control valve to produce a suction of 1 inch of water on the inlet side of the valve and maintain this condition for a minimum period of 2 minutes. During this period, the leakage through the valve shall be read on the manometer and the valve shall pass the requirements specified in 3.5.1. The test procedure shall then be repeated utilizing a suction of 13 inches of water and the valve shall pass the requirements specified in 3.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

4.7.2.1 Upon completion of test procedures, if permissible leakage limits are exceeded, the valve shall be rinsed in distilled water and then dried thoroughly using clean dry air to remove any lint that may be on the valve seat. The leakage test procedure shall then be repeated.

4.7.3 Pressure drop - The test fixture (4.6.3) shall be assembled as shown on Figure 1 and installed in test stand shown on Figure 5. Adjust control valve so that a pressure of 10 inches of water shall be applied to the inlet side of the valve and to produce a flow of 50 liters per minute through the valve in the normal direction of flow. These conditions shall be maintained for a minimum period of 2 minutes. During this period, the pressure drop through the valve shall be read on the manometer and the valve shall pass the requirements specified in 3.5.2.

4.7.4 Altitude operation - Valves shall be installed in oxygen masks conforming to MIL-M-6482. The masks shall be worn by 5 subjects and they shall be subjected to simulated flight conditions from sea level to 43,000 feet altitude. During this test, the valves shall pass the requirements specified in 3.5.3.

4.7.5 Low temperature operation - A valve shall be installed in the test fixture (4.6.3) as shown on Figure 1. The test fixture and valve shall then be placed in a test chamber and conditioned at a temperature of -20 ±5° F for 3 hours. After conditioning, and while still at this temperature, the valve shall be subjected to and pass the requirements of the leakage test. Upon completion of these test procedures, the valve shall be returned to room temperature and shall then be subjected to and pass the requirements of the leakage test.

4.7.6 High temperature operation - A valve shall be installed in the test fixture (4.6.3) as shown on Figure 1. The test fixture and valve shall then be placed in a test chamber and conditioned at a temperature of +160 ±5° F for 3 hours. After conditioning, and while still at this temperature, the valve shall be subjected to and pass the requirements of the leakage test. Upon completion of these test procedures, the valve shall be returned to room temperature and shall then be subjected to and pass the requirements of the leakage test.

4.7.7 Ozone-resistance - The test slabs submitted for qualification shall be tested for ozone resistance. The test apparatus shall be in accordance with ASTM Method No. D1149. The test slabs shall be elongated 20 percent, placed in an ozone-free atmosphere for 24 hours, then placed in the ozone chamber. The chamber shall be adjusted to 100 ±2° F and to give an exposure of ozone concentration of 120 ±10 parts by volume of ozone per million parts by volume of air. The air-ozone velocity in the chamber shall be at least 2 feet per second. The material shall be exposed to these conditions for 60 minutes. The test slabs shall then be examined under 10X magnification and shall pass the requirements specified in 3.5.6.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging - Packaging shall be Level A or C, as specified in the contract or order (see 6.2).

5.1.1 Level A - Unless otherwise specified, each valve shall be preserved and packaged in accordance with MIL-P-116, Method IC-3. Each valve shall be cleaned in accordance with Process C-1 except that cleaning by immersion in solvent shall be prohibited. Immediately after cleaning, the valve shall be sealed within a transparent film bag, minimum film thickness of .0015 inch, conforming to MIL-B-22205, Type III. The continuous line marking requirement of MIL-F-22191, paragraph 3.4.1, is not mandatory. The bagged valve shall be suitably cushioned and packaged within a close fitting set up or folding paperboard box conforming to PPP-B-566 or PPP-B-676.

5.1.2 Intermediate packing - Unless otherwise specified, twenty-four valves, packaged as specified in 5.1.1, shall be packaged within an intermediate fiberboard box, conforming to PPP-B-636, Class - Weather resistant, Grade W6C. The closure and sealing shall be accomplished in accordance with the applicable requirements in the appendix to PPP-B-636.

5.1.3 Level C - Each valve shall be preserved and packaged in a manner that will prevent physical damage and corrosion during transit from the supply source to the first receiving activity. The contractor's commercial practice may be utilized when it conforms to the criteria stated herein.

5.2 Packing - Packing shall be Level A, B or C, as specified in the contract or order (see 6.2). Insofar as practicable, shipping containers shall effect a close fit, contain identical quantities and be of uniform configuration.

5.2.1 Level A - Valves packaged as specified in 5.1.1 and 5.1.2 shall be packed for shipment within fiberboard containers conforming to PPP-B-636, Class-Weather resistant, Grade V3S or V3C, or plywood conforming to PPP-B-601, weather-resistant class, as specified (see 6.2). Plywood boxes shall be surface treated in accordance with the requirements of PPP-B-601. The maximum gross weight and dimensions of the shipping container shall conform to the requirements of Table II of PPP-B-636. The closure, sealing and reinforcing of the shipping containers shall be accomplished in accordance with the applicable requirements in the appendix to PPP-B-636.

5.2.2 Level B - Valves packaged as specified in 5.1.1 and 5.1.2 shall be packed for shipment within fiberboard containers conforming to PPP-B-636, Class - Domestic, Grade 275. The maximum gross weight and dimensions of the shipping container shall conform to the requirements of Table I of PPP-B-636. The closure and sealing of the shipping containers shall be accomplished in accordance with the applicable requirements in the appendix to PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T10:20Z
Check the source to verify that this is the current version before use.

5.2.3 Level C - Valves preserved and packaged as specified shall be packed for shipment in a manner that will afford protection against damage during transit from the supply source to the first receiving activity. The pack shall as a minimum, comply with the rules and regulations applicable to the mode of transportation utilized.

5.3 Marking - All unit, intermediate and shipping containers shall be marked in accordance with MIL-STD-129. The cure date of the elastomer component as well as the contract or order number shall appear on the unit containers.

5.3.1 Precautionary marking - The following precautionary marking shall appear on each unit package:

"CAUTION: DO NOT ALLOW CONTAMINANTS OF ANY KIND TO BE USED ON OR ABOUT THE OXYGEN VALVES"

6. NOTES

6.1 Intended use - The inlet check valve is intended for use as a component of pressure breathing oxygen masks conforming to MIL-M-6482.

6.2 Ordering data - Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Whether first article inspection is waived (see 4.4.1).

(c) Name and address of the first article inspection laboratory (see 4.4.1).

(d) Whether test equipment, other than specified, may be used (see 4.6.4).

(e) Selection of applicable levels of preservation, packaging, and packing.

(f) Applicable shipping container for Level A packing (see 5.2.1).

(g) Applicable methods of cleaning and preservation.

(h) Items of Data required (see 6.3).

6.3 Data - For the information of Contractors and Contracting Officers, any of the data specified in applicable documents listed in Section 2 of this specification

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:20Z
Check the source to verify that this is the current version before use.

or referenced lower-tier documents need not be prepared for the Government and shall not be furnished to the Government unless specified in the contract or order. The data to be furnished shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order. NavAir Form 4200/25 (Drawings, Lists, and Specifications Required) shall be attached where applicable.

6.4 With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Commander, Naval Air Systems Command, Department of the Navy, Washington, D. C. 20360; however, authorization for qualification of products shall be obtained from the Commanding Officer, Naval Air Development Center, Johnsville, Warminster, Pennsylvania 18974, Attention: Director, Aerospace Crew Equipment Department. Prior to submission of the samples for qualification inspection, the manufacturer shall submit a request to the Aerospace Crew Equipment Department indicating a date on which the samples can be forwarded and also request an authorization number to accompany the samples.

6.4.1 When requested, the manufacturer shall submit engineering drawings and inspection reports in accordance with SD-6, Provisions Governing Qualification.

Custodians:
Navy - AS
Army - AV

Preparing Activity:
Navy - AS
(Project No. 1660-0167)

Review activities:
Navy - AS
Army - AV

NOTICE - Review/user information is current as of date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL-V-21701B VALVE, CHECK, OXYGEN MASK, INLET

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED *(Printed or typed name and activity)*	DATE

DD FORM 1 NOV 64 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-8279

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:20Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Weapons Engineering Standardization Office (Code X)
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:20Z
Check the source to verify that this is the current version before use.