MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11737334 (LOGIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of electronic assembly known as Circuit Card Assembly: 11737334 (Logic) (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified hereia.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment; Acquisition, Maintenance, and Disposition of
MIL-S-45743	Soldering, Manual Type, High Reliability Electrical, Electronic, Instrument, Communication, and Radar for Aerospace and Control Systems, Procedure for

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

MIL-S-46844	Solder Bath Soldering of Printed Wiring Assemblies, Automatic Machine Type

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-81O	Environmental Test Methods

DRAWINGS

U. S. Army, Frankford Arsenal

Fl1737334	Circuit Card Assembly: 11737334 (Logic)

PACKAGING DATA SHEET

11737334	Packaging of Circuit Card Assembly: 11737334 (Logic)

(Copies of specifications, standards, drawings, and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:35Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The Circuit Card Assembly - (Logic), herein referred to as the assembly, shall be manufactured in accordance with Drawing F11737334 and drawings pertaining thereto.

3.2 General specification. The assembly shall meet the following requirements, where applicable, of MIL-F-13926:

a. Order of precedence

b. Dimensions and tolerances

c. Part identification and marking

d. Electrical and electronic assemblies

e. Workmanship.

3.2.1 Soldering. Soldering shall be in accordance with M.IL-S-45743 or MIL-S-46844, except that bare copper wire exposure shall be permitted at clipped ends of component leads.

3.3 Performance. Unless otherwise specified, the assembly shall meet the Performance requirements of this specification at standard ambient temperatures between 60 degrees Fahrenheit (°F) and 90°F.

3.3.1 Loads, power, and signals. The assembly shall perform as specified herein when the loads, power, and signals of table I are applied as specified.

3.3.1.1 Range light drive. With the logical one digital type-A signal (item 3.1) of table I applied to P1-6, the voltage at P1-23 shall be +15.0 ± 1.0 Vdc. With the logical zero digital type-A signal (item 3.1) of table I applied to Pi-6, the voltage at P1-23 shall be +0.4 ± 0.4 Vdc。

3.3.1.2 Manual reset signal. With no input signal applied to Pi-4 the voltages at P1-21 and P1-22 shall be +4. 2 ± 1.0 Vdc. With the iogical zero digital type-A signal (item 3.1) of table I applied to P1-4, the voltages at P1-21 and P1-22 shall be +0.2 ± 0.2 Vdc.

3.3.1.3 Turn-off reset. The time interval between turn-off of the +15 Vdc power (item 2.2) of table I to P1-5 and the change in Levet of the reset voltage at P1-21 shall be as shown on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:35Z
Check the source to verify that this is the current version before use.

TABLE I
LOADS, POWER, AND SIGNALS

Item	Conditions	Characteristics	Connections
1.	Loads		Connected between the following pins:
1.1	Resistor	620 Ohms(Ω) ±5 percent, 1/2 watt	P1-1 and P1-5
1.2	Resistor	620Ω ±5 percent	P1-2 and P1-5
1.3	Resistor	620Ω ±5 percent	P1-3 and P1-5
1.4	Resistor	180Ω ±5 percent	P1-19 and P1-5
1.5	Resistor	200Ω ±5 percent	P1-23 and P1-5
1.6	Resistor	180Ω ±5 percent	P1-24 and P1-5
1.7	Resistor	180Ω ±5 percent	P1-26 and P1-5
1.8	Resistor	620Ω ±5 percent	P1-31 and P1-5
1.9	Resistor	620Ω ±5 percent	P1-35 and P1-5
1.10	Resistor	4700Ω ±5 percent	P1-5 and P1-17
1.11	NAND Gate	1 Gate-DTμL 9946 or equivalent	P1-20 and P1-17
1.12	NAND Gate	12 Gates-DTμL 9946 or equivalent	P1-21 and P1-17
1.13	NAND Gate	3 Gates-DTμL 9946 or equivalent	P1-22 and P1-17
1.14	NAND Gate	3 Gates-DTμL 9946 or equivalent	P1-25 and P1-17
1.15	NAND Gate	3 Gates-DTμL 9946 or equivalent	P1-27 and P1-17
1.16	NAND Gate	1 Gate-DTμL 9946 or equivalent	P1-28 and P1-17
1.17	NAND Gate	1 Gate-DTμL 9946 or equivalent	P1-29 and P1-17
1.18	NAND Gate	1 Gate-DTμL 9946 or equivalent	P1-30 and P1-17
1.19	NAND Gate	5 Gates-DTμL 9946 or equivalent	P1-32 and P1-17
2.0	Power Sources		Connected between the following pins
2.1	+5 Vdc	Tolerance: ±0.2 Vdc Ripple: 25 mV p-p	P1-16(+) and P1-17(-)
2.2	+15 Vdc	Tolerance: +0.7 Vdc Ripple: 25 mV p-p	P1-5(+) and P1-17 (-)
3.0	Signal Sources		Applied as specified herein.
3.1	Digital Type-A	Logical one: +4.0 +1.0V Logical zero: +0.2 +0.2V	
3.2	Digital	Logical one: +15.0 ±1.0 V Logical zero: +0.5 ±0.5 V	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

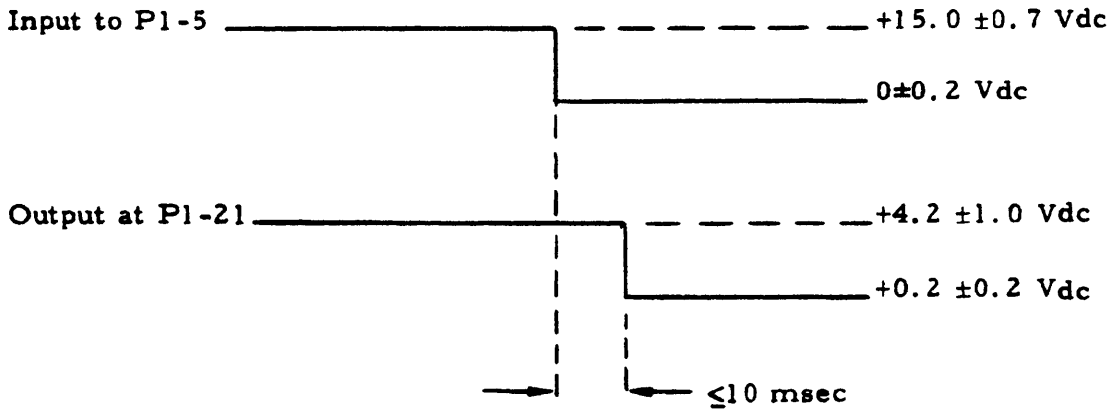


Figure I. Turn-off Reset Time

3.3.1.4 Turn-on reset. The time interval between turn-on of the +15 Vdc power (item 2.2) of table I of P1-5 and the appearance of the reset voltage at P1-21 shall be as shown of figure 2.

3.3.1.5 First-second-last logic and light drive. With the logical zero digital type-A signal (item 3.1) of table I applied as specified in table II, the voltages at the output terminals shall be as specified in table II for the associated input conditions.

3.3.1.6 Malfunction logic and light drive. With the digital type. A signal (item 3.1) of table I applied as specified in table III, the voltage at the output terminals shall be as specified in table III for the associated input conditional.

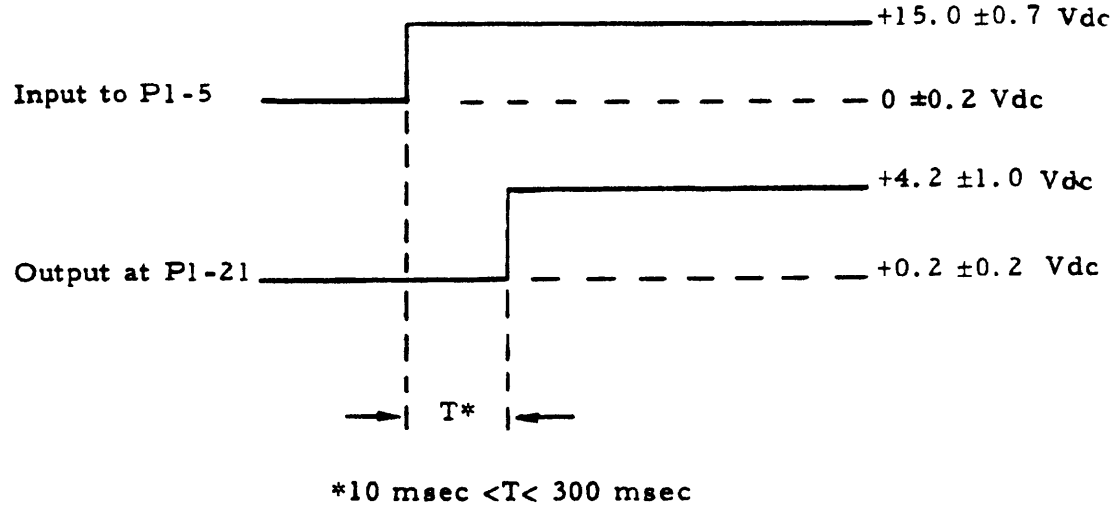


Figure 2. Turn-on Reset Time

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

TABLE II
FIRST-SECOND-LAST LOGIC AND LIGHT DRIVE OUTPUTS

Item (1)	Inputs to Pins of P1 (2)				Outputs at Pins of P1 (3)					
	4	7	9	8	19	20	24	25	26	27
1	NC	O	NC	NC	V_4	V_2	V_1	V_3	V_1	V_3
2	NC	NC	NC	O	V_1	V_3	V_1	V_3	V_4	V_2
3	NC	NC	O	NC	V_1	V_3	V_4	V_2	V_1	V_3
4	O	NC	NC	NC	V_1	V_3	V_1	V_3	V_4	V_2

NOTES:
1. Items 1 through 4 must be performed in sequence.
2. Input condition legend: O = Momentary logical zero, type-A
   NC = No connection
3. Output voltage legend: V_1 = +15.0 ±1.0 Vdc
   V_2 = +4.2 ±1.0 Vdc
   V_3 = +0.25 ±0.25 Vdc
   V_4 = +1.8 ±0.7 Vdc

TABLE III
MALFUNCTION LOGIC AND LIGHT DRIVE OUTPUTS

Item	Inputs to Pins of P1 (1)							Outputs at Pins of P1 (2)			
	36	33	10	11	12	13	14	28	29	30	31
1	NC	1	1	1	1	1	1	V_5	V_5	V_5	V_1
2	↑	1	1	1	1	1	0	V_2	V_5	V_2	V_1
3		1	0	1	1	1	0	V_2	V_5	V_5	V_6
4		1	0	1	1	1	1	V_2	V_5	V_5	V_6
5		0	0	1	1	1	0	V_2	V_5	V_2	V_1
6		0	0	1	1	1	1	V_5	V_5	V_5	V_1
7		1	1	1	1	0	1	V_5	V_5	V_2	V_6
8		1	1	1	0	0	1	V_5	V_5	V_2	V_6
9	↓	1	1	0	1	0	1	V_5	V_5	V_2	V_6
10	NC	1	0	1	1	0	1	V_5	V_5	V_2	V_6

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:35Z
Check the source to verify that this is the current version before use.

TABLE III (Continued)

Item	Inputs to Pins of P1 (1)							Outputs at Pins of P1 (2)			
	36	33	10	11	12	13	14	28	29	30	31
11	NC	1	1	1	0	1	1	V_2	V_2	V_5	V_6
12	↕	1	1	0	0	1	1	V_2	V_2	V_5	V_6
13		1	0	1	0	1	1	V_2	V_2	V_5	V_6
14		1	1	0	1	1	1	V_5	V_2	V_5	V_6
15	NC	1	0	0	1	1	1	V_5	V_2	V_5	V_6
16	0	1	0	1	1	1	1	V_2	V_5	V_5	V_1

NOTES: 1. Input condition legend:
1 = Logical one, Type-A
Source impedance = 6K ±15 percent
0 = Logical zero, Type-A

2. Output voltage legend:
V_1 = +15.0 ±1.0 Vdc
V_2 = +4.2 ±1.0 Vdc
V_5 = +0.2 ±0.2 Vdc
V_6 = +0.4 ±0.4 Vdc
NC = No Connection

3.3.1.7 Blanking pulse. With the logical zero digital type-A signal (item 3.1) of table I applied to P1-10, application of the waveform shown on figure 3 to pin P1-15 shall result in appearance of the output waveforms shown on figure 3 at the pins specified thereon (the signals may be recurring)".

3.3.186 Test switch. With the digital type-A and type-B signals (items 3.1 and 3.2, respectively) of table I applied as specified in table IV, the voltages at the output terminals shall be as specified in table IV for the ass ociated input conditions.

3.3.1.9 Continuity. With neither power nor signals applied, a short circuit condition (resistance less than 0.3 ohm) shall exist between P1-33 and Pi-34.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

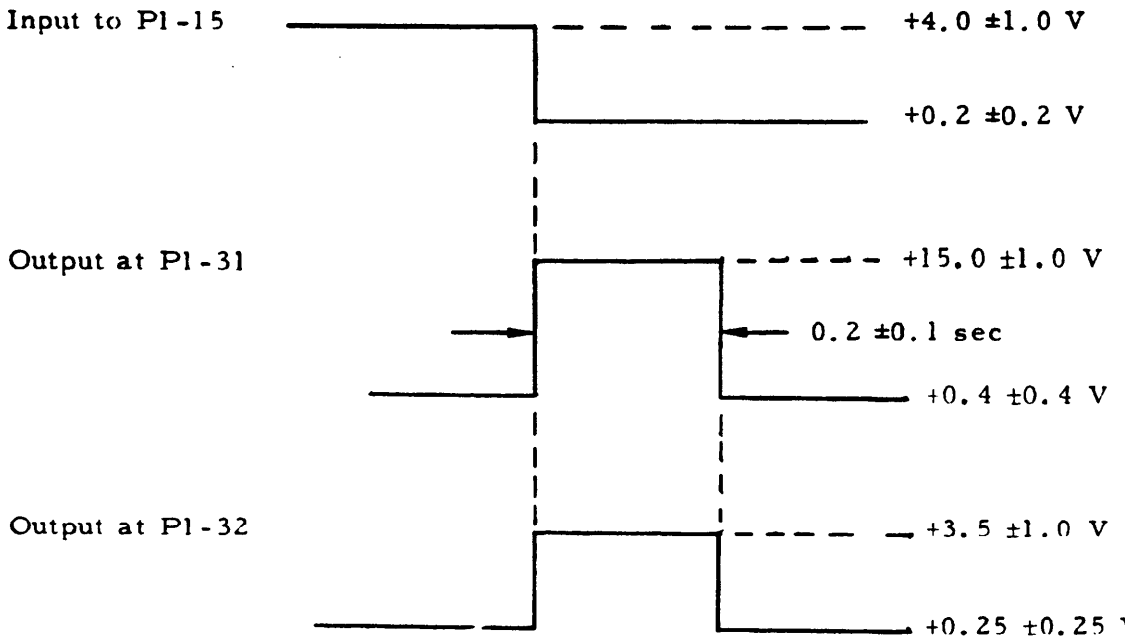


Figure 3. Blanking Pulse Waveforms

TABLE IV
TEST SWITCH RESPONSES

Item	Inputs to Pins of P1 (1)			Outputs at Pins of P1 (2)								
	7	9	18	19	23	24	26	31	1	2	3	35
1	0_A	1_A	NC	V_4	V_1	V_1	V_1	V_1	V_1	V_1	V_1	V_1
2	0_A	1_A	0_B	V_4	V_7	V_4	V_4	V_7	V_7	V_7	V_7	V_7
3	1_A	0_A	0_B	V_4	NA	NA	NA	NA	NA	NA	NA	NA

NOTES: 1. Input condition legend:
1_A = Logical one, type-A
Source impedance = 6K ±15 percent
0_A = Logical zero, type-A
0_B = Logical zero, type-B
NC = No connection

2. Output voltage legend:
V_1 = +15.0 ±1.0 Vdc
V_4 = +1.8 ±0.7 Vdc
V_7 = +0.8 ±0.4 Vdc
NA = Not Applicable

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:35Z
Check the source to verify that this is the current version before use.

3. 3.2 Environmental

3. 3.2.1 Storage temperature. The assembly shall meet the requirements of 3.3.1 at ambient temperature after exposure to and thermal stabilization at -80°F and +160°F.

3.3.2.2 Operating temperatures. The assembly shall meet the requirements of 3.3.1 while exposed to and thermally stabilized at -40°F and +125°F, subsequent to which the requirements of 3.3.1 shall be met at ambient temperature .

3.3.2.3 Vibration. The assembly shall show no physical failure and shall meet the requirements of 3.3.1 after being exposed to the following vibratory conditions:

a. Amplitude:	1 /64 inch, constant (1/32 inch double amplitude)
b. Vibratory motion:	Simple harmonic
c. Sweep time:	5 to 55 to 5 Hertz in a five-minute period
d. Vibration cycling:	Three linear or logarithmic sweeps applied to each of the three mutually perpendicular axes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or nay other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and sertices conform to prescribed requirements.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval. The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three assemblies. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure conformance to all the requirements of this specification. A record of this inspection, including certificates of conformance for materials, shall be submitted with the sample.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of this specification. The sample and a record of this inspection, including certificates of comformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4.3 Inspection provisions

4.3.1 Submission of product. Unless otherwise specified herein, or by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with inspection and sampling procedures herein and submission of product provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in the respective specifications and Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.3 Functional tests. The requirements and tests in table V shall be inspected on a 100 percent basis. All examinations and tests shall be conducted at the standard ambient temperature.

TABLE V
FUNCTIONAL TESTS

Classification	Characteristics	Requirements	Test Paragraph
101.	Range light drive	3.3.1.1	4.6.2
102.	Manual reset signal	3.3.1.2	4.6.3
103.	Turn-off reset	3.3.1.3	4.6.4
104.	Turn-on reset	3.3.1.4	4.6.5
105.	First-second-last logic and light drive	3.3.1.5	4.6.6
106.	Malfunction logic and light drive	3.3.1.6	4.6.7
107.	Blanking pulse	3.3.1.7	4.6.8
108.	Test switch	3.3.1.8	4.6.9
109.	Continuity	3.3.1.9	4.6.10

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4.4 Special sampling. The selection of samples shall be in accordance with section 7 of MIL-STD-105.

4.4.1 General. One assembly shall be selected at random by a Gove rnment re-ative as a control sample from each 50 produced. The control sample shall meet the requirements and tests in table VI.

4.4.2 Environmental. Three assemblies shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control samples shall meet the requirements and tests in table VII.

TABLE VI
SPECIAL SAMPLING - GENERAL

Classification	Control Tests	Requirements	Test Paragraph
301.	Fabrication	3.1	Applicable drawings - visual
302.	General specification	3.2	MIL-F-13926 - visual

TABLE VII
SPECIAL SAMPLING - ENVIRONMENTAL

Classification	Control Tests	Requirements	Test Paragraph
303.	Storage temperature	3.3.2.1	4.6.11.1
304.	Operating temperature	3.3.2.2	4.6.11.1
305.	Vibration	3.3.2.3	4.6.11.2

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:35Z
Check the source to verify that this is the current version before use.

4.4.3 Acceptance and rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with the acceptance and rejection criteria specified in MIL-STD-105.

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607. The inspection equipment listed in table VIII shall be utilized in performing the tests specified herein.

4.5.1 Government furnished inspection equipment. Where the contract provides for Government furnished inspection equipment, supply and maintenance of inspection equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor furnished inspection equipment

4.5.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAPs forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

4.5.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the test methods and procedures specified in 4. 6 of this specification and with the component inspection procedures specified in examination and test facilities requirements of MIL-F- 13926. Since tolerance of inspection equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the inspection equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances ussed in the design of inspection equipment shall be so selected and controlled as to insure that the inspection equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of inspection equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

TABLE VIII
INSPECTION EQUIPMENT

Item	Nomenclature	Description
1.	Dc power supply	+5.0 ±0.2 Vdc, Ripple: 25 mV p-p maximum
2.	Dc power supply	+15.0 ±0.7 Vdc, Ripple: 25 mV p-p maximum
3.	Dc voltmeter	Range of 0 to 20 Vdc Accuracy: ±1 percent
4.	Signal sources	Capable of providing dc levels and waveforms specified in items 3.1 and 3.2 of table I

4.6 Test methods and procedures

4.6.1 Test conditions. Unless otherwise specified, the test conditions shall be in accordance with the test facilities provisions of MIL-F-1 3926.

4.6.1.1 Initial conditions. Connect the loads and power to the assembly as specified in table I.

4.6.2 Range light drive test. Apply the digital type-A signal (item 3.1) of table I to P1-6, first at a Logical one level, then at a logical zero level. Measure the output voltages at P1-23 for each input condition to determine compliance with 3.3.1.1.

4. 6.3 Manual reset signal test. with no input applied to P1-4 measure the output voltages at P1-21 and P1-22 to determine compliance with 3.3.1.2. Apply the logical zero type-A signal (item 3.1) of table I to P1-4. Measure the output voltages at P1-21 and P1-22 to determine compliance with 3.3.1.2.

4.6.4 Turn-off rest test. Turn-off the +15 Vdc power at P1-5. Measure the time interval between the +15-volt power turn-off and the change in level of the reset voltage at P1-21. Measure the final voltage level at P1-21. Verify compliance with 3.3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:35Z
Check the source to verify that this is the current version before use.

4.6.5 Turn-on reset test. Turn off and then turn on the +1 5 Vdc power at P1-5. Measure the time interval between the +15-volt power turn-on and the change in level of the reset voltage at P1-21. Measure the final voltage level at P1-21, verify compliance with 3.3.1.4.

4. 6.6 First-second-last logic and light drive test. Apply the logical zero type-A signal of table I to the input terminals as specified in table II. Measure the resulting output voltages for each input condition to determine compliance with 3.3.1.5.

4.6.7 Malfunction logic and light drive test. Apply the logical one and logical zero type-A signals of table I to the input terminals as specified in table III. Measure the resulting output voltages for each input condition to determine compliance with 3.3.1.6.

4.6.8 Blanking pulse test. With the togical zero type-A signal of table I applied to P1-10, apply the type-A signal with the waveform shown on figure 3 to P1-15. Observe the waveforms and amplitudes of the outputs at P1-31 and P1-32 to determine compliance with 3.3.1.7.

4.6.9 Test switch test. Apply the logical one and logical zero tyPe-A and the logical zero) type-B signals of table I to the input terminals as spe~ified in table IV. Measure the resulting output voltages for each input condition to determine compliance with 3.3.1.8.

4.6.10 Continuity test. With neither power nor signals applied, measure the resistance between P1-33 and P1-34 to determine compliance with 3.3.1.9.

4.6.11 Environmental tests

4.6.11.1 Temperature. The test apparatus shall be in accordance with the applicable test facilities provision of MIL-F-13926 except that the assembly may be mounted on the inside surface of the test chamber. Perform this test in accordance with Procedure I of MIL-F-13926, with conditions C (-40°F) and E (+125°F), and with the rate of temperature change during cycling not greater than 8°F per minute. At each of the specified operating temperatures, perform the tests of 4.6.2 through 4.6. 10 to determine compliance with 3.3.2.1 and 3.3.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T20:35Z
Check the source to verify that this is the current version before use.

4.6.11.2 Vibration. Perform this test utilizing the apparatus specified in Method 514.1 of MIL-STD-810 and in accordance with Part l of Procedure I therein, except that the vibratory conditions of 3.3.2.3 shall apply. Following vibration exposure, examine the assembly for structural failures, loose hardware, wire breakage, and abrasion. Perform the tests of 4. 6.2 through 4.6.10 to determine compliance with 3.3.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELI VERY

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging Data Sheet 11737334.

6. NOTES

6.1 Intended use. The assembly is a module of the Laser Ranging Commander's Control C-9134()/VVG-1, intended for use in the Fire Control Rangefinder AN/VVG-1(). Appropriate combinations of logic control signals are accepted by the circuits of this assembly to perform the following major functions:

a. Provide control logic for target selection circuits

b. Generate unit range and malfunction signals for numeric display

c. Energize panel indicator lights

d. Generate turn-on and turn-off reset signals.

6.2 Ordering data. Procurement documents should specifiy the following:

a. Title, number, and date of this specification

b. Applicable packaging data sheet number (see 5.1)

c. Selection of applicable levels of preserntion, packaging and packing

d. Applicable stock number

e. Requirement for First Article Submission.

Custodian:

Army - MU

Preparing Activity:

Army - MU

PROJECT No) . 1240-A303

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T20:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-C-50735(MU) Circuit Card Assembly: 11737334 (Logic)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:35Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Frankford Arsenal
ATTN: SARFA-MDM
Philadelphia, Penna. 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.