INCH-POUND

MIL-G-50349B (AR)
21 December 1993
SUPERSEDING
MIL-G-50349A (AR)
26 April 1976

MILITARY SPECIFICATION

GENERATOR ASSEMBLY: 10554892

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for a pulse generator, hereinafter called gate pulse generator, used in the Test Set, Subassembly MX-8048/TPM-22, part of the Radar Test Set AN/TPM-22 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4931

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-T-28800 - Test Equipment for use with Electrical and Electronic Equipment, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the DODSSP - Customer Service, Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (see 6.5)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10554527 - Test Set, Subassembly MX-8048/TPM-22A
10554892 - Gate Pulse Generator Assembly
12950877 - Requirements for Soldering Electrical and Electronic Assemblies

SPECIAL PACKAGING INSTRUCTION

PS 10554892 - Packaging of Gate Pulse Generator Assembly

(Copies of other Government documents, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained. (See contract provisions for additional precedence criteria.)

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10554892, all associated drawings, and with all requirements specified in applicable specifications and drawings. Where applicable, the gate pulse generator assembly shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.

b. Inorganic protective surface finishings.

c. Part identification and marking.

d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The gate pulse generator shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as specified in MIL-T-28800 for Type I, Class 3, Style F test equipment.

3.3.2 Shock. The gate pulse generator shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude operating. The gate pulse generator shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The gate pulse generator shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between +32°F and +131°F.

3.3.4.2 Non-operating (storage). The gate pulse generator shall not suffer permanent damage when subjected to the constant temperature extremes of -60°F for a period of 24 hours and +160°F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The gate pulse generator shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram.

3.5 Performance. When the gate pulse generator is supplied with the input voltages of Table I, application of the input signals of Table I to the gate pulse generator shall cause it to yield the output signals indicated in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE I. Input and output characteristics.

REQUIREMENT	CHARACTERISTIC	TERMINALS
Input voltages +5 V +25 V	5 ± 0.300 Vdc 25 ± 0.300 Vdc	P1-30, 31, 32 (+); P1-24, 25, 26 (RET) P1-55, 56 (+); P1-53, 54 (RET)
Input signal Cp	7.5 MHz ± 1% square wave or sine wave, amplitude 4.3 - 5.2 volts peak-to-peak	P1-43; P1-44 (RET)
Output signals in response to Cp Cp out Cpd out	Same as Cp 7.5 MHz ± 1% square wave, amplitude 4.3 - 5.2 volts peak-to-peak, delayed 20-50 ns from Cp, with 150 ohm load	P1-47; P1-22 (RET) P1-45; P1-22 (RET)
Input signal PRF	20 KHz ± 1% negative pulse (from not less than +3 Vdc level to 0 V and return) approximately 0.6 µsec wide	P1-41, 42; P1-44 (RET)
Output signal in response to PRF	Pulse train 20 KHz ± 1%, pulse width of 250 ± 100 ns. Pulse amplitude not less than +12 V, with a 60 ns maximum rise time and a 150 ohm load	P1-37, 39; P1-52 (RET)
Input signal TARGET PULSE	Same as PRF	P1-14, 15; P1-44 (RET)
Output signal in response to TARGET PULSE	Pulse train 20 KHz ± 1%, pulse width of 250 ± 100 ns. Pulse amplitude not less than +12 V with a 60 ns maximum rise time and a 150 ohm load	P1-17, 18; P1-22 (RET)

NOTE: Input frequencies need not be exactly those given above. However, output frequency of given signal should be same as frequency of its corresponding input signal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

3.6 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the requirements of Note 2 of Drawing 12950877.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. Unless otherwise specified herein, the provisions of MIL-F-13926 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Special sampling inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50°F to +90°F
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches Hg

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in the quantities indicated.

Name	Drawing	Quantity
Generator Assembly	10554892	1

4.3.2 Inspections to be performed As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in this detail specification (see Table II, Functional tests and Table III, Special sampling) and be inspected for compliance with any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of an assembly, component or test specimen to comply with any of the requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term “inspection lot” is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

a. Classification of characteristics. Quality conformance examinations and tests are specified in the following Classification of Characteristics paragraphs. The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing and specification requirements utilizing as a minimum the conformance criteria specified.

b. Alternative quality conformance provisions. Unless otherwise specified herein or provided for in the contract, alternative quality conformance procedures, methods or equipment, such as statistical process control, tool control, other types of sampling plans, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions herein. Prior to applying such alternative procedures, methods or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.6). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified ' quality conformance provisions(s) herein. In case of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or inspection system, as applicable.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies, and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

TABLE II. Functional tests (100 percent inspection).

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major 101. Electrical 102. Performance	 3.4 3.5	 4.7.2 4.7.3
Minor	None	N/A

4.5 Special sampling. One gate pulse generator out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table II and shall then meet the requirements and tests in Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE III. Special sampling.

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity (nonoperating)	3.3.5	4.7.1.5
Minor	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test, as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.4.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the “Methods of Inspection” specified in 4.7 of this specification and with the component inspection procedures specified in “Examination” and “Test Facilities” requirements of MIL-F-13926 wherever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

prescribed product tolerance limit. Thus , concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.4.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the standard test equipment listed in Table IV (Test equipment list) shall be utilized in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE IV. Test equipment list.

Item Number	Description
1. Power supply	5.0 ± 0.3 Vdc, regulated; ac ripple less than 50 mV peak-to-peak; capacity 300 mA
2. Power supply	25.0 ± 0.3 Vdc, regulated; ac ripple less than 100 mV peak-to-peak; capacity 500 mA
3. Signal generator	7.5 MHz square wave or sine wave, amplitude 5.0 ± 0.2 V peak-to-peak, into 50 ohm load
4. Oscilloscope	Dual channel, vertical passband DC to 15 MHz. Rise time of scope plus measuring probe 10 nanoseconds or less. Sweep period 50 nanoseconds per centimeter or less. Input resistance greater than 8 megohms. Input capacitances less than 25 picofarads.
5. Pulse generator	20 KHz pulse train. Negative going pulses from +3 Vdc level to 0 V and return, into 150 ohms, approximately 0.6 µsec wide.
6. Test harness	See Figure 1. See Table V for parts list.


Source: https://assist.dla.mil -- Downloaded: 202610-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE V. Parts list for test harness.

DESIG.	PART	DESCRIPTION
P1	Connector	Malco 5803232-1, Elco 07-5422-0198-01, or equivalent
S1	Switch	SPDT
S2	Switch	Rotary, three-position
R1	Resistor	150 ohms, 3 W
R2	Resistor	150 ohms, 3 W
R3	Resistor	150 ohms, 3 W

NOTE: Wire, mounting hardware, per Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

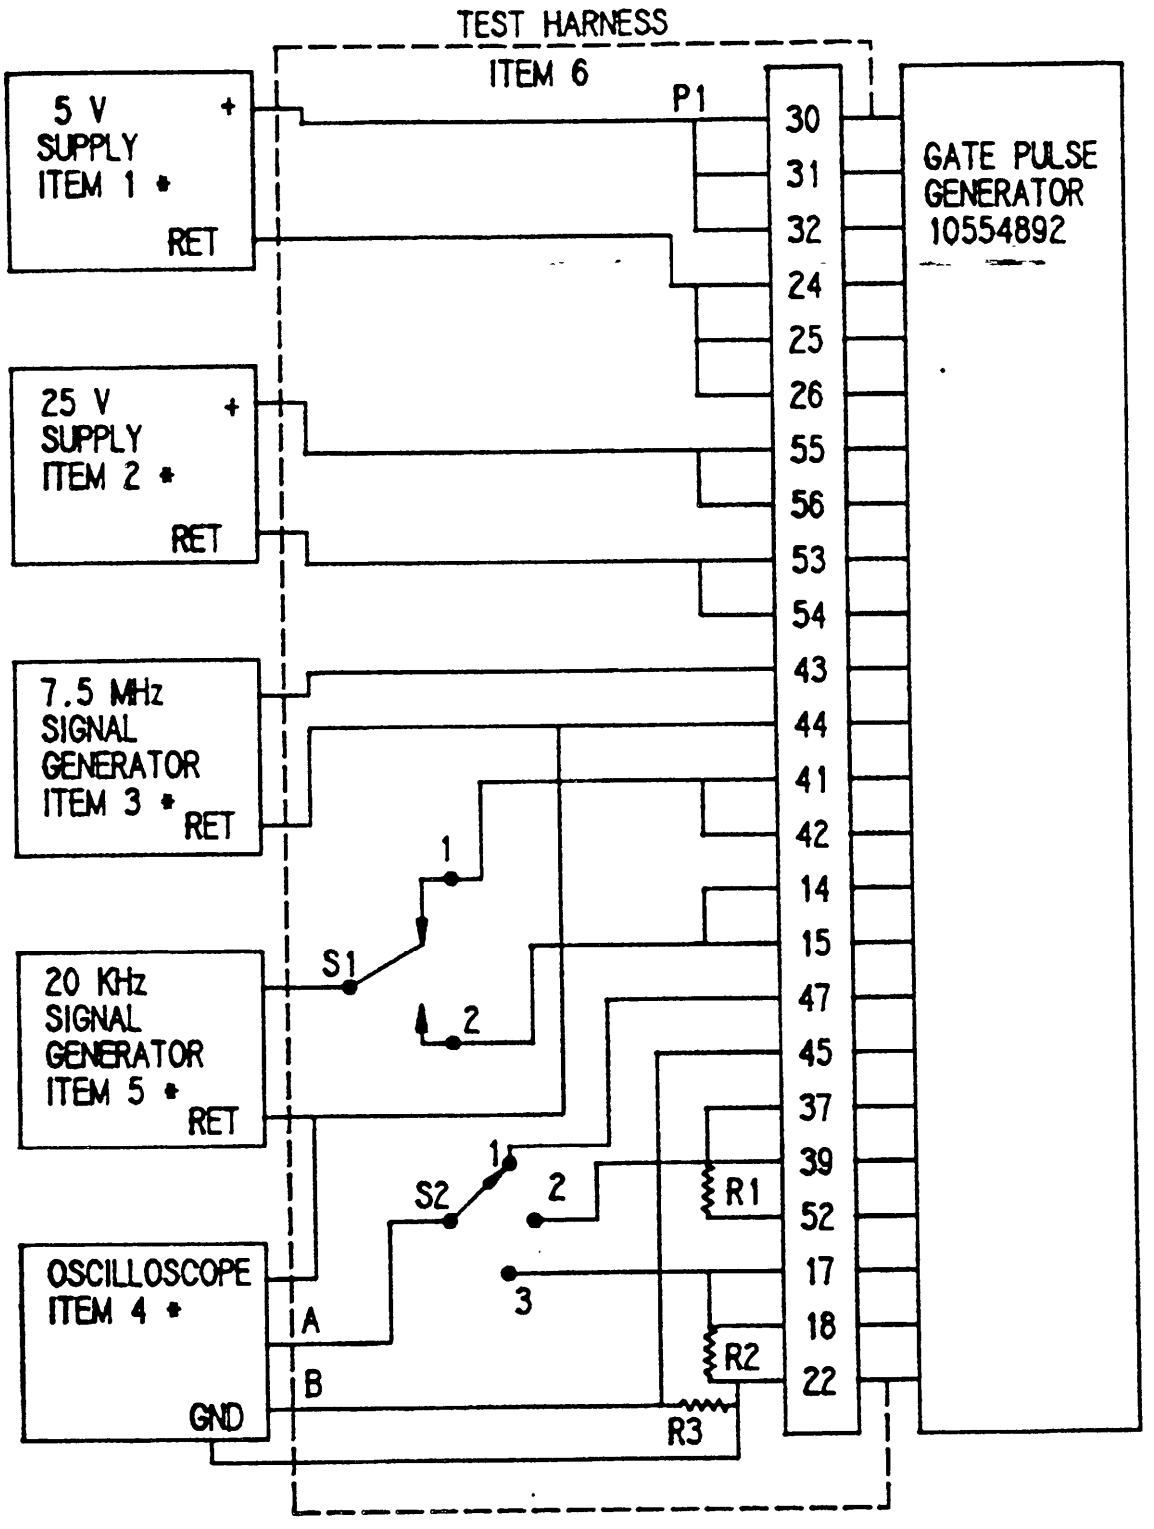

* Refer to 4.6.2.3.

FIGURE 1. Test set for gate pulse generator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. This test shall be performed as specified in MIL-T-28800 for Type I, Class 3, Style F test equipment with the exception of Step 4.c Resonance Dwell does not apply. The gate pulse generator shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the gate pulse generator shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock . This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g’s ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the gate pulse generator shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating). This test shall be performed as specified in Procedures II, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4,7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (see Table IV) and visual examination for compliance with 3.4.

4.7.3 Performance. Adjust power supplies (Table IV, items 1 and 2) to deliver outputs specified in Table I as +5 V and +25 V, respectively. Turn off power supplies. Adjust signal generators (Table IV, items 3 and 5) to delivery outputs specified in Table I as Cp and PRF, respectively. Turn off signal generators. Connect test equipment as shown in Figure 1. Turn test harness (Table IV, item 6) switch S1 to position 1. Turn test harness switch S2 to position 1. Insert gate pulse generator into connector P1 of test harness. Turn on power supplies and signal generators. For measurement of rise time and pulse width see Figure 2A. Measurement of delay time, see Figure 2B.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:22Z
Check the source to verify that this is the current version before use.

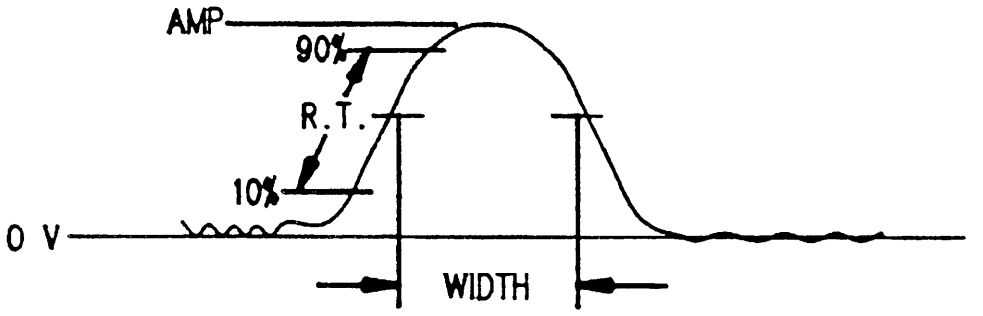


FIGURE 2A. Rise time and pulse width.

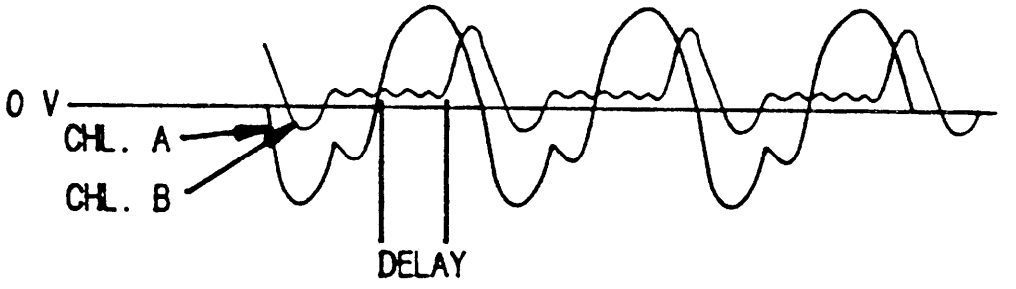


FIGURE 2B. Delay time.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:22Z
Check the source to verify that this is the current version before use.

a. Adjust oscilloscope (Table IV, item 4) and check that A channel signal meets requirements of “Cp out” of Table I.

b. Adjust oscilloscope and check that B channel signal meets requirements of “Cpd out” of Table I.

c. Turn switch S2 to position 2. Adjust oscilloscope and check that A channel signal meets requirements of “Output signal in response to PRF" of Table I.

d. Turn switch S1 to position 2 and switch S2 to position 3. Check that A channel signal on oscilloscope meets requirements of “Output signal in response to TARGET PULSE” of Table I.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of Note 2 of Drawing 12950877 as specified in paragraph 3.7.

5. PACKAGING

5.1 General. Presentation, packing and marking shall be in accordance with Packaging Data Sheet PS 10554892. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The gate pulse generator is used in Test Set, Subassembly MX-8048/TPM-22, part of Radar Test Set AN/TPM-22. The gate pulse generator amplifies two 20 KHz signals, and provides a small delay in a 7.5 MHz signal, all of which are used elsewhere in Test Set, Subassembly MX-8048/TPM-22.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification

b. Issue of DODISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.1.1).

c. Requirements for submission of first article sample.

d. Applicable stock number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

e. Packaging requirements, if other than specified in Section 5.

f. Serialization requirements, if applicable.

g. Certificate of conformance for each lot or shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Submission of alternative quality conformance provisions. All contractor proposed alternative quality conformance provisions will be submitted to the Government for evaluation/approval as directed by the contracting activity.

6.6 Subject term (key word) listing.

Radar Set, AN/TPM-22
Test Set, MX-4048/TPM-22

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 4931-A693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-G-50349B (AR)	21 December 1995

3. DOCUMENT TITLE: Generator Assembly: 10554892

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (*YYMMDD*)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (*Include Area Code*)
US Army, ARDEC	(1) Commercial 201 724-6626 (2) AUTOVON DSN 880-6626
DDRESS (*Include Zip Code*) SMCAR-BAC-S Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.