[INCH-POUND]
A-A-59696
1 October 2001

COMMERCIAL ITEM DESCRIPTION

COIL, RF, CHIP, FIXED, LOW PROFILE, SURFACE MOUNT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a radio frequency coil. Coils covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

AA59696	-	001		F
CID number		Dash number (see table I)		Inductance Tolerance (see table II)

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Coils supplied to this CID shall be as specified herein. (see figure 1).

3.2. Electrical characteristics. The electrical characteristics shall be as specified in table I.

3.3 Weight. The weight shall be no greater than 0.5 gram maximum.

3.4 Operating temperature range. The operating temperature range is –40°C to +125°C.

3.5 Temperature rise. DC current rating for a 15°C rise.

3.6 Altitude. The maximum altitude is 70,000 feet.

3.7 Marking. Coils supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0557, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5950

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

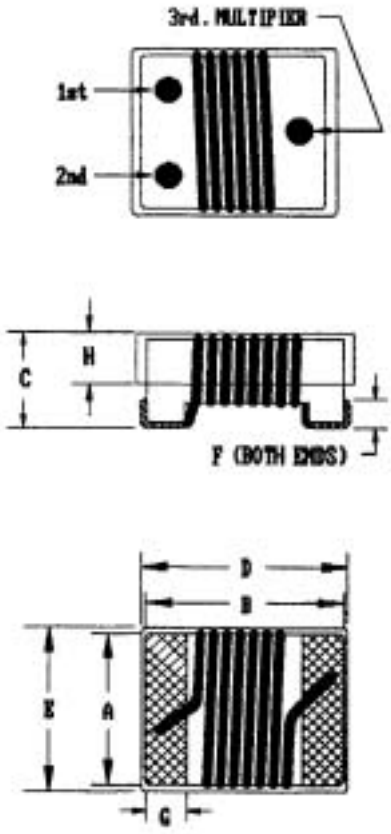

Dimension	INCHES	MM
A	.076 - .084	1.93 – 2.13
B	.095 - .105	2.41 – 2.67
C	.055 Max.	1.40 Max.
D	.115 Max.	2.92 Max.
E	.110 Max.	2.79 Max.
F	.010 - .025	0.25 – 0.64
G	.015 - .025	0.38 – 0.64
H	.020 Ref.	0.508 Ref.

NOTES:

1. Dimensions are in Inches.
2. Metric equivalents are listed for general information only.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

CID dash number AA59696-	Inductance (nH) (@ 50 MHz)	Tolerance (±%)	Q min (@ 500MHz)	SRF min (MHz)	DCR Max (Ohms)	I_{DC}Max (mA)
001	4.7	20, 10, 5	42	7500	.15	600
002	8.2	20, 10, 5	50	5000	.22	600
003	15	20, 10, 5	57	3000	.22	600
004	20	20, 10, 5	72	2400	.33	600
005	30	20, 10, 5, 2	69	2400	.38	600
006	40	20, 10, 5, 2	67	2000	.43	600
007	50	10, 5, 2	72	1900	.48	600
008	60	10, 5, 2, 1	75	1800	.52	600
009	70	10, 5, 2, 1	68	1700	.55	510
010	80	10, 5, 2, 1	75	1400	.56	510
011	90	10, 5, 2	85	1400	.61	500
012	100	10, 5, 2	60	1000	.63	480

TABLE II. Inductance tolerances

Code	Tolerance (percentage)
F	±1
G	±2
J	±5
K	±10
M	±20

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these inductors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.4 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
02113	Coilcraft Inc 1102 Silver Lake Road Cary, Illinois 60013-1658 Phone number (847) 639-2361 Uniform Resource Locator (URL): www.coilcraft.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

7.5 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE III. P/N supersession data. 1/

CID dash number (see table I) AA59696-	Vendor commercial PIN 2/ CAGE 02113
001*	1008CT-040-X*B*
002*	1008CT-080-X*B*
003*	1008CT-150-X*B*
004*	1008CT-200-X*B*
005*	1008CT-300-X*B*
006*	1008CT-400-X*B*
007*	1008CT-500-X*B*
008*	1008CT-600-X*B*
009*	1008CT-700-X*B*
010*	1008CT-800-X*B*
011*	1008CT-900-X*B*
012*	1008CT-101-X*B*

1/ When "*" is used for coded values, it's the contractors responsibility to select those options allowed by the CID.

2/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.6 Government users. To acquire information on obtaining these coils from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CPAA, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7741.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - CC

Project 5950-1064

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.