[INCH-POUND]
A-A-59701/3A
May 5, 2006
SUPERSEDING
A-A-59701/3
October 22, 2001

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# WRIST STRAP, SINGLE CONDUCTOR, ADJUSTABLE, THERMOPLASTIC, ELECTROSTATIC DISCHARGE WITH OPTIONAL GROUNDING CORD

The General Services Administration has authorized the use of this commercial Item Description for all federal agencies.

The complete requirements for procuring the wrist straps described herein shall consist of this document and the issue in effect of CID A-A-59701.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

| AA59701 | /03 | - | 001 | C |
|---|---|---|---|---|
| CID number | Applicable CID specification sheet (two digits) | | Dash number (see table I) | Grounding cord (C) Coiled 5-foot (1.5 m) grounding cord supplied. Blank for no grounding cord supplied. |

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Wrist straps supplied to this CID specification sheet shall meet or exceed the application requirements of ESD S1.1, ANSI/ESD S20.20 and JESD625-A (see figure 1).

Interior wrist strap insert. This wrist strap shall have an integrally molded conductive interior insert.

Exterior wrist strap material. The wrist strap's exterior material shall be molded insulative thermoplastic.

Wrist strap color. The wrist strap color shall be as specified in table I.

Wrist strap size. The wrist strap shall be adjustable to a wrist size of 5.3 inch to 8.5 inch (135 mm to 216 mm) in circumference.

Single conductor. This wrist strap shall be of the single conductor type.

Male snap size. This male snap shall be as specified in table I.

Coiled grounding cord. If a single conductor, coiled grounding cord is provided, the following shall apply.

Grounding cord length. The minimum working length of the grounding cord shall be 5 feet (1.5 m).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

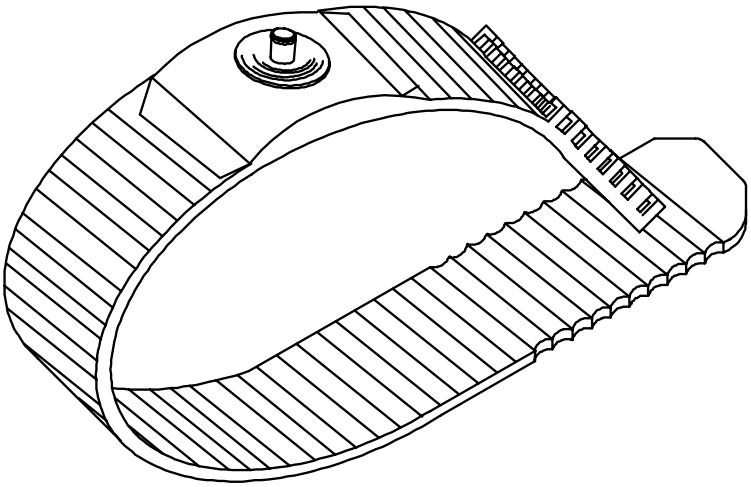

FIGURE 1. Configuration and dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

| CID dash number AA59701/03- | Male snap size | Color | Grounding cord |
|---|---|---|---|
| 001 | 4 mm | Blue | No grounding cord included. |
| 001C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 002 | 4 mm | Green | No grounding cord included. |
| 002C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 003 | 4 mm | Purple | No grounding cord included. |
| 003C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 004 | 4 mm | Maroon | No grounding cord included. |
| 004C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 005 | 4 mm | Lime | No grounding cord included. |
| 005C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 006 | 7 mm | Blue | No grounding cord included. |
| 006C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 007 | 7 mm | Green | No grounding cord included. |
| 007C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 008 | 7 mm | Purple | No grounding cord included. |
| 008C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 009 | 7 mm | Maroon | No grounding cord included. |
| 009C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 010 | 7 mm | Lime | No grounding cord included. |
| 010C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 011 | 10 mm | Blue | No grounding cord included. |
| 011C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 012 | 10 mm | Green | No grounding cord included. |
| 012C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 013 | 10 mm | Purple | No grounding cord included. |
| 013C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 014 | 10 mm | Maroon | No grounding cord included. |
| 014C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |
| 015 | 10 mm | Lime | No grounding cord included. |
| 015C | | | Supplied with a 5-foot (1.5 m) coiled grounding cord. |

Resistance end-to-end. The resistance end-to-end of the grounding cord shall be 1M ohm ±20 percent.

Tensile strength. The grounding cord shall have a tensile strength greater than 15 pounds.

Average termination flex life. The average termination flex life of the grounding cord shall be greater than 200,000 flexes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Alligator clip. All coiled grounding cords shall be supplied with an alligator clip, which fits over the installed banana jack, to provide an alternative ground attachment method.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Source of document.

Other Publications

ELECTROSTATIC DISCHARGE ASSOCIATION (ESD)

ESD S1.1 - Evaluation, Acceptance, and Functional Testing of Wrist Straps.

(Copies of these documents are available online at http://www.esda.org/ or from the Electrostatic Discharge Association, 7900 Turin Road, Building 3, Rome, NY 13440-2069)

AMERICAN NATIONAL STANDARDS INSTITUTE/ELECTROSTATIC DISCHARGE ASSOCIATION (ANSI/ESD)

ANSI/ESD S20.20 - Development of an Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding Electrically Initiated Explosive Devices).

(Copies of these documents are available online at http://www.esda.org/ or from the Electrostatic Discharge Association, 7900 Turin Road, Building 3, Rome, NY 13440-2069)

JEDEC SOLID STATE TECHNOLOGY ASSOCIATION

JESD625-A - Requirements for Handling Electrostatic - Discharge - Sensitive (ESDS) Devices.

(Copies of this document is available online at http://www.jedec.org/ or from the JEDEC Solid State Technology Association, 2500 Wilson Boulevard, suite 220, Arlington, VA 22201-3834)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| MFR's CAGE | MFR's name and address |
|---|---|
| 20999 | 3M Component Handling Solutions<br>Electronic Solutions Division<br>6801 Riverplace Boulevard<br>Austin, TX 78726-9000<br>Phone number (800) 328-1368<br>Facsimile number (800) 858-9136<br>E-mail: mailto:bgcollins1@mmm.com<br>Uniform Resource Locator (URL): http://www.3m.com/ |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

| CID dash number (see table I) AA59701/03 - | MFR's CAGE | MFR's P/N 1/ | CID dash number (see table I) AA59701/03 - | MFR's CAGE | MFR's P/N 1/ |
|---|---|---|---|---|---|
| 001 | 20999 | 98-0798-3488-7 | 008C | 20999 | 98-0798-3510-8 |
| 001C | 20999 | 98-0798-3503-3 | 009 | 20999 | 98-0798-3496-0 |
| 002 | 20999 | 98-0798-3489-5 | 009C | 20999 | 98-0798-3511-6 |
| 002C | 20999 | 98-0798-3504-1 | 010 | 20999 | 98-0798-3497-8 |
| 003 | 20999 | 98-0798-3490-3 | 010C | 20999 | 98-0798-3512-4 |
| 003C | 20999 | 98-0798-3505-8 | 011 | 20999 | 98-0798-3498-6 |
| 004 | 20999 | 98-0798-3491-1 | 011C | 20999 | 98-0798-3513-2 |
| 004C | 20999 | 98-0798-3506-6 | 012 | 20999 | 98-0798-3499-4 |
| 005 | 20999 | 98-0798-3492-9 | 012C | 20999 | 98-0798-3514-0 |
| 005C | 20999 | 98-0798-3507-4 | 013 | 20999 | 98-0798-3500-9 |
| 006 | 20999 | 98-0798-3493-7 | 013C | 20999 | 98-0798-3515-7 |
| 006C | 20999 | 98-0798-3508-2 | 014 | 20999 | 98-0798-3501-7 |
| 007 | 20999 | 98-0798-3494-5 | 014C | 20999 | 98-0798-3516-5 |
| 007C | 20999 | 98-0798-3509-0 | 015 | 20999 | 98-0798-3502-5 |
| 008 | 20999 | 98-0798-3495-2 | 015C | 20999 | 98-0798-3517-3 |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of A-A-59701.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2006-059

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.