[METRIC]
A-A-59702A
December 7, 2006
SUPERSEDING
A-A-59702
October 26, 2001

COMMERCIAL ITEM DESCRIPTION

FUSE, INCLOSED LINK, SURFACE MOUNT (SM), 350 V AC

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for 350 volts ac surface mount inclosed link fuses. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the PIN as shown in the following example (see 7.1).

| AA59702 | - | 001 |
|---|---|---|
| CID number | | Dash number (see table I) |

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuses supplied to this CID shall be as specified herein (see figure 1).

3.2. Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 350 V ac maximum.

3.4 Short circuit interrupt rating. The short circuit interrupt rating shall be 100 amperes at 350 V ac, 50 amperes at 125 V dc and 450 amperes at 60 V dc.

3.5 Operating temperature. The operating temperature shall be -40°C (-40°F) to +125°C (257°F).

3.6 Physical specifications.

3.6.1 Materials. Fuses shall have a plastic body with tin-lead (95/5) plated Zn, Ni barrier terminations.

3.6.2 Solderability. Fuses shall meet solderability requirements in accordance with method 208 of MIL-STD-202. Non-plated terminal surfaces may not meet MIL-STD-202, method 208.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, P.O. Box 3990, Columbus, OH 43218-3990, or email mailto:CircuitProtect@dscc.dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.




| mm | Inches | mm | Inches |
|---|---|---|---|
| 0.81 | .032 | 4.52 | .178 |
| 1.44 | .057 | 5.59 | .220 |
| 1.50 | .059 | 5.91 | .233 |
| 1.52 | .060 | 7.49 | .295 |
| 3.20 | .126 | 8.76 | .345 |
| 3.81 | .150 | 8.81 | .347 |
| 4.03 | .159 | 10.92 | .430 |

NOTES:

1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerance is ±0.15 mm (.006 inch).

FIGURE 1. Configuration and dimensions.

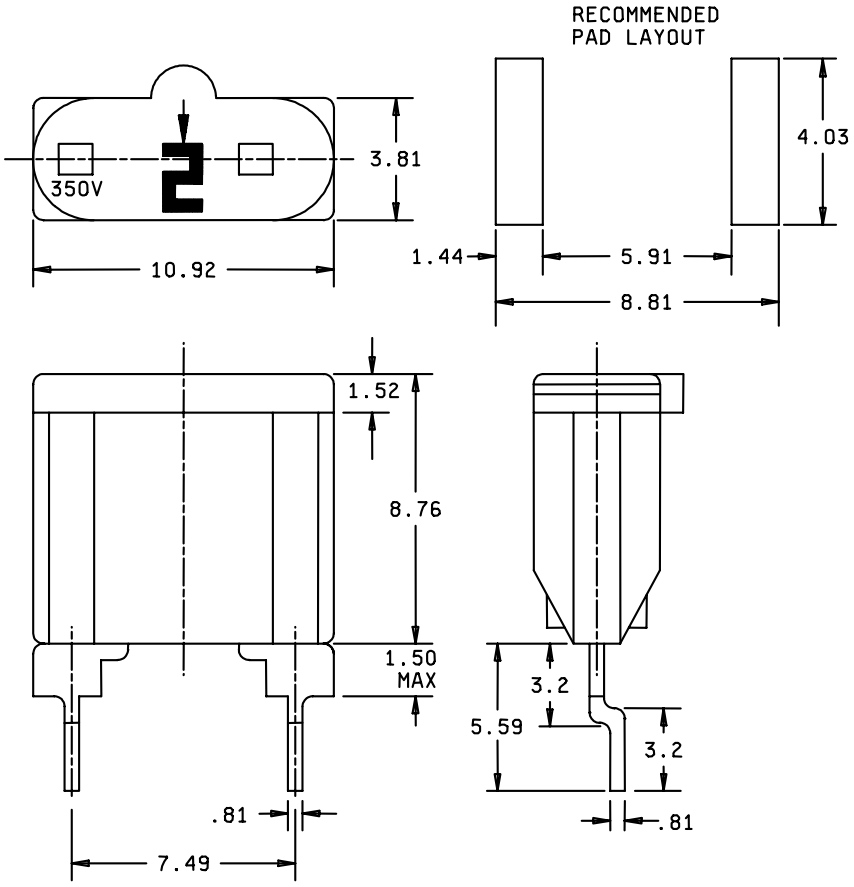

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

| AA59702- | Ampere rating | Nominal cold resistance (Ohms) | Nominal melting $I^2t$ ($A^2$sec.) |
|---|---|---|---|
| 001 | 2 | 0.0560 | 2.8 |
| 002 | 3 | 0.0340 | 9.4 |
| 003 | 4 | 0.0240 | 17 |
| 004 | 5 | 0.0180 | 25 |
| 005 | 7.5 | 0.0110 | 68 |
| 006 | 10 | 0.0073 | 93 |

3.6.3 Soldering parameters. Fuses shall be able to withstand, without electrical or mechanical damage to the fuse, a reflow solder of +235°C (+446°F) for 5 seconds maximum. Wave solder is not recommended.

TABLE II. Rating versus opening time.

| Ampere rating | Percent of ampere rating | Opening time |
|---|---|---|
| All ampere ratings | 100 percent | 4 hours, minimum. |
| | 200 percent | 0.15 second, minimum; 5 seconds maximum. |

3.7 Marking. Fuses supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

3.8 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.9 Workmanship. Fuses shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company producing the item 1,000 units meeting this CID in the commercial marketplace over the past 2 years.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order. In addition, inclosed link fuses may be supplied individually or in a quantity of 800 on a 24 mm (.945 inches) wide tape reel in accordance with EIA-RS 481.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Environmentally preferable materials. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. Table III lists the Environmental Protection Agency's (EPA) top seventeen hazardous materials targeted for major usage reduction. Use of these materials should be minimized or eliminated unless needed to meet the requirements specified herein (see section 3).

TABLE III. EPA top seventeen hazardous materials.

| | | |
|---|---|---|
| Benzene | Dichloromethane | Tetrachloroethylene |
| Cadmium and Compounds | Lead and Compounds | Toluene |
| Carbon Tetrachloride | Mercury and Compounds | 1,1,1 - Trichoroethane |
| Chloroform | Methyl Ethyl Ketone | Trichloroethylene |
| Chromium and Compounds | Methyl Isobutyl Ketone | Xylenes |
| Cyanide and Compounds | Nickel and Compounds | |

7.3 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuses to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.4 Source of documents.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-202 - Electronic and Electrical Component Parts.

(Copies of this document is available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

FEDERAL REGULATIONS

FAR - Federal Acquisition Regulations (FAR).

(Copies of this document is available online at http://www.acquisition.gov/comp/far/index.html or from the U.S. Government Printing Office, 732 North Capital Street, NW, Washington D.C. 20401-0001.)

Other Publications

ELECTRONICS INDUSTRY ASSOCIATION (EIA)

EIA-RS-481- Taping of Surface Mount Components for Automatic Placement.

(Copies of this document is available online at http://www.eia.org/ or from the Electronic Industries Alliance, 2500 Wilson Boulevard, Arlington, VA 22201-3837)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

7.5 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.6 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| MFR's CAGE | MFR's name and address |
|---|---|
| 75915 | Littelfuse Incorporated<br>800 E. Northwest Highway<br>Des Plaines, IL 60016-3096<br>Phone number (847) 824-1188<br>Facsimile number (847) 391-0894<br>E-mail: mailto:electronics@littelfuse.com<br>Uniform Resource Locator (URL): http://www.littelfuse.com |

7.7 Part number (P/N) supersession data. These CID PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE IV. P/N supersession data.

| CID dash number AA59702- (see table I) | MFR's CAGE | MFR's P/N 1/ |
|---|---|---|
| 001 | 75915 | 446002 |
| 002 | 75915 | 446003 |
| 003 | 75915 | 446004 |
| 004 | 75915 | 446005 |
| 005 | 75915 | 44607.5 |
| 006 | 75915 | 446010 |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements see 3.7.

7.8 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CSB, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7435.

7.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2006-082

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.