[INCH-POUND]
A-A-59705/1A
November 2, 2006
SUPERSEDING
A-A-59705/1
November 1, 2001

COMMERCIAL ITEM DESCRIPTION

# FUSE CARTRIDGE, DUAL-ELEMENT, TIME-DELAY, CLASS RK5, 250 VOLTS (V), BLOWN FUSE INDICATION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the issue in effect of CID A-A-59705.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

| AA59705 | /01 | - | 001 |
|---|---|---|---|
| CID number | Applicable CID specification sheet (two digits) | | Dash number |

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID specification sheet shall be as specified herein and shall meet the requirements of UL 248-12 for class RK5, low voltage fuses (see figures 1 and 2).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 250 V ac, 125 V dc maximum.

Interrupting ratings. The interrupting rating shall be 200,000 amperes root means squared (rms) symmetrical, 20,000 amperes dc.

Opening time characteristics. This fuse shall open within 10 seconds minimum at 500 percent of rated current.

Blown fuse indication. This fuse provides blown fuse indication. Location of blown fuse indicator is optional.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.




| AA59705/01- | Dimensions | | | | | | |
|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G |
| 001 through 042 | 2.000 (50.8) | .500 (12.70) | .500 (12.70) | .563 (14.30) | .078 (2.0) | .156 (4.0) | .375 (9.5) |
| 043 through 047 | 3.000 (76.2) | .750 (19.1) | .625 (15.9) | .813 (20.6) | .094 (2.4) | .188 (4.8) | .625 (15.9) |

NOTES:

1. Dimensions are in inches.
2. Tolerance is ± .005 inch (±0.13 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions.

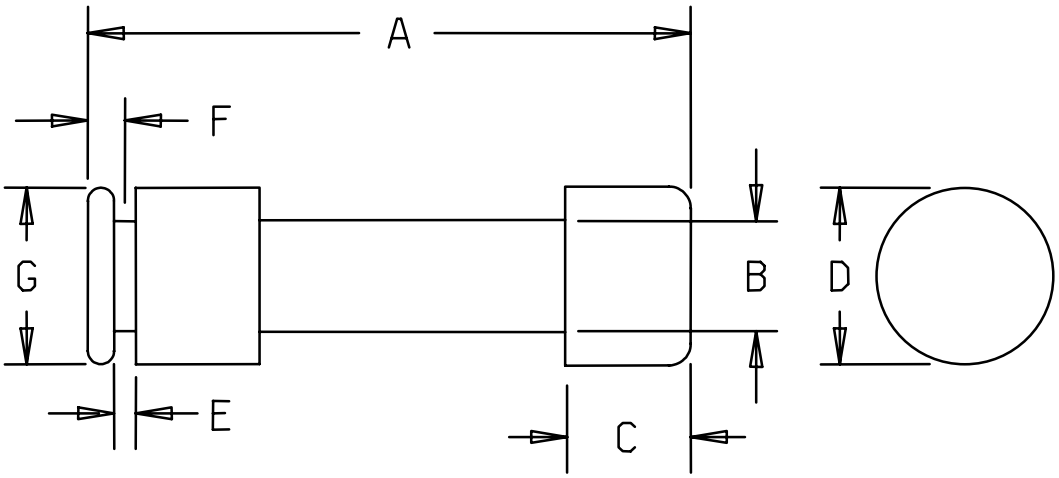

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.




| AA59705/01- | Dimensions | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G | H | J | K |
| 048 through 052 | 5.875 (149.2) | 1.000 (25.4) | 1.063 (27.0) | 1.063 (27.0) | .125 (3.2) | .750 (19.1) | 1.25 (31.8) | .25 (6.4) | .281 (7.1) | .5 (12.7) |
| 053 through 057 | 7.125 (181.0) | 1.5 (38.1) | 1.469 (37.3) | 1.594 (40.5) | .188 (4.8) | 1.125 (28.6) | 1.844 (46.8) | .438 (11.1) | .281 (7.1) | .688 (17.5) |
| 058 through 062 | 8.625 (219.1) | 2.000 (50.8) | 1.938 (49.2) | 2.094 (53.2) | .250 (6.4) | 1.625 (41.3) | 2.344 (59.5) | .625 (15.9) | .406 (10.3) | .937 (23.8) |
| 063 through 065 | 10.375 (263.5) | 2.500 (63.5) | 2.375 (60.3) | 2.594 (65.9) | .250 (6.4) | 2.000 (50.8) | 2.844 (72.2) | .750 (19.1) | .531 (13.5) | 1.125 (28.6) |

NOTES:

1. Dimensions are in inches.
2. Tolerance is ± .005 inch (±0.13 mm), unless otherwise specified.

FIGURE 2. Configuration and dimensions.

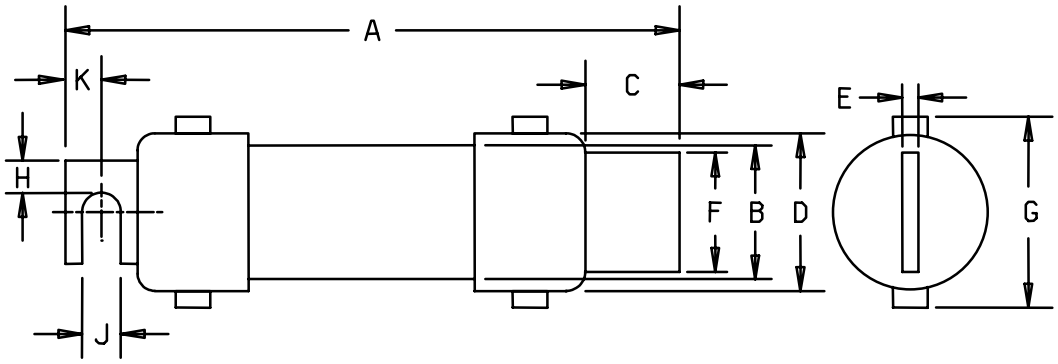

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

| AA59705/01- | Ampere rating | AA59705/01- | Ampere rating | AA59705/01- | Ampere rating |
|---|---|---|---|---|---|
| 001 | 1/10 | 024 | 3 2/10 | 046 | 50 |
| 002 | 1/8 | 025 | 3 1/2 | 047 | 60 |
| 003 | 15/100 | 026 | 4 | 048 | 70 |
| 004 | 2/10 | 027 | 4 1/2 | 049 | 75 |
| 005 | 1/4 | 028 | 5 | 050 | 80 |
| 006 | 3/10 | 029 | 5 6/10 | 051 | 90 |
| 007 | 4/10 | 030 | 6 | 052 | 100 |
| 008 | 1/2 | 031 | 6 1/4 | 053 | 110 |
| 009 | 6/10 | 032 | 7 | 054 | 125 |
| 010 | 8/10 | 033 | 7 1/2 | 055 | 150 |
| 011 | 1 | 034 | 8 | 056 | 175 |
| 012 | 1 1/8 | 035 | 9 | 057 | 200 |
| 013 | 1 1/4 | 036 | 10 | 058 | 225 |
| 014 | 1 4/10 | 037 | 12 | 059 | 250 |
| 015 | 1 1/2 | 038 | 15 | 060 | 300 |
| 016 | 1 6/10 | 039 | 17 1/2 | 061 | 350 |
| 017 | 18/10 | 040 | 20 | 062 | 400 |
| 018 | 2 | 041 | 25 | 063 | 450 |
| 019 | 2 1/4 | 042 | 30 | 064 | 500 |
| 021 | 2 1/2 | 043 | 35 | 065 | 600 |
| 022 | 2 8/10 | 044 | 40 | | |
| 023 | 3 | 045 | 45 | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of document.

Other publications.

Non Government Publications

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 248-12 - Low-Voltage Fuses - Part 12: Class R Fuses.

(Copies of this document is available online at http://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| MFR's CAGE | MFR's name and address |
|---|---|
| 75915 | Littelfuse Incorporated<br>800 E. Northwest Highway<br>Des Plaines, IL 60016-3096<br>Phone number (847) 824-1188<br>Facsimile number (847) 391-0894<br>E-mail: mailto:electronics@littelfuse.com<br>Uniform Resource Locator (URL): http://www.littelfuse.com |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. This CID specification sheet supersedes the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

| CID dash number (see table I) | MFR's CAGE 75915 | CID dash number (see table I) | MFR's CAGE 75915 | CID dash number (see table I) | MFR's CAGE 75915 |
|---|---|---|---|---|---|
| AA59705/01- | MFR's P/N 1/ | AA59705/01- | MFR's P/N 1/ | AA59705/01- | MFR's P/N 1/ |
| 001 | N/A | 024 | N/A | 046 | FLNR 50 ID |
| 002 | N/A | 025 | N/A | 047 | FLNR 60 ID |
| 003 | N/A | 026 | N/A | 048 | FLNR 70 ID |
| 004 | N/A | 027 | N/A | 049 | FLNR 75 ID |
| 005 | N/A | 028 | N/A | 050 | FLNR 80 ID |
| 006 | N/A | 029 | N/A | 051 | FLNR 90 ID |
| 007 | N/A | 030 | N/A | 052 | FLNR 100 ID |
| 008 | N/A | 031 | N/A | 053 | FLNR 110 ID |
| 009 | N/A | 032 | N/A | 054 | FLNR 125 ID |
| 010 | N/A | 033 | N/A | 055 | FLNR 150 ID |
| 011 | N/A | 034 | N/A | 056 | FLNR 175 ID |
| 012 | N/A | 035 | N/A | 057 | FLNR 200 ID |
| 013 | N/A | 036 | N/A | 058 | FLNR 225 ID |
| 014 | N/A | 037 | N/A | 059 | FLNR 250 ID |
| 015 | N/A | 038 | N/A | 060 | FLNR 300 ID |
| 016 | N/A | 039 | N/A | 061 | FLNR 350 ID |
| 017 | N/A | 040 | N/A | 062 | FLNR 400 ID |
| 018 | N/A | 041 | N/A | 063 | FLNR 450 ID |
| 019 | N/A | 042 | N/A | 064 | FLNR 500 ID |
| 021 | N/A | 043 | FLNR 35 ID | 065 | FLNR 600 ID |
| 022 | N/A | 044 | FLNR 40 ID | | |
| 023 | N/A | 045 | FLNR 45 ID | | |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of A-A-59705.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2006-090

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.