[INCH-POUND]
A-A-59705/3A
November 2, 2006
SUPERSEDING
A-A-59705/3
November 1, 2001

COMMERCIAL ITEM DESCRIPTION

FUSE CARTRIDGE, TIME-DELAY, CLASS RK5, 600 VOLTS (V), BLOWN FUSE INDICATION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the issue in effect of CID A-A-59705.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59705	/03	-	001
CID number	Applicable CID specification sheet (two digits)		Dash number

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID specification sheet shall be as specified herein and shall meet the requirements of UL 248-12 for class RK5, low voltage fuses (see figures 1 and 2).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 600 V ac, 600 V dc maximum.

Interrupting ratings. The interrupting rating shall be 200,000 amperes root means squared (rms) symmetrical, 20,000 amperes dc.

Opening time characteristics. This fuse shall open within 10 seconds minimum at 500 percent of rated current.

Blown fuse indication. This fuse provides blown fuse indication. Location of blown fuse indicator is optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

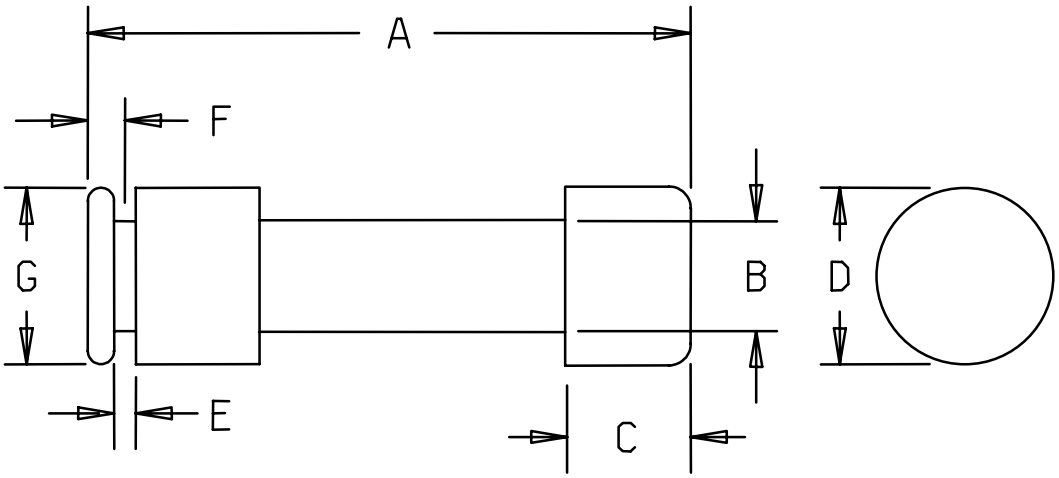

AA59705/03-	Dimensions						
	A	B	C	D	E	F	G
001 through 041	5.000 (127.0)	.75 (19.1)	.625 (15.9)	.813 (20.6)	.094 (2.4)	.188 (4.8)	.625 (15.9)
042 through 046	5.50 (139.7)	1 (25.4)	.625 (15.9)	1.063 (27.0)	.094 (2.4)	.25 (6.4)	.875 (22.2)

NOTES:

1. Dimensions are in inches.
2. Tolerance is ± .005 inch (±0.13 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

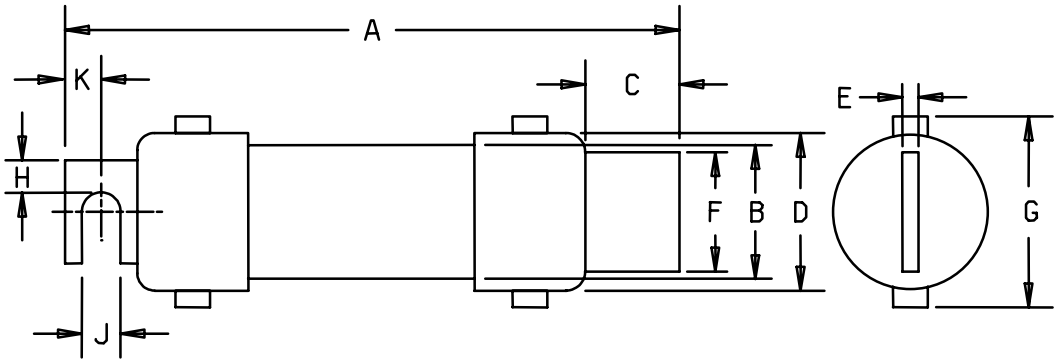

AA59705/03-	Dimensions									
	A	B	C	D	E	F	G	H	J	K
047 through 050	7.875 (200.0)	1.25 (31.8)	1.063 (27.0)	1.313 (33.3)	.125 (3.2)	.750 (19.1)	1.50 (38.1)	.25 (6.4)	.281 (7.1)	.5 (12.7)
051 through 055	9.625 (244.5)	1.75 (44.5)	1.469 (37.3)	1.844 (46.8)	.188 (4.8)	1.125 (28.6)	1.094 (53.2)	.438 (11.1)	.281 (7.1)	.688 (17.5)
056 through 060	11.625 (295.3)	2.5 (63.5)	2 (50.8)	2.594 (65.9)	.250 (6.4)	1.625 (41.3)	2.845 (72.2)	.625 (15.9)	.406 (10.3)	.937 (23.8)
061 through 063	13.375 (339.7)	3 (76.5)	2.406 (61.1)	3.094 (78.6)	.250 (6.4)	2.000 (50.8)	3.344 (84.93)	.750 (19.1)	.531 (13.5)	1.125 (28.6)

NOTES:
1. Dimensions are in inches.
2. Tolerance is ± .005 inch (±0.13 mm), unless otherwise specified.

FIGURE 2. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA59705/03-	Ampere rating	AA59705/03-	Ampere rating	AA59705/03-	Ampere rating
001	1/10	022	3	043	40
002	1/8	023	3 2/10	044	45
003	15/100	024	3 1/2	045	50
004	2/10	025	4	046	60
005	1/4	026	4 1/2	047	70
006	3/10	027	5	048	80
007	4/10	028	5 6/10	049	90
008	1/2	029	6	050	100
009	6/10	030	6 1/4	051	110
010	8/10	031	7	052	125
011	1	032	7 1/2	053	150
012	1 1/8	033	8	054	175
013	1 1/4	034	9	055	200
014	1 4/10	035	10	056	225
015	1 1/2	036	12	057	250
016	1 6/10	037	15	058	300
017	18/10	038	17 1/2	059	350
018	2	039	20	060	400
019	2 1/4	040	25	061	450
020	2 1/20	041	30	062	500
021	2 8/10	042	35	063	600

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of document.

Other publications.

Non Government Publications

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 248-12 - Low-Voltage Fuses - Part 12: Class R Fuses.

(Copies of this document is available online at http://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone number (847) 824-1188 Facsimile number (847) 391-0894 E-mail: mailto:electronics@littelfuse.com Uniform Resource Locator (URL): http://www.littelfuse.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I)	MFR's CAGE 75915	CID dash number (see table I)	MFR's CAGE 75915	CID dash number (see table I)	MFR's CAGE 75915
AA59705/03-	MFR's P/N 1/	AA59705/03-	MFR's P/N 1/	AA59705/03-	MFR's P/N 1/
001	N/A	022	IDSR 3	043	IDSR 40
002	N/A	023	IDSR 3 2/10	044	IDSR 45
003	N/A	024	IDSR 3 1/2	045	IDSR 50
004	N/A	025	IDSR 4	046	IDSR 60
005	N/A	026	IDSR 4 1/2	047	IDSR 70
006	N/A	027	IDSR 5	048	IDSR 80
007	N/A	028	IDSR 5 6/10	049	IDSR 90
008	N/A	029	IDSR 6	050	IDSR 100
009	N/A	030	IDSR 6 1/4	051	IDSR 110
010	N/A	031	IDSR 7	052	IDSR 125
011	IDSR 1	032	IDSR 7 1/2	053	IDSR 150
012	IDSR 1 1/8	033	IDSR 8	054	IDSR 175
013	IDSR 1 1/4	034	IDSR 9	055	IDSR 200
014	IDSR 1 4/10	035	IDSR 10	056	IDSR 225
015	IDSR 1 1/2	036	IDSR 12	057	IDSR 250
016	IDSR 1 6/10	037	IDSR 15	058	IDSR 300
017	IDSR 1 8/10	038	IDSR 17 1/2	059	IDSR 350
018	IDSR 2	039	IDSR 20	060	IDSR 400
019	IDSR 2 1/4	040	IDSR 25	061	IDSR 450
020	IDSR 2 1/2	041	IDSR 30	062	IDSR 500
021	IDSR 2 8/10	042	IDSR 35	063	IDSR 600

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of A-A-59705.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2006-092

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.