[INCH-POUND]
A-A-59714/3A
14 July 2003
SUPERSEDING
A-A-59714/3
15 April 2002

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

RESISTOR, THERMAL, NON-LINEAR THERMISTOR (RESETTABLE FUSE) RADIAL LEADED, STYLE TR

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all agencies.

The complete requirements for procuring the high voltage, resettable fuse device described herein shall consist of this document and the issue in effect of CID A-A-59714.

CLASSIFICATION. This CID uses a classification system that is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA59714	03	-001
CID number	Applicable CID sheet (two digits)	Dash number (see applicable CID sheet)

SALIENT CHARACTERISTICS

Interface and physical dimensions. The resistors supplied to this CID shall meet the interface and physical dimensions as specified herein (see figure 1).

Operating voltage rating. The operating voltage rating shall be 60 V (max).

Hold current. The hold current shall be as specified in table I.

Resistance. The maximum and minimum resistance shall be as specified in table I.

Post trip resistance. The post trip resistance shall be as specified in table I.

Operating ambient temperature. The operating ambient temperature range shall be -40°C to +85°C.

Marking. Thermistors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

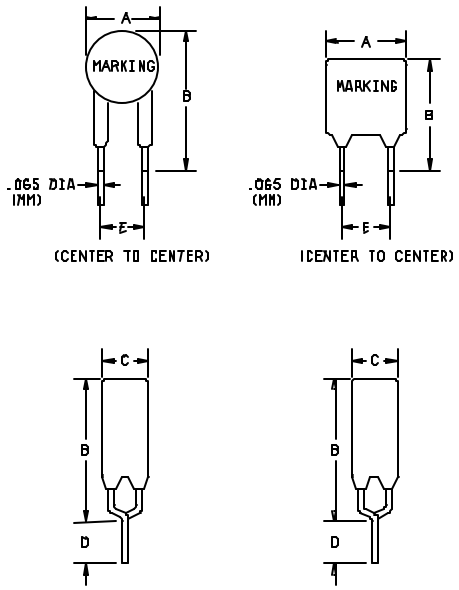

Configuration A Configuration B

Dash number	Dimensions						
	A (max)	B (max)	C (max)	D (min)	D (max)	E (nom)	Configuration
001	0.189 (4.8)	0.366 (9.3)	0.150 (3.8)	0.185 (4.7)		0.197 (5.0)	A
002	0.228 (5.8)	0.390 (9.9)	0.181 (4.6)	0.100 (2.54)	0.152 (3.86)	0.197 (5.0)	A
003	0.210 (5.3)	0.370 (9.4)	0.150 (3.8)	0.185 (4.7)		0.197 (5.0)	A
004	0.236 (6.0)	0.394 (10.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
005	0.236 (6.0)	0.394 (10.0)	0.150 (3.8)	0.185 (4.7)		0.197 (5.0)	B
006	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
007	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
008	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
009	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
010	0.236 (6.0)	0.394 (10.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
011	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
012	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
013	0.410 (10.4)	0.496 (12.6)	0.180 (4.6)	0.185 (4.7)		0.197 (5.0)	B
014	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)		0.197 (5.0)	B
015	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)		0.197 (5.0)	B
016	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)		0.197 (5.0)	B
017	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)		0.197 (5.0)	B
018	0.630 (16.0)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)		0.197 (5.0)	B
019	0.630 (16.0)	0.496 (12.6)	0.236 (6.0)	0.130 (3.3)		0.197 (5.0)	B
020	0.630 (16.0)	0.496 (12.6)	0.236 (6.0)	0.130 (3.3)		0.197 (5.0)	B
021	0.228 (5.8)	0.390 (9.9)	0.181 (4.6)	0.185 (4.7)		0.197 (5.0)	A

NOTES:
1. Millimeters are in parenthesis.

FIGURE 1. Case dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

CID dash number	Hold current (amps)	Voltage (volts) (max)	Current (amps) (max)	Resistance (ohms) (min)	Resistance (ohms) (max)	Post trip resistance (ohms)
001	0.080	250	3	14.0	20	33.0
002	0.080	250	3	15.0	22	33.0
003	0.110	250	3	5.0	9.0	16.0
004	0.120	250	3	6.0	10.0	16.0
005	0.120	250	3	7.0	12.0	16.0
006	0.120	250	3	4.0	8.0	16.0
007	0.120	250	3	6.0	10.5	16.0
008	0.120	250	3	6.0	9.0	16.0
009	0.120	250	3	8.0	10.5	16.0
010	0.145	250	3	3.5	6.5	12.0
011	0.145	250	3	3.0	6.0	14.0
012	0.145	250	3	3.0	5.5	12.0
013	0.180	250	10	0.8	2.0	4.0
014	0.150	600	3	6.0	12.0	22.0
015	0.150	600	3	7.0	10.0	20.0
016	0.150	600	3	9.0	12.0	22.0
017	0.150	600	3	9.0	12.0	22.0
018	0.160	600	3	4.0	10.0	18.0
019	0.160	600	3	4.0	10.0	18.0
020	0.160	600	3	4.0	7.0	18.0
021	0.080	250	3	15.0	22	33.0

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these resistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source of documents.

Commercial Item Description

A-A-59714 - Resistors, Thermal, Non-Linear Thermistor, (Resettable Fuses), General Requirements for.

(Copies of federal specifications and standards are available from the Document Automation and Production Service, Building 4D, (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Ordering data. Ordering data is as specified in A-A-59714.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

TABLE II. Commercial products.

CID PIN	MFR's CAGE	MFR's name and address
AA5971403-***	06090	Tyco Electronics/Raychem Circuit Protection 308 Constitution Drive M/S R21 2A Menlo Park, CA 94025
AA5971403-***	32997	Bourns, Incorporated Circuit Protection Division 1200 Columbia Avenue Riverside, CA 92507-2114
AA5971403-***	0JR59	Wickmann USA, Inc 4100 Shirley Drive SW Atlanta, GA 30336

Part number (P/N) supersession data. This CID supersedes the following manufacturers P/N as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE III. P/N supersession data.

CID dash number AA5971403-	MFR's CAGE	MFR's P/N 1/	CID dash number AA5971403-	MFR's CAGE	MFR's P/N 1/
001		TR250-080U	011		TR250-145
002		TR250-080T-B-1.0-0.125	012		TR250-145-RA-B-0.5
003		TR250-110U	013		TR250-180U
004		TR250-120U	014		TR600-150
005	06090	TR250-120UT-B-0.5	015	06090	TR600-150-RA-B-0.5
006		TR250-120	016		TR600-150-RB
007		TR250-120T-RF-B-0.5	017		TR600-150-RB-B-0.5
008		TR250-120T-R1-B-0.5	018		TR600-160
009		TR250-120T-R2-B-0.5	019		TR600-160-0.130
010		TR250-145U	020		TR600-160-RA-B-0.5-0.130
			021		TR250-080T
001		MF-RX008/250U	012		MF-RX014/250-A05
003		MF-RX011/250U	013		MF-RX018/250U
004		MF-RX012/250U	014		MF-R015/600
005		MF-RX012/250UT-05	015		MF-R015/600-A05
006	32997	MF-RX012/250	016	32997	MF-R015/600-B
007		MF-RX012/250T-F05	017		MF-R015/600-B05
008		MF-RX012/250T-105	018		MF-R016/600
009		MF-RX012/250T-205	019		MF-R016/600-0.13
010		MF-RX014/250U	020		MF-R016/600-A05-0.13
011		MF-RX014/250	021		MF-RX008/250T-1.0-0.125
004		HVR250P120U	013		HVR250P180U
006		HVR250P120C	014		HVR600P150F
010	0JR59	HVR250P145U	018	0JR59	HVR600P160F
011		HVR250P145C	021		HVR250P080C

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

Government users. To acquire information on obtaining these resistors from the Government inventory system, Defense Supply Center, Columbus, ATTN: DSCC-CPB, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7678.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:

DLA - CC

Project 5905-1692-03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.