
FED. SUP CLASS
4730

USER ACTIVITIES: Army - MS,AV
Navy - AS
Air Force - 99

REVIEWER ACTIVITIES: Army - ME,AV
Navy - AS
Air Force - 99
DLA - CS

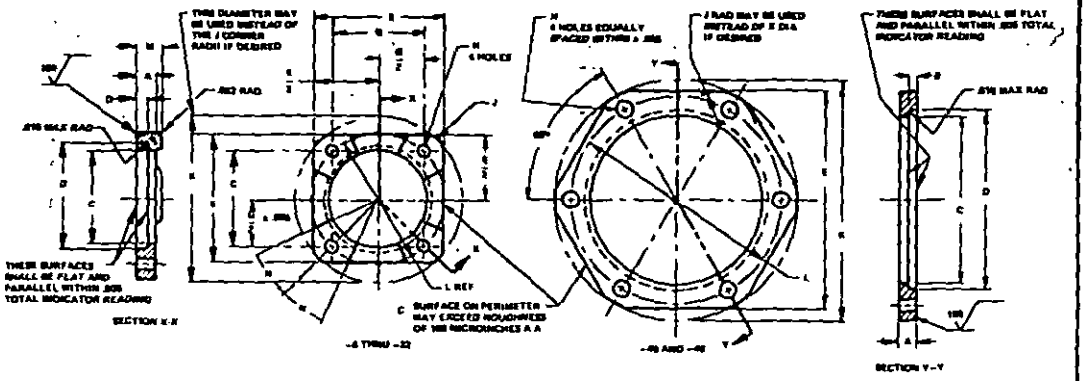

DASH NO. (C) STEEL	AL ALLOY	CRES	TI ALLOY	TUBING OD AND HOSE ID	A +.015 -.005	B +.005 -.000	(a) C +.010 -.000 DIA	(a) D +.005 -.000 DIA	(b) E	
-8	-D8	-J8	-T8	.500	.234	.136	.750	.885	1.390	±.016
-10	-D10	-J10	-T10	.625			.880	1.010	1.468	
-12	-D12	-J12	-T12	.750			1.125	1.260	1.594	
-16	-D16	-J16	-T16	1.000			1.375	1.510	1.750	
-20	-D20	-J20	-T20	1.250			1.688	1.854	2.188	±.020
-24	-D24	-J24	-T24	1.500	.297	.168	1.938	2.135	2.375	
-32	-D32	-J32	-T32	2.000			2.562	2.760	3.000	
-40	-D40	-J40	-T40	2.500			3.062	3.291	4.000	
-48	-D48	-J48	-T48	3.000			3.562	3.791	4.500	

DASH NO. (C) STEEL	AL ALLOY	CRES	TI ALLOY	G ±.005	H +.010 -.000 DIA	(b) J ±.016 RAD	(b) K ±.015 DIA	L ±.005 DIA	M ±.016	N
-8	-D8	-J8	-T8	.950	.205	.219	1.782	1.344	.297	20°
-10	-D10	-J10	-T10	1.038			1.906	1.468		
-12	-D12	-J12	-T12	1.156			2.094	1.635		
-16	-D16	-J16	-T16	1.312			2.312	1.855		18°
-20	-D20	-J20	-T20	1.656	.266	.266	2.875	2.342		16°
-24	-D24	-J24	-T24	1.812		.281	3.094	2.562		
-32	-D32	-J32	-T32	2.375	.328	.312	3.953	3.359	.359	12°
-40	-D40	-J40	-T40			.375	4.500	3.812		
-48	-D48	-J48	-T48			.625	5.000	4.312		

© denotes changes

APPROVED 9 AUG 57 REVISED A 1 APR 59 B 18 JUN 75 C 18 JUN 1979

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. © AIR FORCE-99	INTERNATIONAL INTEREST	TITLE FLANGE, SWIVEL, RETAINING	MILITARY STANDARD
Other Cust: NAVY - AS			MS20756
Procurement Specifications: MIL-F-5509	SUPERSEDES: AN756		SHEET 1 OF 3

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

© WEIGHT MAX (LBS)

DASH NO.	AL ALLOY	STEEL	TI ALLOY
8			
10			
12			
16	.03	.08	
20	.05	.14	
24	.06	.17	
32	.09	.25	
40	.16	.45	
48	.19	.53	

(a) DIAMETERS C AND D SHALL BE CONCENTRIC WITHIN .010 TOTAL INDICATOR READING.
(b) REDUCTION BY FORGING DRAFT ANGLE OF 7° MAXIMUM IS PERMISSIBLE IF FORGED.
FOR TUBE SIZES THRU 1 INCH: MAXIMUM OPERATING TEMPERATURE 275°F; MAXIMUM PRESSURE 1500 PSI.
FOR TUBE SIZES EXCEEDING 1 INCH: MAXIMUM OPERATING TEMPERATURE 275°F; MAXIMUM PRESSURE 500 PSI.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
© MATERIAL: ALUMINUM ALLOY (2014 OR 2024); STEEL; CRES (304); TITANIUM ALLOY (SEE PROCUREMENT DOCUMENT).
© TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
© UNLESS OTHERWISE SPECIFIED, SURFACE ROUGHNESS SHALL NOT EXCEED 100 MICROINCHES AA. (SEE ANSI B46.1).
FINISH: SEE PROCUREMENT DOCUMENT.
FITTINGS SHALL BE PERMANENTLY MARKED WITH MS PART NUMBERS ON AN UNFINISHED SURFACE.
FOR NOMINAL USE ON FUEL AND OIL SYSTEMS.
DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS +.005, ANGLES ±1/2°.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID OR REQUEST FOR QUOTE.

© denotes changes

APPROVED 9 AUG 57 REVISED A 1 APR 59 B 14 JUL 75 C 16 JUN 78

USER ACTIVITIES: Army - ME,AV Navy - AS Air Force - 99

REVIEWER ACTIVITIES: Army - ME,AV Navy - AS Air Force - 99 DLA - CS


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. © AIR FORCE-99 Other Cust NAVY - AS	INTERNATIONAL INTEREST	TITLE FLANGE, SWIVEL, RETAINING	MILITARY STANDARD MS 20756
Procurement Specifications MIL-F-5509	SUPERSEDES: AN756		SHEET 2 OF 3

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS

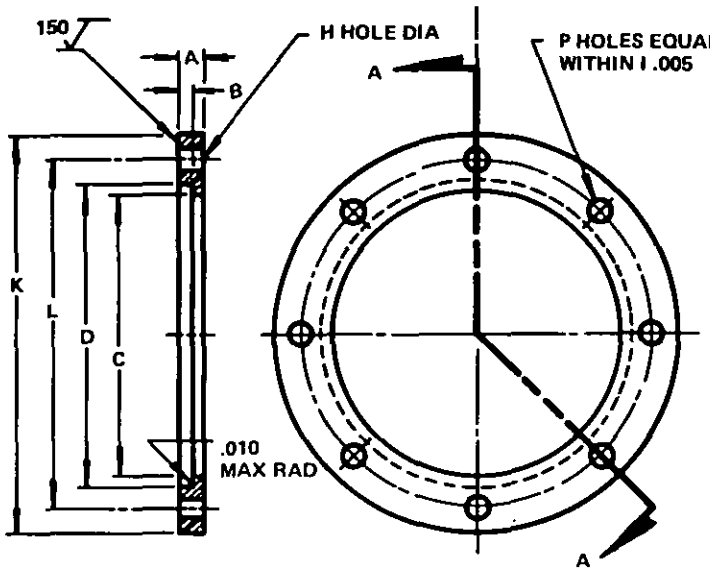

SECTION A–A

–56 THRU –112

DASH NO. (C) STEEL	AL ALLOY	CRES	TI ALLOY	NOMINAL TUBE AND HOSE SIZE	A +.015 -.005	B +.005 -.000	(a) C +.031 -.000 DIA	(a) D DIA	
-56	-D56	-J56	-T56	3.500	.312	.168	3.968	4.234	+.010 -.000
-64	-D64	-J64	-T64	4.000			4.531	4.797	+.010 -.000
-80	-D80	-J80	-T80	5.000	.375	.188	5.531	5.797	+.010 -.000
-96	-D96	-J96	-T96	6.000			6.531	6.797	+.020 -.000
-112	-D112	-J112	-T112	7.000	.437	.200	7.594	7.860	+.020 -.000

DASH NO. (C) STEEL	AL ALLOY	CRES	TI ALLOY	H +.000 -.000 DIA	(b) K ±.015 DIA	L ±.005 DIA	P NO. HOLES
-56	-D56	-J56	-T56	.328	5.562	4.875	8
-64	-D64	-J64	-T64		6.125	5.438	
-80	-D80	-J80	-T80		7.125	6.438	10
-96	-D96	-J96	-T96		8.125	7.438	12
-112	-D112	-J112	-T112		9.188	8.500	14

REVISED © FOR CHANGES SEE PAGES 1 AND 2, 16 JUN 1978

APPROVED 9 AUG 57

© USER ACTIVITIES: Army – ME,AV Navy – AS Air Force – 99

© REVIEWER ACTIVITIES: Army – ME,AV Navy – AS Air Force – 99 DLA–CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. © AIR FORCE – 99	INTERNATIONAL INTEREST	TITLE Flange, Swivel, Retaining	MILITARY STANDARD
Other Cust NAVY – AS			MS 20756
Procurement Specifications MIL-F-5509	SUPERSEDES: AN756		SHEET 3 OF 3

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.