
FED. SUP CLASS.
3010

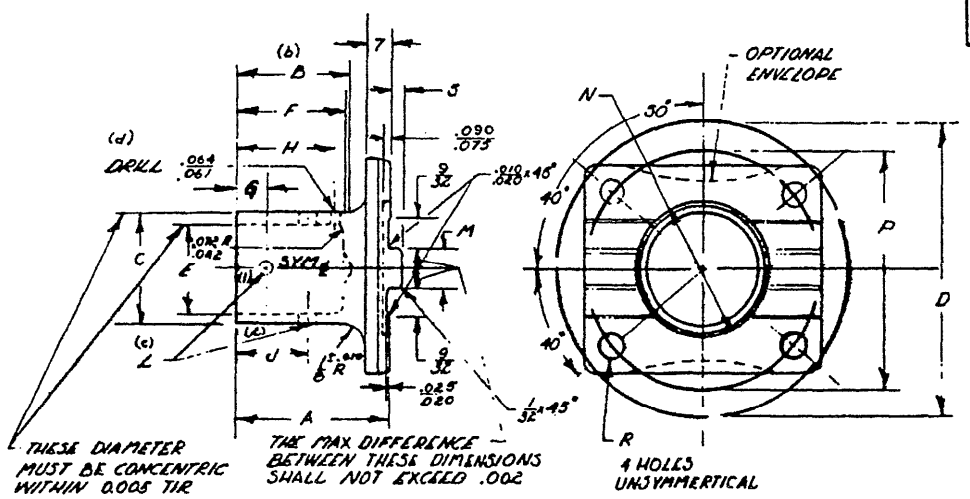

MS PART NO.	(a) FIIN	NOM SIZE	A	B	C DIA +.000 -.002	D SWING DIA	E DIA	F	G	H	J	L PILOT HOLE DRILL
MS24315-12		3/4	1.125	13/16	.745	2 13/16	.625	13/16	.219	.755/.750	.531	5/32
MS24315-16		1	1.375	1 1/16	.995	2 13/16	.812	1	.281	.942/.937	.656	7/32
MS24315-20		1 1/4	1.438	1 1/8	1.245	2 13/16	1.062	1 1/16	.312	1.005/1.000	.688	7/32
MS24315-24		1 1/2	1.656	1 5/16	1.495	3 3/16	1.250	1 3/16	.344	1.130/1.125	.781	9/32
MS24315-28		1 3/4	2.062	1 11/16	1.745	3 9/16	1.375	1 5/16	.531	1.255/1.250	.969	9/32
MS24315-32		2	2.312	1 15/16	1.995	3 9/16	1.625	1 7/16	.656	1.380/1.375	1.094	9/32

NOM SIZE	M	N DIA ±.001	P DIA	R DIA +.005 -.001	S	T
3/4	.3729	1.251	2.250	.203	.125	3/16
1	.3729	1.251	2.250	.203	.125	3/16
1 1/4	.3729	1.251	2.250	.203	.125	3/16
1 1/2	.3729	1.501	2.562	.266	.125	7/32
1 3/4	.4979	1.501	2.937	.266	.155	1/4
2	.4979	1.501	2.937	.266	.155	1/4

(a) FEDERAL ITEM IDENTIFICATION NO.
(b) B DIMENSION IS LENGTH OF STRAIGHT CYLINDRICAL SECTION.
(c) CENTER LINE OF PILOT HOLES (1) SHALL LIE IN A DIRECTION PARALLEL TO THE KEY CENTER LINE OF THE FLANGE WITHIN 0°30'. CENTER LINE OF PILOT HOLES (2) BE PERPENDICULAR TO THE KEY CENTER LINE WITHIN 0°30'.
(d) CENTER LINE OF INSPECTION HOLE SHALL LIE IN A DIRECTION PERPENDICULAR TO THE KEY CENTER LINE OF THE YOKE WITHIN 0°30'.
MATERIAL: SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
REMOVE ALL BURRS AND SHARP EDGES.
ALL DIMENSIONS TO BE MET AFTER PLATING.
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ± 0°15'.
ADD -N BEFORE DASH NO. FOR COUPLINGS WITHOUT PREDRILLED PILOT HOLES.
EXAMPLE OF PART NOS: MS 24315-12 = 3/4 IN. NOMINAL COUPLING WITH PREDRILLED PILOT HOLES.
MS24315-N12 = 3/4 IN NOMINAL COUPLING WITHOUT PREDRILLED PILOT HOLES.
ALL MACHINED SURFACES MUST BE SMOOTH AND FREE FROM TOOL MARKS 150 MAX.
"C" "E" & "N" DIMENSIONS TO BE CONCENTRIC WITHIN 0.005 TIR.
*THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 6 FEBRUARY 1956 REVISED

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS24315
Army - OrD Navy - Bureau Air Force	A - ET N - Os	COUPLING, FLANGE, ROUND HUB	
PROCUREMENT SPECIFICATION MIL-U-5963		SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

INCH-POUND

MS24315
NOTICE 1
5 September 1991

NOTICE
OF VALIDATION

MILITARY STANDARD

COUPLING, FLANGE, ROUND HUB

MS24315, dated 6 February 1956, has been reviewed and determined to be valid for use in acquisition.

Preparing activity:
Navy - AS

Custodians:
Army - ME
Navy - AS
Air Force - 99

AMSC N/A FSC 3120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:52Z
Check the source to verify that this is the current version before use.