FED SUP CLASS
5925

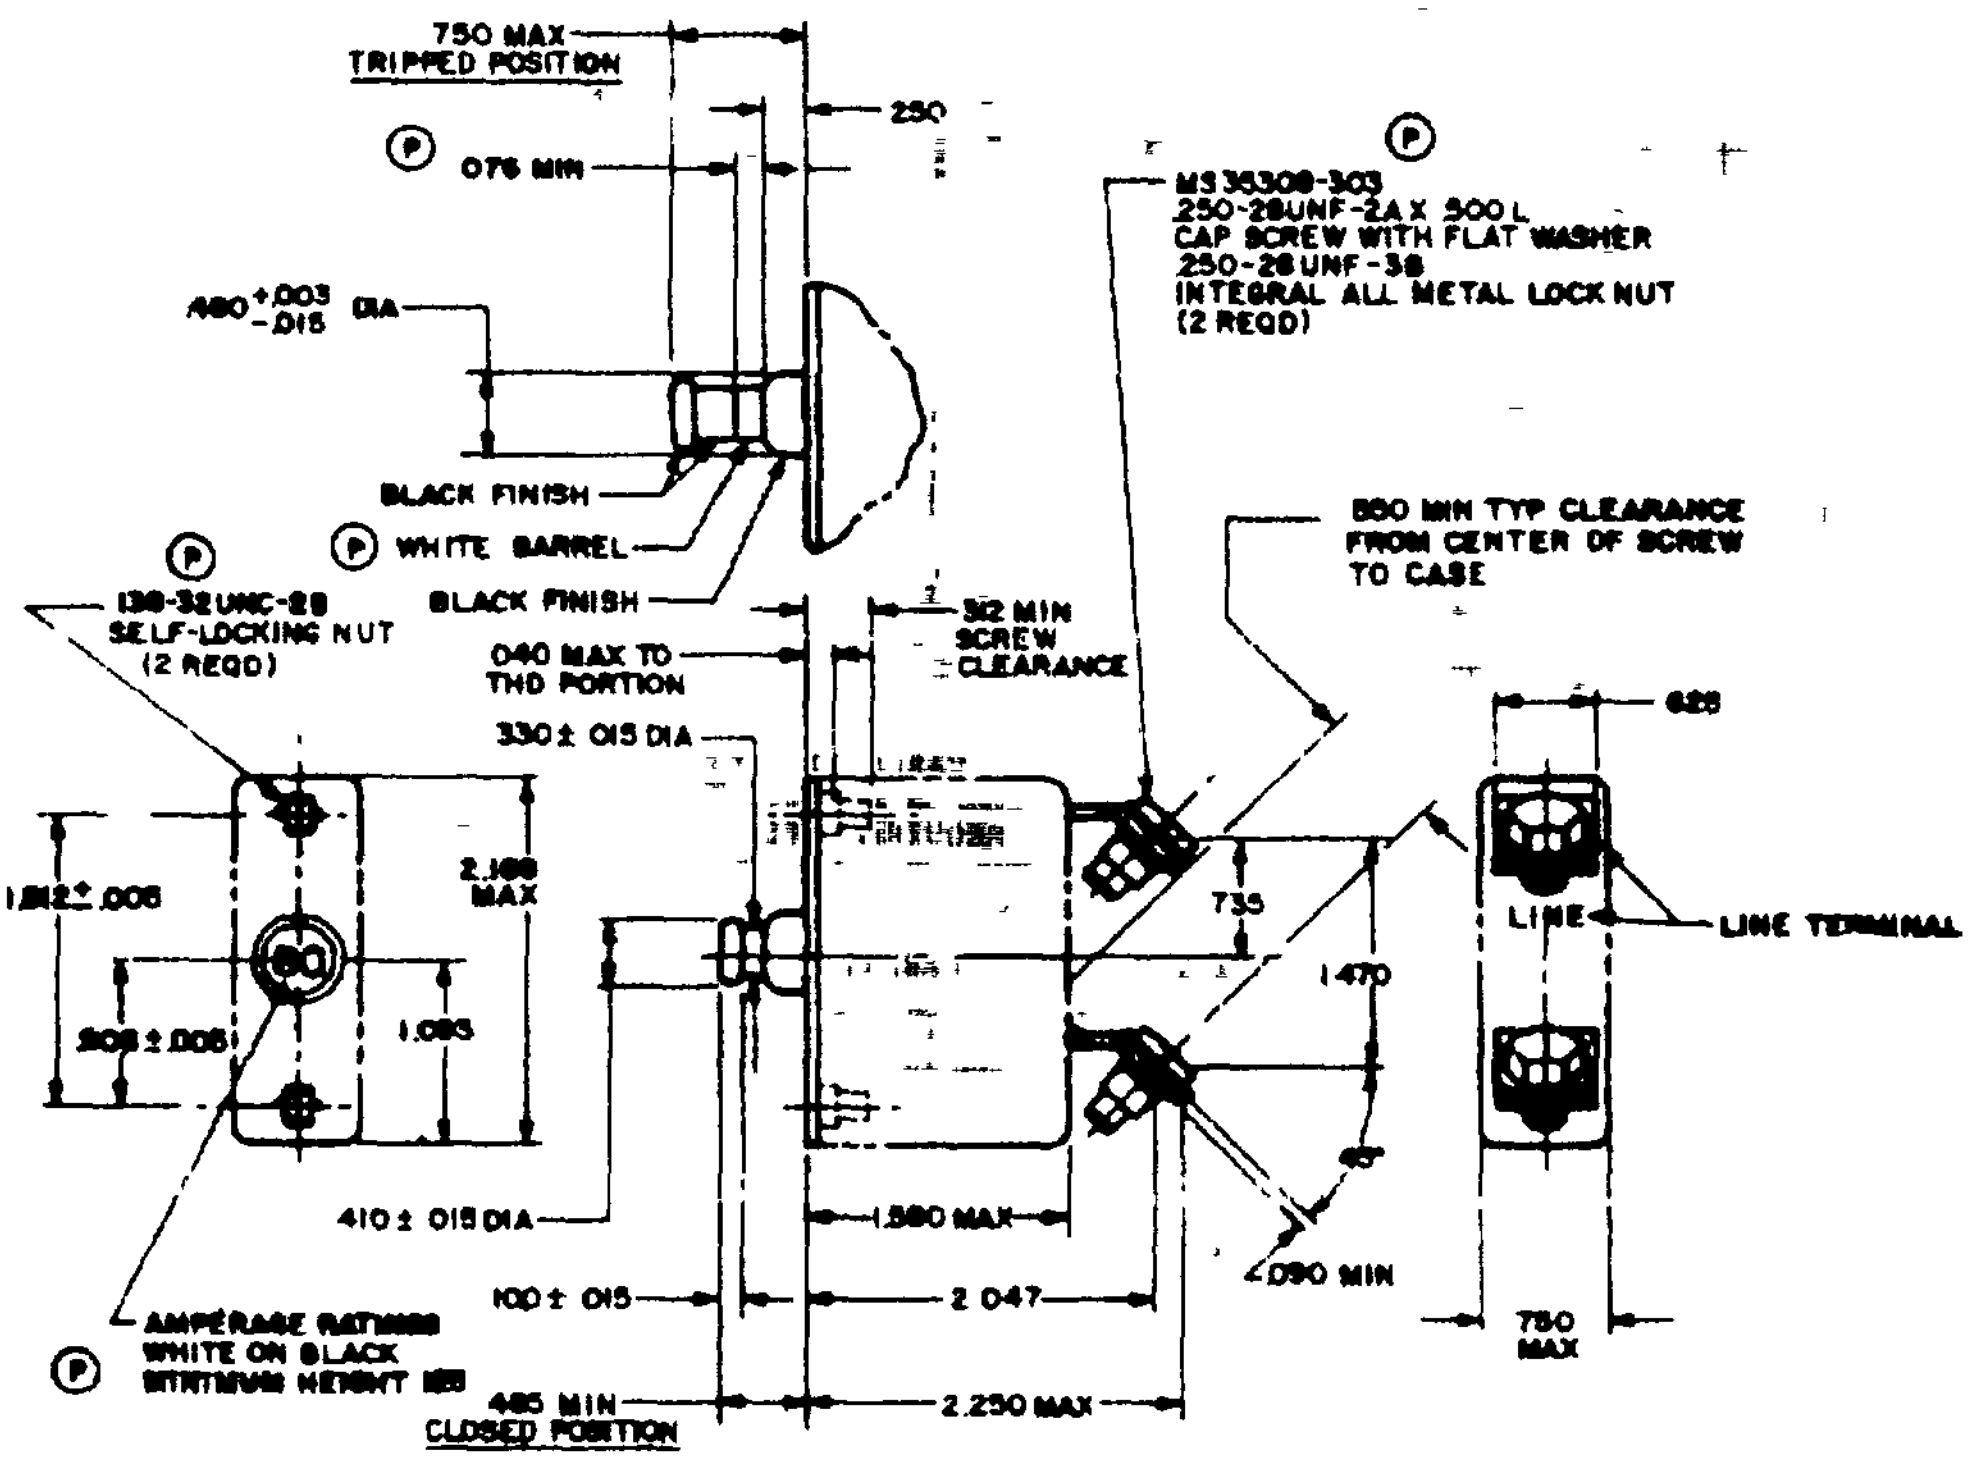

◯ DENOTE[illegible]

APPROVED 14 NOV 58 REVISED Ⓚ 2 DEC 77 Ⓛ 1 SEPT 78 Ⓜ 7 DEC 83 Ⓝ 30 JAN 84 Ⓟ 30 NOV 1987

P[illegible]A NAVY - AS Other Cust USAF - 55 ARMY - EK	INTER NATIONAL INTEREST *	TITLE Circuit Breaker - Aircraft, Trip-Free, Push-Pull, 50 Thru 100 Amp, Type 1	**MILITARY STANDARD** **MS 25361**
PROCUREMENT SPECIFICATION MIL C 5809		SUPERSEDES *MS0025361C(USAF) [illegible]	SHEET 1 OF 3

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AFSC F/A

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
USAF - 11
DESC - ES

USER SYMBOLS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.

FSC 5925

USAF - 11
DESC - ES

TABLE I (P)

ELECTRICAL AND MECHANICAL CHARACTERISTICS

DASH NUMBER	NOMINAL CAPACITY AMPERES (A)	VOLTAGE DROP MAX (V)	WEIGHT MAX (LBS)	OPERATING FORCE MAX (LBS)		ENDURANCE CYCLES				MECH NO LOAD
						RESISTIVE		INDUCTIVE		
				PULLOUT	RESET	AC	DC	AC	DC	
50	50	0.3	0.25	12	16	1/ 5,000	2/ 5,000	1/ 5,000 6 TO 7 LAGGING POWER FACTOR	2/ 2,500	5,000
60	60									
70	70									
75	75									
80	80									
90	90									
100	100									

1/ 400 CYCLE 115/200 VOLT SYSTEM, TESTED AT 120 ±5 VOLTS 380-420 HZ
2/ 28 VOLTS DC SYSTEM TESTED AT 30 ± 2 VOLTS

TABLE II (P)

DETAIL CALIBRATION REQUIREMENTS - TRIP TIME IN SECONDS

NOMINAL CAPACITY AMPERES (A)	25°C					-40°C		+71°C	
	PERCENT RATED CURRENT					PERCENT RATED CURRENT		PERCENT RATED CURRENT	
	105	138	200	400	600	125	165	70	125
50	MUST HOLD - 1 HOUR MIN	MUST TRIP - 1 HOUR MAX	15 TO 65	2 TO 10	1 TO 4	MUST HOLD - 1 HOUR MIN	MUST TRIP - 1 HOUR MAX	MUST HOLD - 1 HOUR MIN	MUST TRIP - 1 HOUR MAX
60									
70									
75									
80									
90									
100									

AMBIENT TEMPERATURE TOLERANCE ±2°C

TABLE III (P)

INTERRUPTING CURRENT (AMPERES) REQUIREMENTS

NOMINAL CAPACITY AMPERES (A)	TEST DESIGNATION PER MIL-C-5809					
	A	B	C	D	E	F
50	3,000	3,500	5,000	6,000	a)12,000 b)[illegible],000 c) 750	a)13,000 b)1,500 c)1,000
60						
70						
75						
80						
90						
100						

(P) FOR CHANGES SEE SHEET 1

APPROVED 14 NOV 58

P.A. NAVY — AS Other Cust USAF - 85 ARMY - ER	INTER-NATIONAL INTEREST (SEE NOTE 4)	TITLE Circuit Breaker - Aircraft, Trip-Free, Push-Pull, 50 Thru 100 Amp, Type I	MILITARY STANDARD MS25361
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES: MS00253b(USAF)	SHEET 2 OF 3

DD FORM 672-1 (Coordinated)

FED SUP CLASS
5925

TABLE IV (P)

ENVIRONMENTAL PERFORMANCE	
MAX OPERATING ALTITUDE-FT	70,000
OPERATING AMBIENT TEMP RANGE	-40°C TO +71°C
VIBRATION - IN ACCORDANCE WITH MIL-C-5809	SINE - REQUIRED HIGH LEVEL SINE (OPTION) RANDOM (OPTION)
SHOCK	30G MIL-STD-202 METHOD 213-TEST METHOD J
ACCELERATION	10G

NOTES

1 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCE DECIMALS ± 031; ANGLES ±2°

2 REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED

3 FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

4 CERTAIN PROVISIONS OF THE STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC 12/3 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED

5 VOLTAGE RATING 28VDC NOMINAL OR 115V 400 HZ NOMINAL

REQUIREMENTS

1 PHANTOM LINES INDICATE CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED

2 TERMINAL SCREW TIGHTENING TORQUE 40 LB-IN MAX

3 CIRCUIT BREAKERS ARE DESIGNED TO BE NON-RECYCLING PER MIL-C-5809

4 THE PART NUMBER FOR CIRCUIT BREAKERS IN ACCORDANCE WITH THIS SPECIFICATION SHALL CONFORM TO THE EXAMPLE BELOW

MS25361-D75V

- V — HIGH VIBRATION CAPABILITY (OPTION)
- 75 — AMPERE RATING
- D — RANDOM VIBRATION LEVEL (OPTION)
- MS25361 — BASIC PART STYLE

WHEN A DESIGNATOR IS NOT APPLICABLE IT SHALL
BE OMITTED FROM THE PART NUMBER

APPROVED 14 NOV 78   REVISED (P)   FOR CHANGES SEE SHEET 1

USER SYMBOLS

CUSTODIAN SYMBOLS
USAF - 11
DESC - ES

These/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY — AS Other Cust USAF - 85 ARMY ER	INTER-NATIONAL INTEREST (SEE NOTE4)	TITLE Circuit Breaker - Aircraft, Trip-Free, Push-Pull, 50 Thru 100 Amp, Type I	MILITARY STANDARD MS25361
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES: MS[illegible](USAF)	SHEET 3 OF 3

DD FORM 1 MAR 71 672-1 (Continued)   PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE   PLATE NO. [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.