FED. SUP CLASS
4730

User Activities:
Army-WC, ME, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

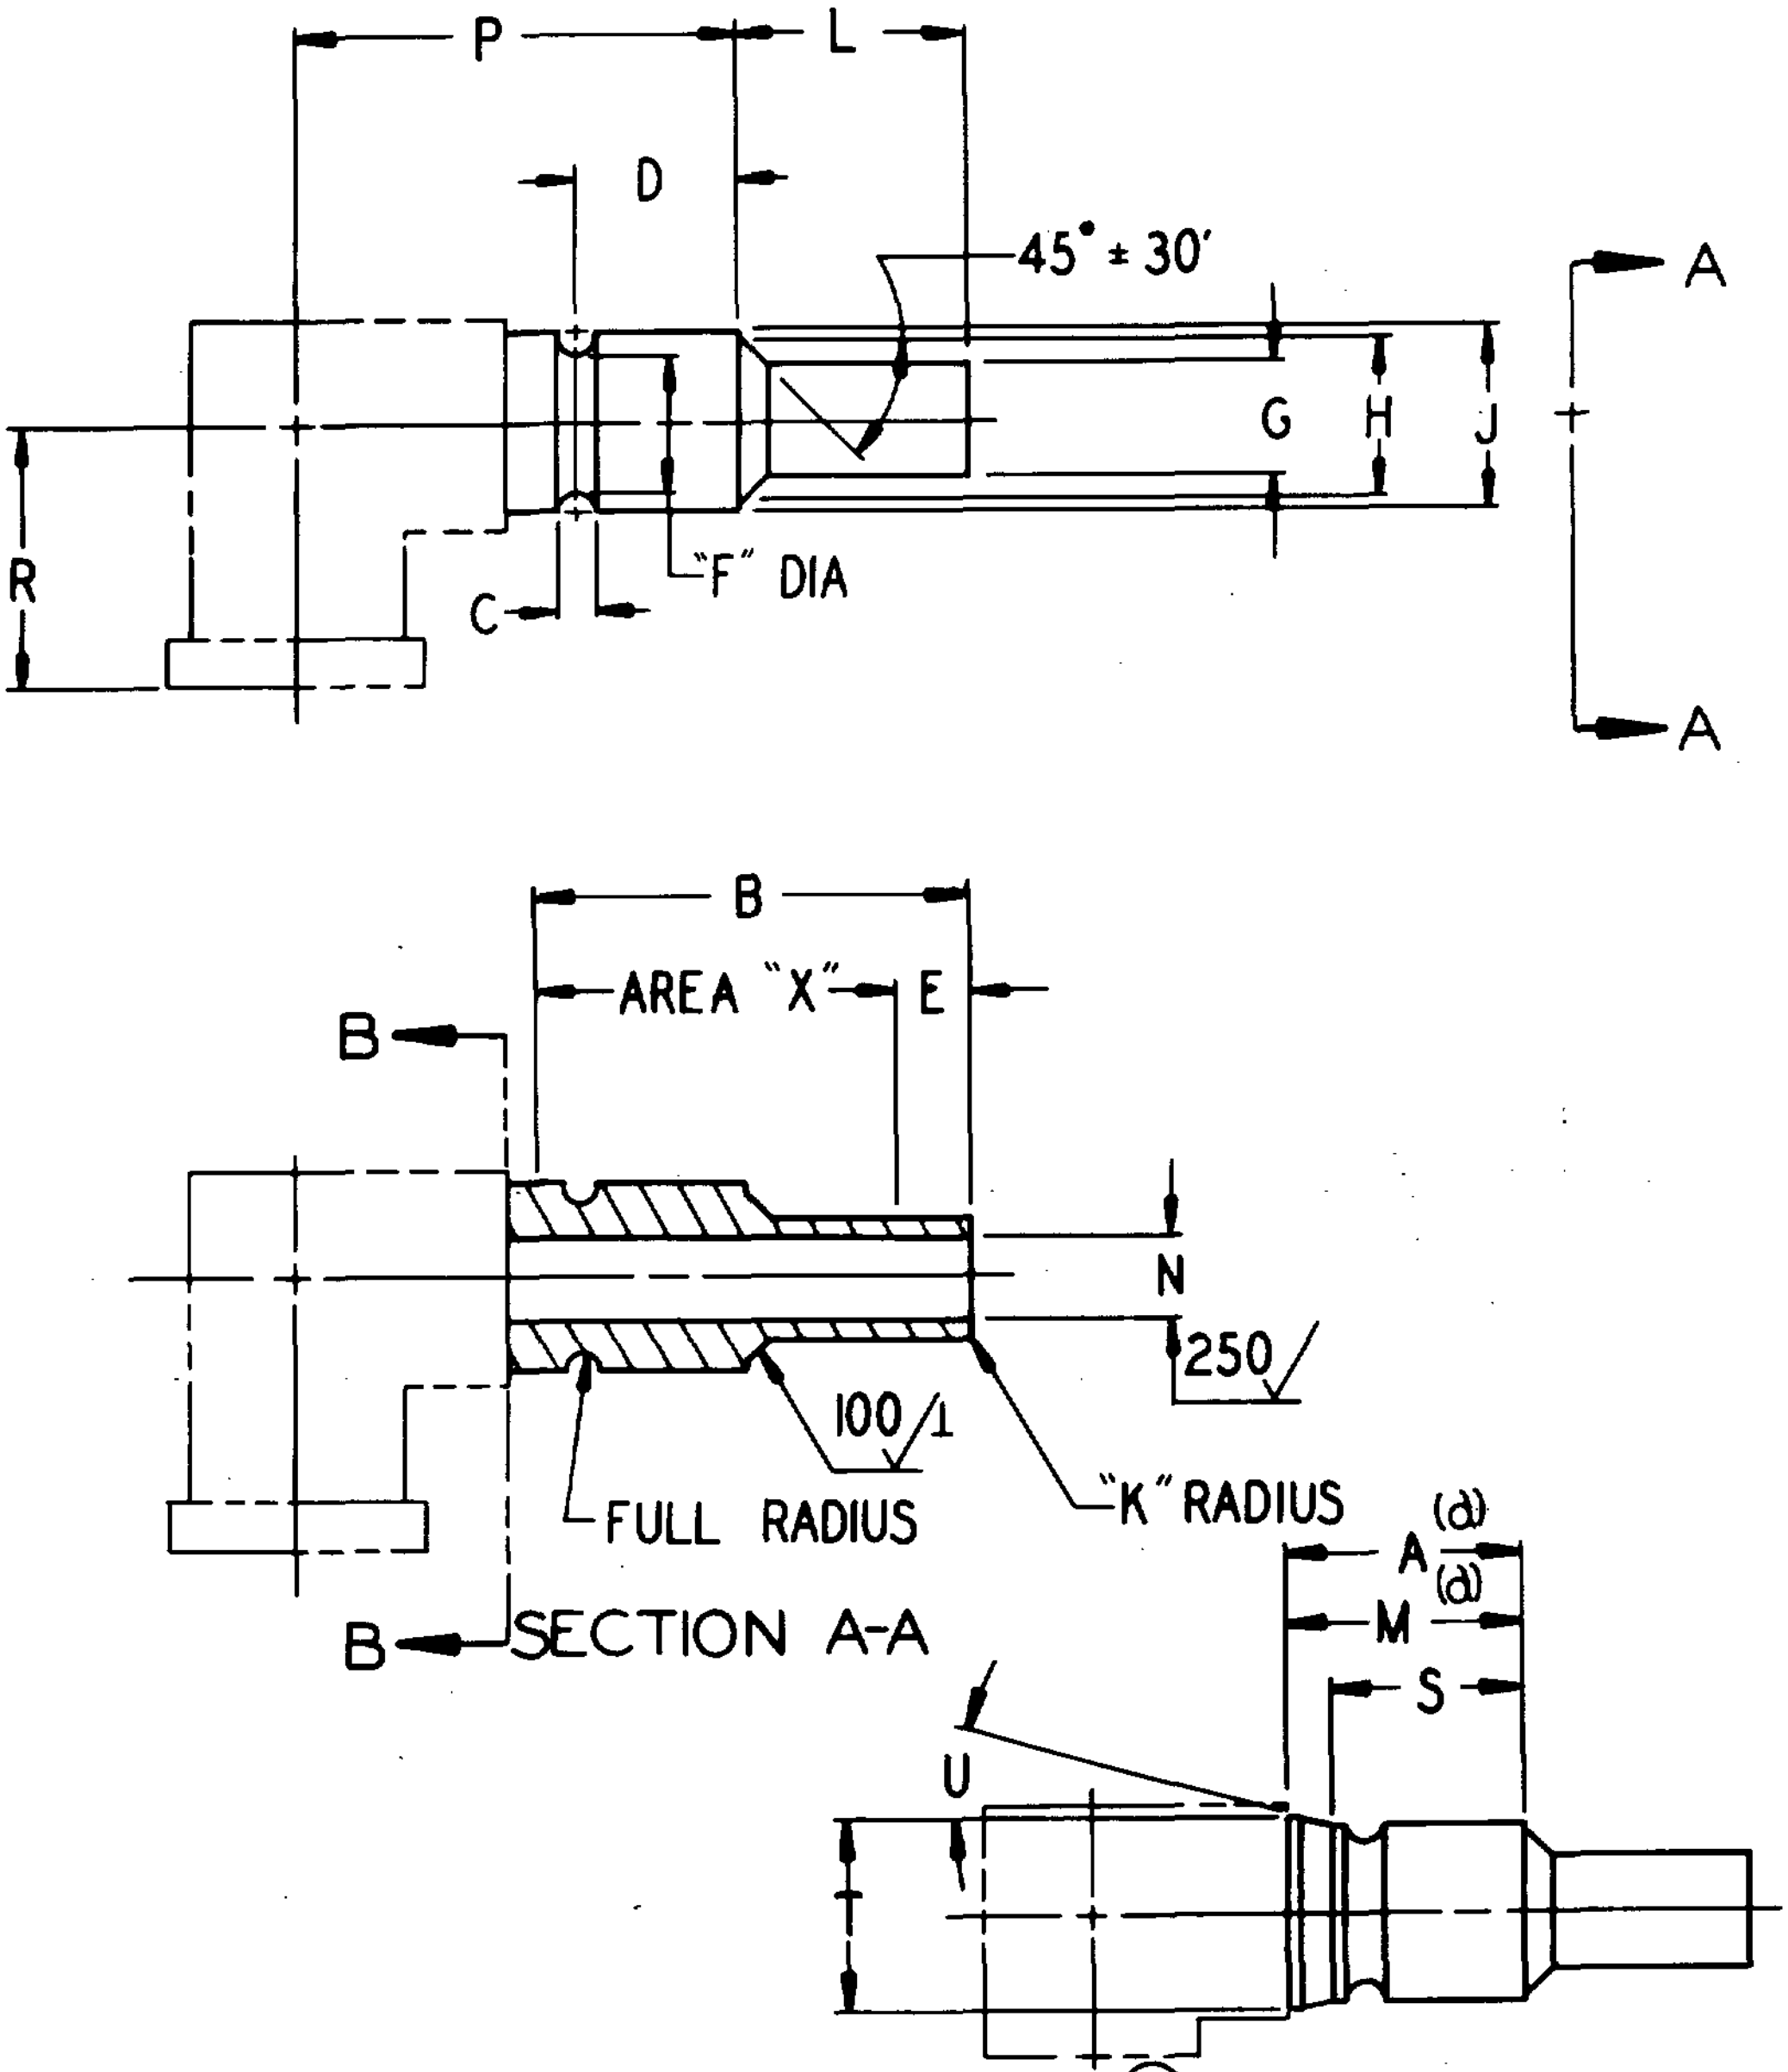

Ⓒ -12 THRU -24 SIZE ONLY

MATERIAL : CORROSION RESISTING STEEL : 321 COLD FIN.
CONDITION "A" SPECIFICATION QQ-S-763.
ALUMINUM ALLOY : 6061-T651 OR T6
SPECIFICATION QQ-A-225/8.

FINISH : CORROSION RESISTING STEEL : PASSIVATE PER MIL-F-27272.
ALUMINUM ALLOY : ANODIZE SPECIFICATION
MIL-A-8625, TYPE II, DYE BLUE.

Ⓒ FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED 1 Sep 61 Revised Ⓐ 2 Jul 63 Ⓑ 2 May 66 Ⓒ 30 Jun 72

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

...y standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A.
Air Force-11 Ⓒ
Other Cust
Army-AV
Navy-AS

TITLE
Ⓒ ELBOW, NIPPLE END, SWIVEL FLANGE TO HOSE-90°

MILITARY STANDARD
MS27082

Procurement Specification
MIL-F-27272

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 67 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

DATE

DRAWN BY

FED SUP CLASS
4730

DRY-FILM LUBRICATE AREA "X" IN ACCORDANCE WITH MIL-L-8937. NO OVERSPRAY ALLOWED.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED ; RADIUS OR BREAK ALL CORNERS .005 + .005 .000. REMOVE ALL BURRS AND SLIVERS. SURFACE Ⓑ ROUGHNESS PER ANSI B46.1 – 1962 NOT TO EXCEED 125 AA . ALL DIAMETERS WITHIN LENGTH "A" PLUS "L" MUST BE CONCENTRIC WITHIN .005 TIR.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD FOR MANUFACTURING PURPOSES. THE ITEM IS ONLY PROCURED AS AN INTEGRAL PART OF ADAPTER ASSEMBLIES.

ANY BENT TUBE DESIGN OF THE ELBOW TO THE LEFT OF PLANE B-B IS ACCEPTABLE PROVIDED DIM'S "P" AND "R", THE MATERIALS SPECIFIED AND THE FABRICATION NOTES OF THIS STANDARD ARE MET.

THE BORE OF THE ELBOW SHALL NOT BE LESS THAN THE I.D. OF THE NIPPLE. OVALITY SHALL NOT EXCEED 7.5 PERCENT OF THE NOMINAL TUBING O.D.

(a) USE "A" DIM. WHEN THE ADJACENT DIA TO THE LEFT OF PLANE B-B IS GREATER THAN "J" DIM. WHEN THE ADJACENT DIA IS EQUAL TO OR LESS THAN "J" DIM. "M" DIM, MAY BE USED IN PLACE OF "A" DIM.

NEXT ASSEMBLY MS27066.

DASH NO.		"A" MIN	B MIN	C		"D" +.005 –.000		E		F	
STEEL	ALUM					STEEL	ALUM				
-8C	-8D	.617	1.030	.098	+.004 –.000	.385	.385	.32	± .12	.497	+.005 –.000
-10C	-10D	.654	1.130			.420	.427	.35	± .15	.586	
-12C	-12D	.755	1.240	.128	+.005 –.000	.500	.500			.674	
-16C	-16D	.831	1.340			545	.545	.39	± .19	1.001	+.008 –.000
-20C	-20D	.881	1.570			.565	.571	.48	± .28	1.255	+.005 –.000
-24C	-24D	1.035	1.720			.665	.665	.50	± .30	1.490	

G +.005 –.000	H ±.005	J +.005 –.000	K		L		"M" MIN	N			P ±.035
								STEEL	ALUM	—	
.426	.530	.616	.020	+.005 –.000	.600	±.015	.583	.345	.345	+.006 –.000	1.135
.526	.625	.706		±.005	.650		.620	.440	.440		1.315
.650	.760	.826	.030		.675	±.025	.720	.560	.560		1.808
.900	1.040	1.150			.730		.796	.828	.828		1.901
1.151	1.275	1.405			.935		.846	1.058	1.058		2.180
1.401	1.550	1.635	.035		.980		1.000	1.253	1.282	+.005 –.000	2.500

R ±.035	S ±.010	"T" MAX	"U" MAX
.892	—	—	—
.896	—	—	—
1.156	.625	.900	15° 30'
1.282	.670	1.190	10° 30'
1.500	.695	1.485	15° 30'
1.688	.795	1.750	

User Activities:
Army-WC, ME, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

This military standard is approved [illegible] the equipment [illegible] defense and is mandatory [illegible] activities [illegible] Selection [illegible] engineering [illegible] does [illegible] of use and for specific [illegible] use shall be made from this document

APPROVED 1 Sep 61 Revised Ⓒ FOR CHANGES SEE SHEETS 1 AND 2.

NOTE: The Government has a royalty free license unde following listed patents for the benefit of Manufacturers of the item ei for the Government or for use in equipment to be red to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055

P.A. Air Force-11 Ⓒ Other Cust. Army-AV Navy-AS	Ⓒ ELBOW, NIPPLE END, SWIVEL FLANGE TO HOSE-90°	MILITARY STANDARD MS27082
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 2 OF 2

DD FORM 1 FEB 61 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

DATE

DRAWN BY