FED. SUP CLASS
6605

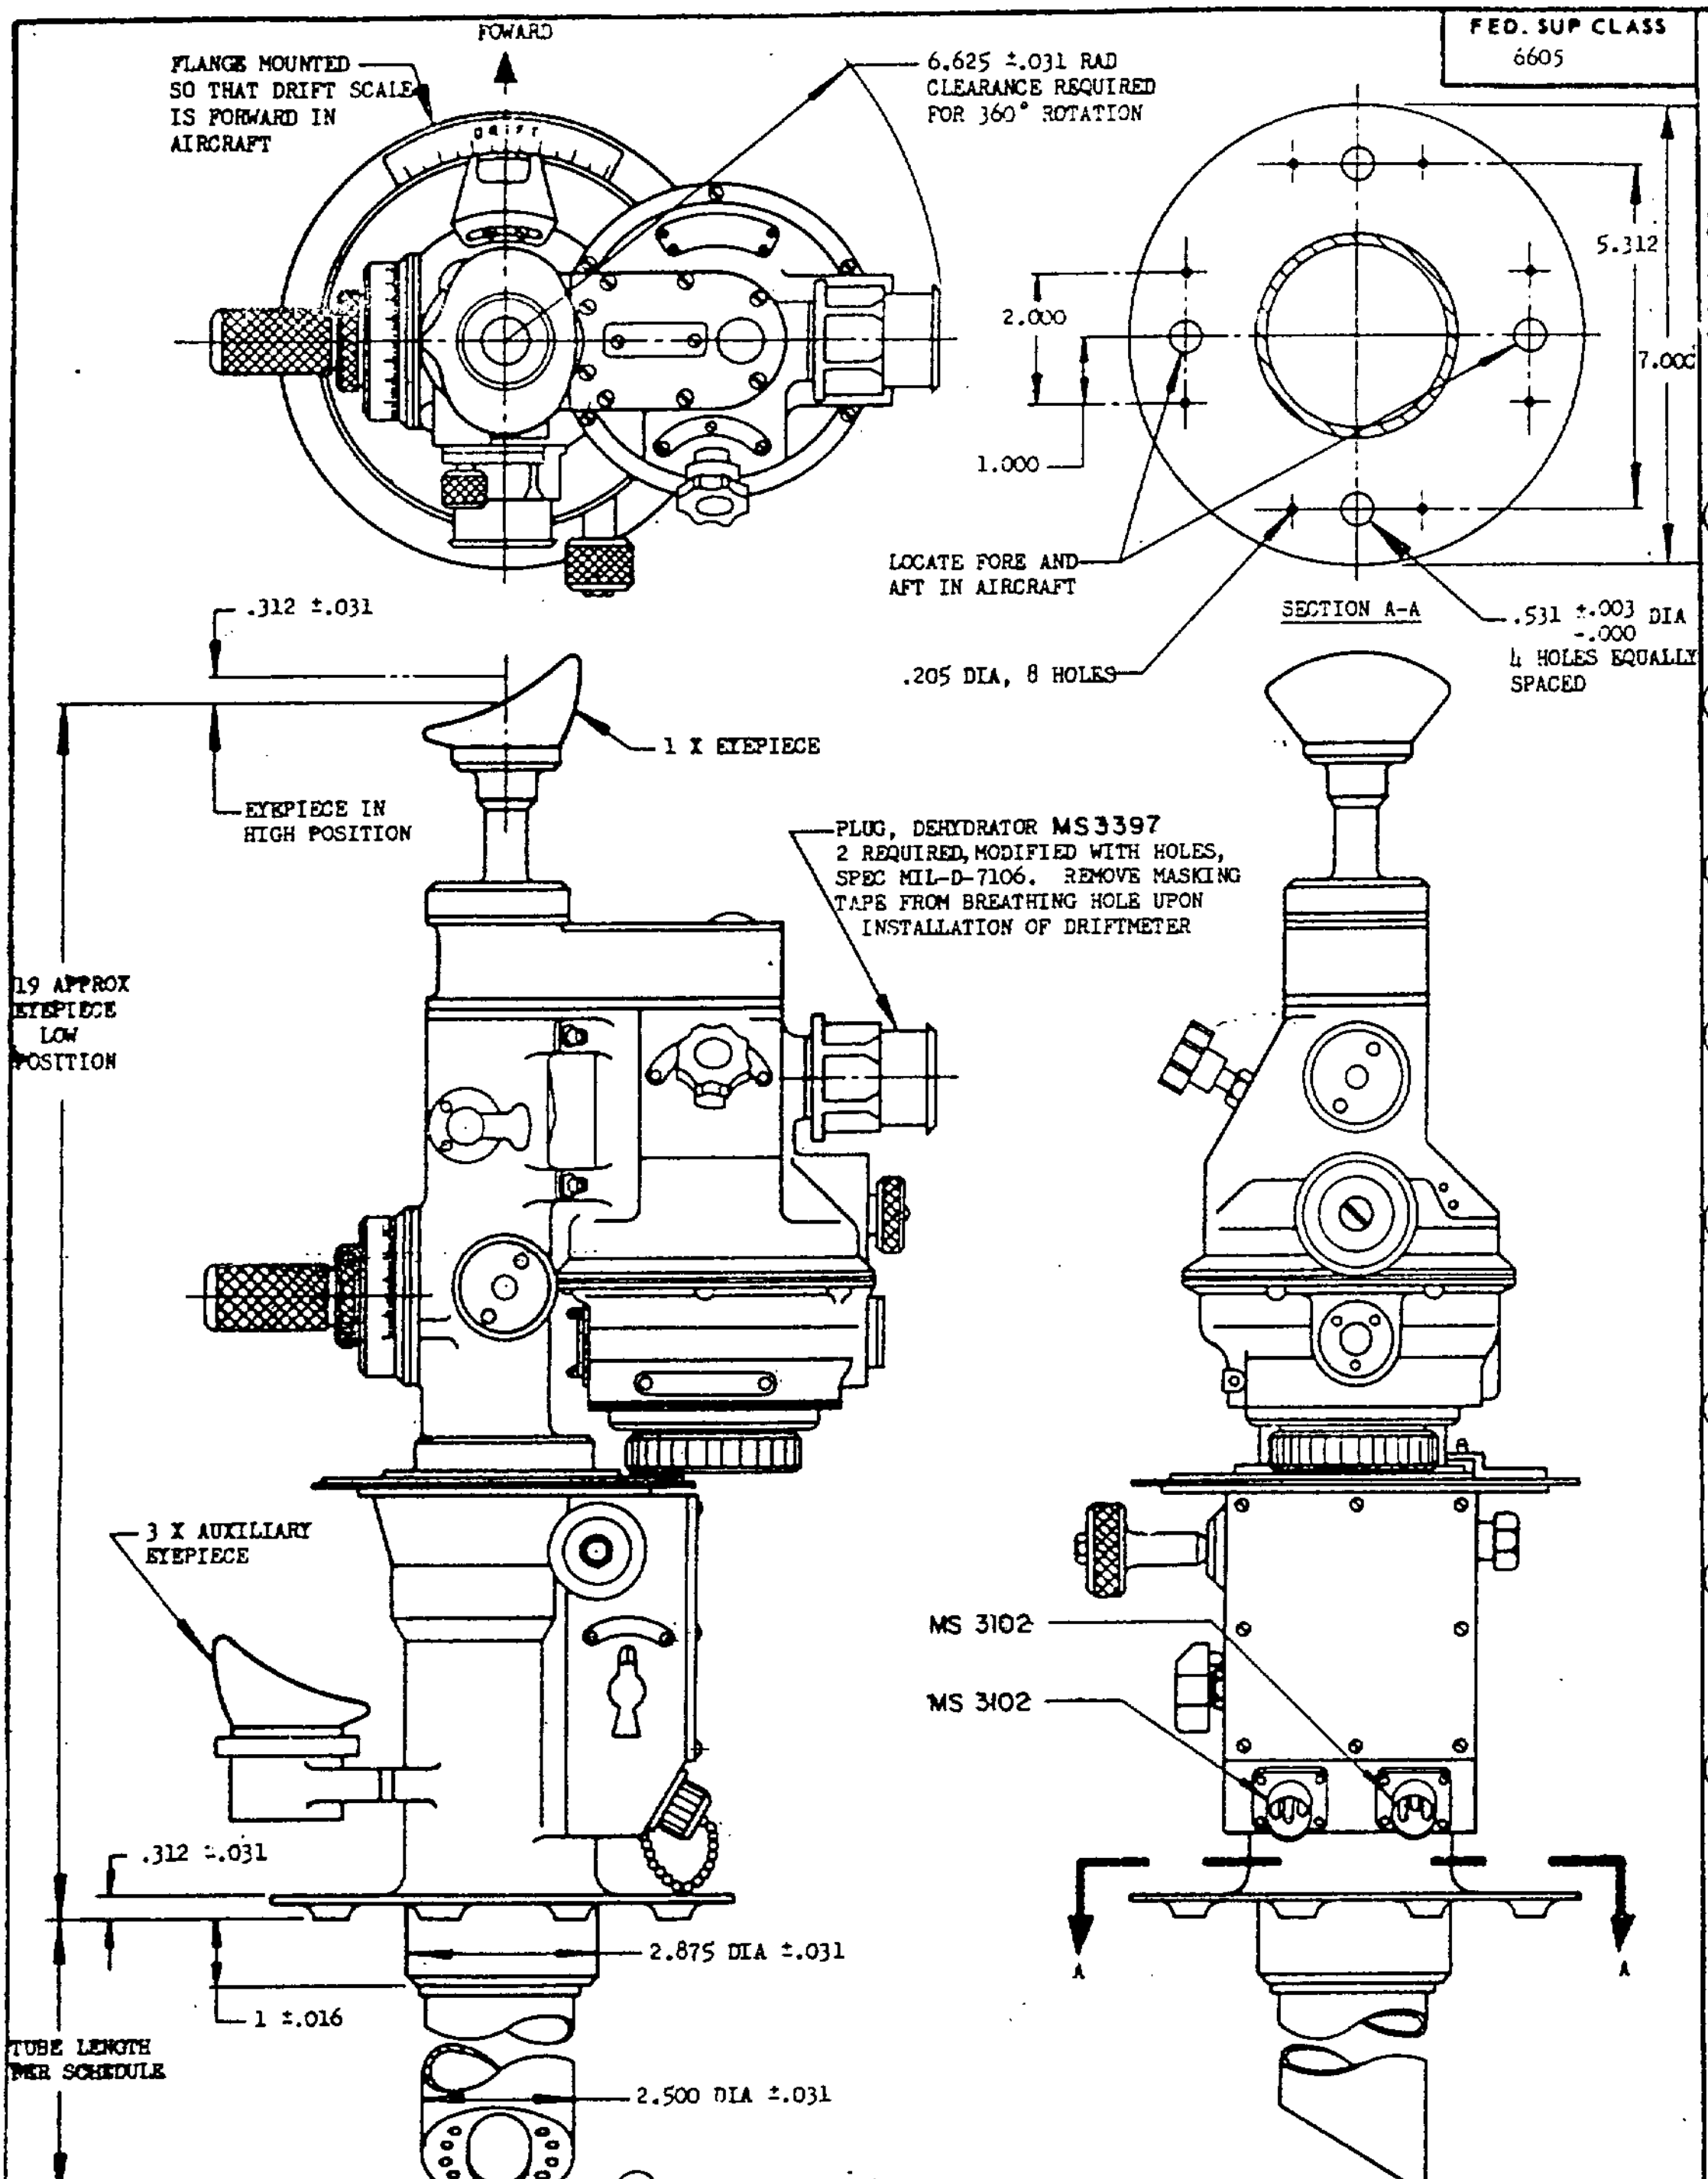
FORWARD
FLANGE MOUNTED SO THAT DRIFT SCALE IS FORWARD IN AIRCRAFT
DRIFT
6.625 ±.031 RAD CLEARANCE REQUIRED FOR 360° ROTATION
5.312
7.000
2.000
1.000
LOCATE FORE AND AFT IN AIRCRAFT
SECTION A-A
.531 +.003 -.000 DIA 4 HOLES EQUALLY SPACED
.205 DIA, 8 HOLES
.312 ±.031
1 X EYEPIECE
EYEPIECE IN HIGH POSITION
PLUG, DEHYDRATOR MS3397 2 REQUIRED, MODIFIED WITH HOLES, SPEC MIL-D-7106. REMOVE MASKING TAPE FROM BREATHING HOLE UPON INSTALLATION OF DRIFTMETER
19 APPROX EYEPIECE LOW POSITION
3 X AUXILIARY EYEPIECE
MS 3102
MS 3102
.312 ±.031
2.875 DIA ±.031
1 ±.016
TUBE LENGTH PER SCHEDULE
2.500 DIA ±.031
A
A

Ⓖ Cancelled ---, No Superseding Document.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

DENOTES CHANGES

APPROVED 26 FEB 51

REVISED Ⓐ 31 JUL 51 Ⓑ 23 OCT 51 Ⓒ 16 DEC 52 Ⓓ 12 MAR 53 Ⓔ 30 NOV 53 Ⓕ 8 JUN 56 Ⓖ 2 Sep 70 Ⓗ 8 MAY 87 15 MAY 1988

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC-N/A

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. Air Force-71 Other Cust Navy-AS Air Force 99	TITLE DRIFTMETER, ELECTRICALLY DRIVEN, GYRO STABILIZED	MILITARY STANDARD MS28012
PROCUREMENT SPECIFICATION MIL-D-7106	SUPERSEDES: AN5763	SHEET 1 OF 2

DD FORM 1 SEP 63 672-1 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED. 6605-0386

		DATE
DRAWN BY		12 FEB 86
TYPED BY		
CHECKED BY		

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO [illegible] ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6605

MS PART NO.	TUBE LENGTH ±.125
MS28012-18	18
MS28012-23	23
MS28012-27	27
MS28012-33	33
MS28012-40	40
MS28012-43	43
MS28012-48	48
MS28012-51	51
MS28012-53	53
MS28012-58	58
MS28012-60	60
MS28012-61	61
MS18012-63	63
MS 28012-68	68
MS28012-73	73
MS28012-78	78
MS28012-83	83
MS28012-93	93
(a) MS28012-100	100
MS28012-103	103
MS28012-108	108
MS28012-111	111
MS28012-113	113
MS28012-120	120
MS28012-128	128
MS28012-147	147
MS28012-153	153

FOR LENGTHS FROM 100 THROUGH 153 INSERT EXTENSION TUBE AN5767-2 IN COMBINATION WITH OTHER LENGTHS.

THE MS 3102 RECEPTACLE SHALL BE SO WIRED THAT THE DRIFTMETER WILL GIVE SPECIFIED PERFORMANCE WHEN THE POWER INPUT OF 200V AC, 380-420 CPS, 3 PHASE, 100 VA, IS CONNECTED TO PINS A, B, AND C WITH THE PHASE SEQUENCE IN THAT ORDER, AND NO CONNECTION TO PIN D.

THE MS 3102 RECEPTACLE SHALL BE SO WIRED THAT THE DRIFTMETER WILL GIVE SPECIFIED PERFORMANCE WHEN A POWER INPUT OF 115 V AC, 380-420 CPS, 3 PHASE, 100 VA, IS CONNECTED TO PINS A, B, AND C WITH THE PHASE SEQUENCE IN THAT ORDER, PIN B SHALL BE GROUND.

THIS PRODUCT IS NOT RESTRICTED TO THE DESIGN SHOWN HEREON, PROVIDED THE DIMENSIONAL AND FUNCTIONAL REQUIREMENTS SPECIFIED ARE MAINTAINED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.

APPROVED 30 NOV 55 REVISED Ⓖ FOR CHANGES SEE SHEET 1 & 2

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
AMSC - NA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AIR FORCE - 71 **Other Cust** NAVY-AS USAF 99	**TITLE** DRIFTMETER, ELECTRICALLY DRIVEN, GYRO STABILIZED		**MILITARY STANDARD** **MS 28012**
PROCUREMENT SPECIFICATION MIL-D-7106	**SUPERSEDES:** AN5763		**SHEET** 2 of 2

DD FORM 1 SEP 63 **672-1** (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

		DATE
DRAWN BY		12 FEB 26
TYPED BY	BONNIE LYNN ARTHUR	2 Jul 70
CHECKED BY		

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

GPO 867-832

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.