FED SUP CLASS
5935


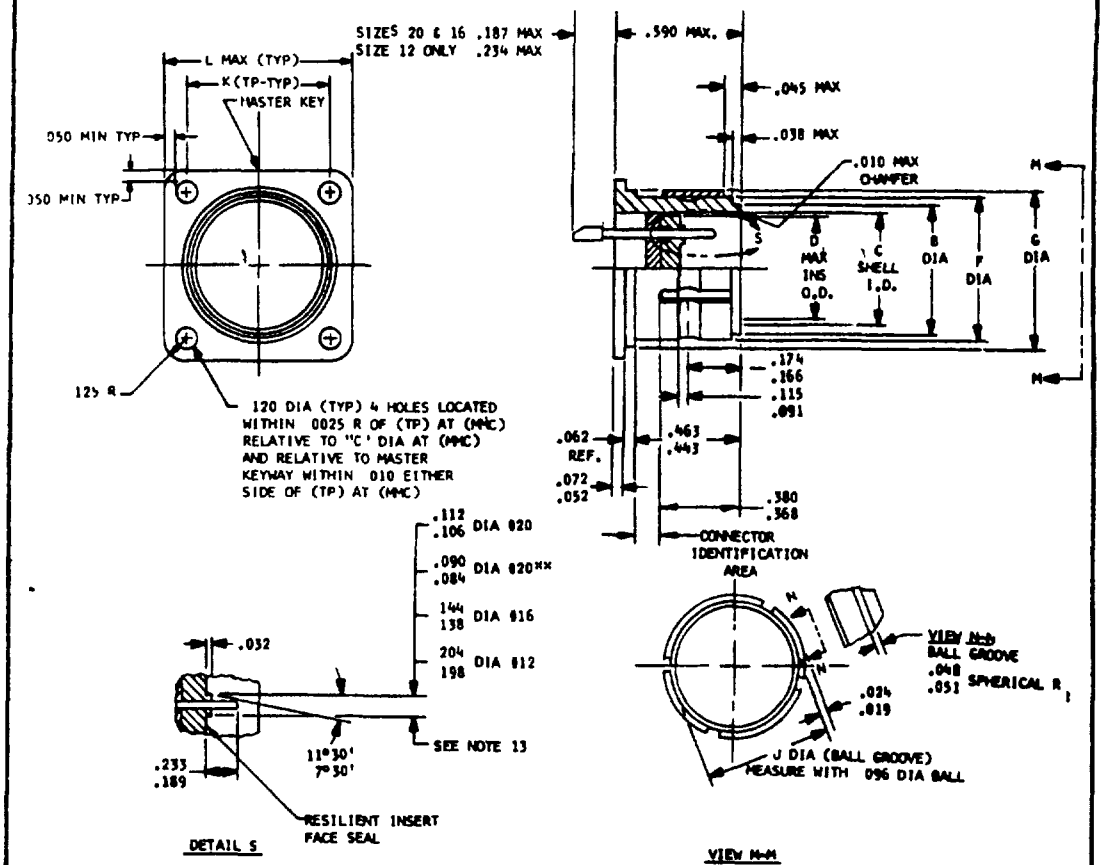


FIGURE 1
CONNECTOR VIEW



PANEL CUTOUT

**ON OUTER ROW CONTACTS OF INSERT ARRANGEMENTS INDICATED IN CHART

PART NUMBER EXAMPLE:

MS3466 H 7 - 50 P B
- B: ALTERNATE INSERT POSITION
- P: CONTACT STYLE (P-PIN)
- 50: INSERT ARRANGEMENT
- 7: SHELL SIZE
- H: CLASS
- MS3466: MS NUMBER

INSERT ARRANGEMENTS REQUIRING REDUCED DIAMETERS FOR PIN CONTACT RAISED SEAL BARRIERS		
SHELL SIZE	INSERT ARRANGEMENTS	CONTACT CAVITIES
12	12 - 50	5, 6, 8, 9, 11 AND 12

APPROVED 21 July 1971 REVISED

P A NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, BOX MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H)	MILITARY STANDARD MS 3466(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 1 OF 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-N668-10

(Limited Coordination)

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:06Z
Check the source to verify that this is the current version before use.


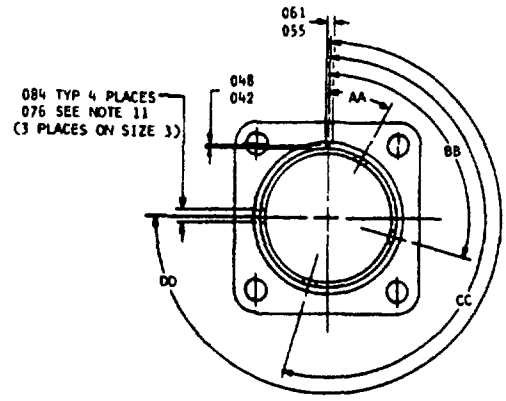


FIGURE II
KEYWAY POSITIONS

TERMINATION END OF CONTACTS

ENGAGING END OF CONTACTS

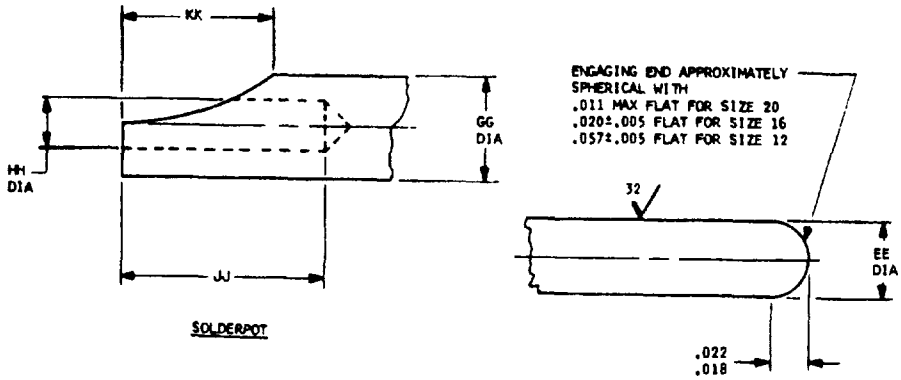

SOLDERPOT

SIZE 20 ENGAGING END
(OPTIONAL)




FIGURE IV
MAX PANEL THICKNESS (TYP)

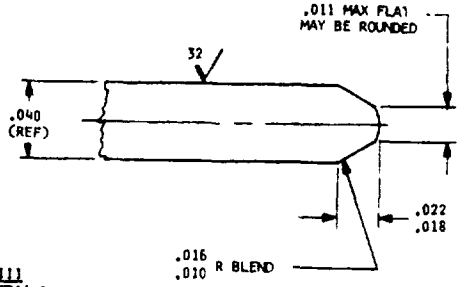


FIGURE III
CONTACT DETAILS

APPROVED 21 July 1971 REVISED

PA NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, BOX MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS '	MILITARY STANDARD MS3466(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 2

DD FORM 10 APR 64 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

This standard is approved by the Department of the Navy and is mandatory for use by the NAVY (and is mandatory for use by all other military activities are required to use) this standard when suitable.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:06Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

TABLE I
CONNECTOR DIMENSIONS AND WEIGHTS

SHELL SIZE	B	C	D	F	G	H	K	L
5	.392 .385	.367 .356	.330	.441 .431	.549 .529	.399 .391	.625	.891
7	.527 .520	.483 .473	.451	.576 .566	.682 .662	.534 .526	.719	1.016
13	.661 .654	.624 .614	.553	.710 .700	.822 .802	.669 .661	.813	1.109
19	.800 .793	.763 .753	.738	.849 .839	.947 .927	.807 .799	.906	1.203
27	.935 .928	.918 .888	.834	1.004 .994	1.150 1.110	.962 .954	.968	1.297
37	1.077 1.070	1.048 1.038	.978	1.186 1.116	1.228 1.208	1.084 1.076	1.187	1.453
61	1.365 1.358	1.316 1.306	1.271	1.414 1.404	1.510 1.490	1.367 1.360	1.436	1.797

SHELL SIZE	M	WEIGHT (LBS) SEE NOTE 7 PIN INSERT
5	.583	(WEIGHT WILL BE
7	.760	SUPPLIED IN LATER
13	.885	REVISION)
19	1.010	
27	1.141	
37	1.271	
61	1.583	

TABLE II
KEYWAY POSITIONS

SIZE	AA	BB	CC	DD
5	23°	97°	187°	—
7	23°	97°	187°	277°
13	30°	105°	195°	270°
19	30°	105°	195°	270°
27	30°	105°	195°	270°
37	30°	105°	195°	270°
61	30°	105°	195°	270°

TABLE III
CONTACT DIMENSIONS

CONT SIZE	FF	GG	HH	JJ	KK
20	.041 .039	.088 .061	.058 .052	.188 .109	.110 .068
16	.0635 .0615	.116 .096	.078 .072	.251 .172	.141 .109
12	.095 .093	.150 .130	.122 .110	.251 .172	.143 .109

NOTES (NOTES 1 THRU 6 APPLICABLE TO CONTACTS ONLY).

1 CONTACT FINISH GOLD PLATE .000050 INCH MIN IN ACCORDANCE WITH MIL-G-45204 A SUITABLE UNDERPLATING MAY BE USED SILVER UNDERPLATING SHALL NOT BE USED FINISH IS APPLIED AFTER SEALING
2. DIMENSIONS IN INCHES, DIMENSIONS APPLY AFTER PLATING
3 63 ALL OVER PER ASA-B46.1-1962 UNLESS OTHERWISE SPECIFIED
4 REMOVE ALL BURRS AND SHARP EDGES .003 TO 005 R
5 DIAMETERS TO BE CONCENTRIC WITHIN 004 TIR
6 DIAMETERS IN THE SAME CROSS-SECTIONAL PLANE TO BE CONCENTRIC WITH EACH OTHER WITHIN 003 TIR
7 WEIGHT LISTED IS CONNECTOR MAXIMUM WEIGHT PER SHELL SIZE
8 SHELL MATERIAL COLD ROLLED STEEL, PER QQ-S-637
9 SHELL FINISH 0001 MIN TIN PER MIL-T-10727, OVER NICKEL PER QQ-N-290
10 EACH CONNECTOR SHALL BE PACKAGED WITH A PLASTIC DUST CAP OVER EACH END OF SHELL
11 FOUR KEYWAYS (MMC) AND INSERT SHALL BE LOCATED WITHIN .004 EITHER SIDE OF (TP) RELATIVE TO MASTER KEYWAY (MMC) AND SHELL O D (MMC)
12 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE XX ± 010 AND XXX ± 005, ANGULAR TOLERANCE, X° ±1°-0' AND X°X' ± 30'
13 DIAMETERS SHOWN ARE AT BASE OF BARRIERS.

APPROVED 21 July 1971 REVISED

P A NAVY-AS Other Cust	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, BOX MOUNTING, PUSH-PULL COUPLING SERIES 3 (CLASS H)	MILITARY STANDARD MS 3466(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 3

DD FORM 1 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

☆ U S GOVERNMENT PRINTING OFFICE 1971 714-157/832

This standard has been approved by the Department of the NAVY and is mandatory for use by it by All other military activities are required employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:06Z
Check the source to verify that this is the current version before use.