


PROJ NO. 5120—N696

FED. SUP CLASS
5120

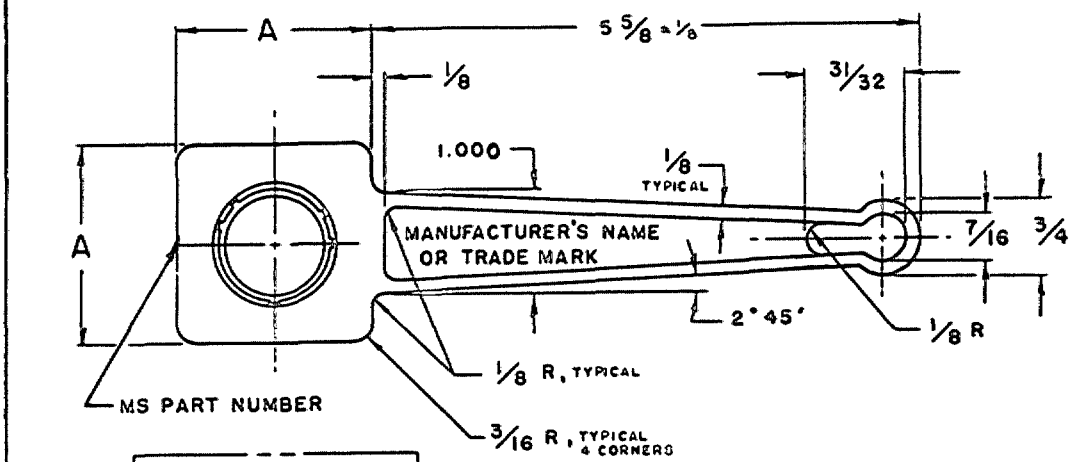


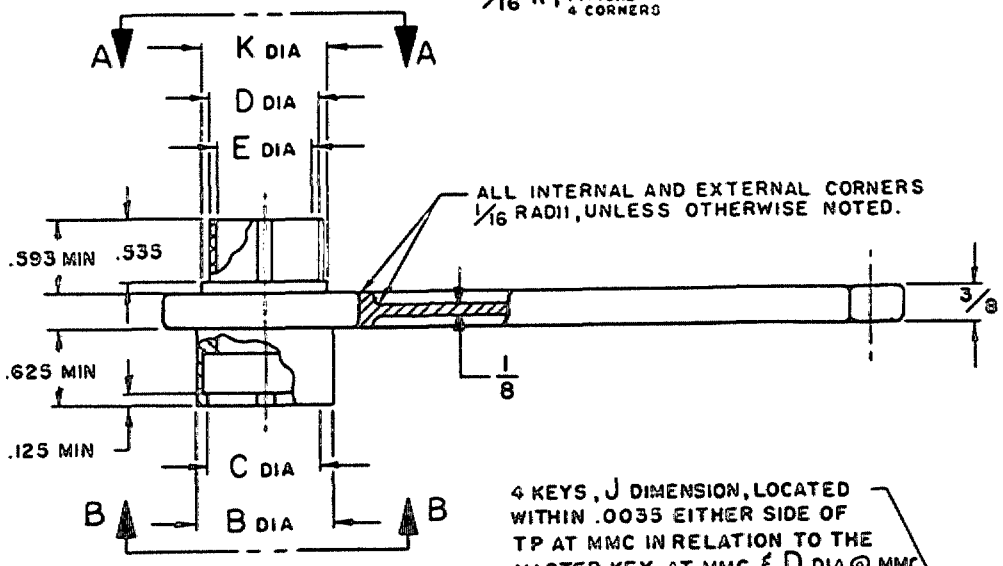

4 KEYS, J DIMENSION, LOCATED WITHIN .0035 EITHER SIDE OF TP AT MMC IN RELATION TO THE MASTER KEY AT MMC & D DIA @ MMC

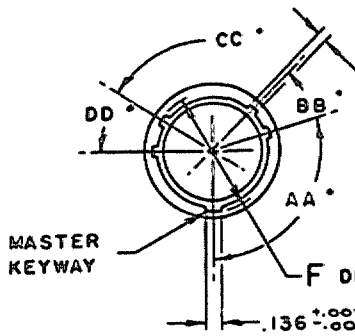

4 KEYS, H DIM, LOC WITHIN .0035 EITHER SIDE OF TP AT MMC IN RELATION TO THE MASTER KEY AT MMC & C DIA @ MMC

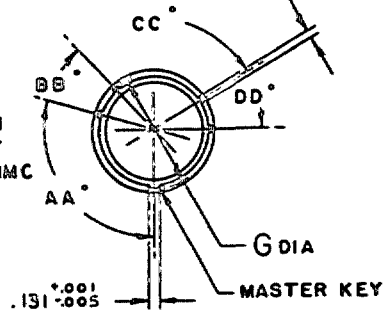

VIEW: B-B

VIEW: A-A

APPROVED 21 Jan 1970 REVISED

P.A. NAVY—AS Other Cust	TITLE TOOL, CONNECTOR ASSEMBLY; FOR MIL-C-81511 CONNECTORS	MILITARY STANDARD MS 3482 (NAVY)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved by the Department of the Navy and is mandatory for use by that Department. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of the Navy and is mandatory for use by that Department. All other military activities are required to employ this standard where suitable.

DASH NUMBER	CONNECTOR SHELL SIZE	A ±.060	B DIA ±.003	C DIA ±.003	D DIA +.001 −.008	E DIA APPROX	F DIA MIN	G DIA MAX	H +.006 −.001	J +.001 −.006	K DIA APPROX
−08	8	1.250	.550	.389	.381	.319	.450	.440	.071	.056	.550
−10	10		.675	.514	.506	.444	.575	.565			.675
−14	14	2.000	.925	.764	.756	.694	.825	.815			.925
−16	16		1.051	.890	.882	.820	.951	.941	.084	.069	1.051
−18	18		1.175	1.014	1.006	.944	1.075	1.065			1.175

SHELL SIZE 8	
POLARIZATION POSITION	AA°
1	128°
2	190°
3	205°
4	220°
5	235°
6	250°

SHELL SIZE 10 AND 14				
POLARIZATION POSITION	AA°	BB°	CC°	DD°
1	105°	140°	215°	265°
2	102°	132°	248°	320°
3	80°	118°	230°	312°
4	35°	140°	205°	275°
5	64°	155°	235°	304°
6	35°	115°	220°	270°

SHELL SIZE 16 AND 18				
POLARIZATION POSITION	AA°	BB°	CC°	DD°
1	105°	140°	215°	265°
2	18°	149°	192°	259°
3	92°	152°	222°	342°
4	84°	152°	204°	334°
5	24°	135°	199°	240°
6	98°	152°	268°	338°

REQUIREMENTS:

1. TOOLS ARE FOR USE WITH CONNECTORS CONFORMING TO MIL-C-81511.
2. PART NUMBER SHALL INCLUDE: MS PART NUMBER AND DASH NUMBER(S) SHOWN IN THE EXAMPLE BELOW,

MS3482−18−6
MS NUMBER — DASH NUMBER — POLARIZATION POSITION

NOTES:

1. MATERIAL: a. SHELL; ALUMINUM ALLOY PER QQ-A-225/6, /8 OR /10.
   b. HANDLE; DIE CAST ALUMINUM ALLOY PER QQ-A-591.
2. FINISH: NICKEL PLATE PER QQ-N-290.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. ALL DIMESIONS ARE INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm\frac{1}{16}$, ANGLES: TP
   DECIMALS ±.016

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 21 Jan. 1970 REVISED

PROCUREMENT SPECIFICATION: NONE

SUPERSEDES: MIL-C-81511 CONNECTORS

TITLE: TOOL, CONNECTOR ASSEMBLY; FOR

P.A. NAVY - AS Other Cost

MILITARY STANDARD

MS3482(NAVY)

SHEET 2

DD, FORM 1 SEP 65 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709

PROJ No. 5120-N-698

FED. SUP CLASS 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.