INCH-POUND

MS35118E
w/AMENDMENT 1
22 June 2023
SUPERSEDING
MS35118E
01 August 2013


DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, SERIES SM, UG-695/U

Inactive for new design after 15 June 1999

This specification is approved for use by all Departments
and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall
consist of this specification sheet and MIL-DTL-27434.

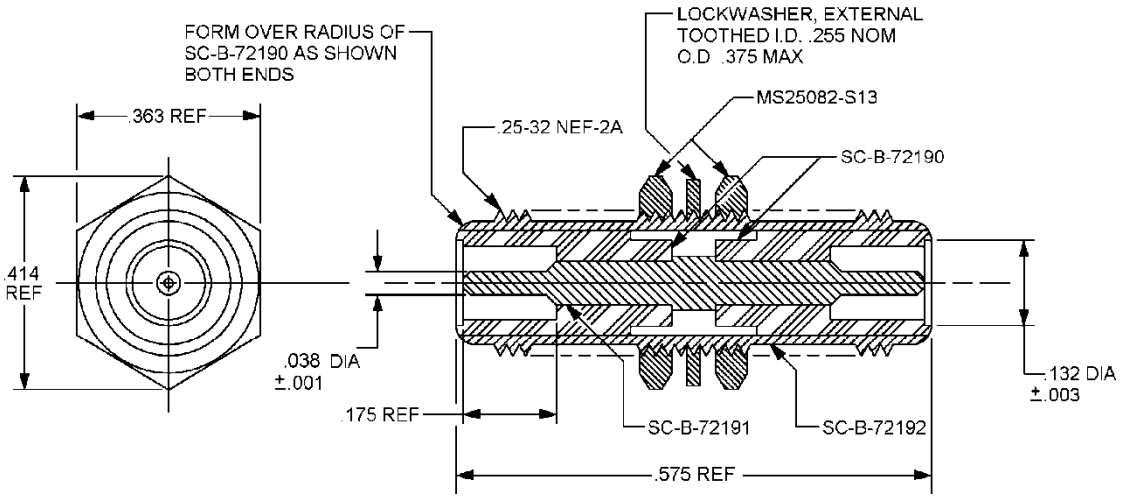

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified tolerances shall be ± .003 Inch (0.08 mm).

FIGURE 1. Connector, receptacle, series SM, UG-695/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.

Engineering Information:

Frequency range: DC to 500 MHz.

Voltage rating: 100 volts peak.

Applicable drawings

Quantity	Description	Material	Drawing or MS
2	Insulator	Plastic	SC-B-72190
1	Contact	Brass	SC-B-72191
1	Body	Brass	SC-B-72192
1	Lock washer	Ph. Bronze	
2	Nut, Hex	Brass	MS25082-S13

Requirements:

Dimensions and configuration shall be specified on figure 1.

The insulator shall have no visible cracks or flaws.

All metal parts shall be free from chips, burrs and scratches in accordance with best commercial practices.

All metal parts (except the center contact) shall have a silver plate in accordance with ASTM B700 a minimum thickness of 0.000200 inches, (5.08 µm).

Center contacts shall be gold plated to a minimum of 50µ inches in accordance with MIL-DTL-45204, type II, grade C, class1.

Corrosion: In accordance with test procedure EIA/ECA 364-26, test condition B.

All threads shall be in accordance with FED-STD-H28.

Part or Identifying Number (PIN): MS35118-1.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-27434, this document references the following:

MIL-DTL-45204
SC-B-72190
SC-B-72191
SC-B-72192
ASTM B700
EIA/ECA 364-26
FED-STD-H28

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2023-057)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.