
FED. SUP CLASS
6640

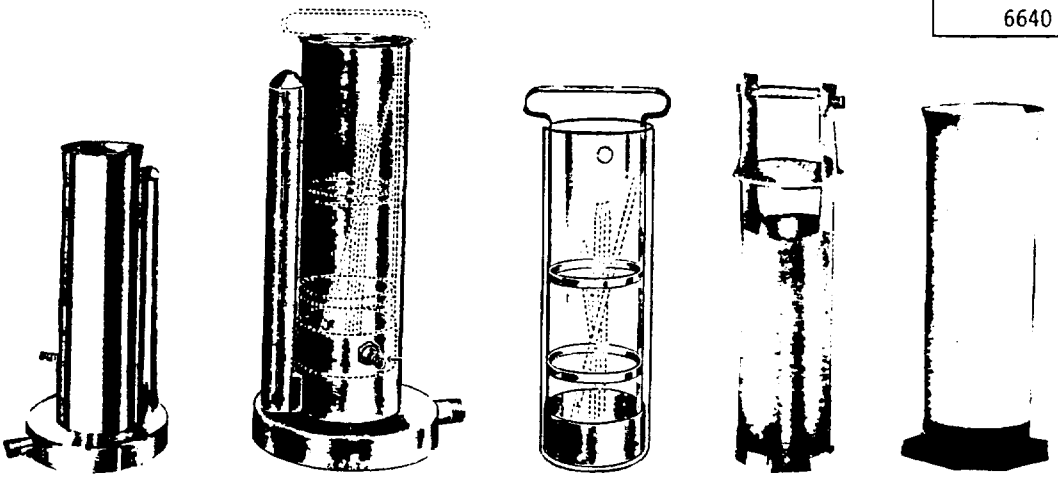

MS36592-1 MS36592-2 MS36592-3 MS36592-4 MS36592-5

PART NUMBER	NOMENCLATURE
MS36592-1	Washer, Pipet, Automatic
MS36592-2	Washer, Pipet, Automatic
ACCESSORIES	
MS36592-3	Rack, Pipet, Washer
MS36592-4	Basket, Pipet
MS36592-5	Jar, Pipet
MS36592-6	Jar, Pipet

MATERIAL: MS36592-1 and -3 shall be of corrosion-resisting steel in accordance with Federal Specification QQ-S-766, Class 302 or 304; except that material for screen will be Class 316.

MS36592-2, -4, and -5 shall be of conventional polyethylene in accordance with Federal Specification L-P-390, Type I, Class 1, Grade 2.

MS36592-6 shall be high density linear polyethylene.

DESIGN: MS36592-1 washer shall have nominal inside dimensions of 52 cm high by 15.2 cm diameter, and overall dimensions of 56.5 cm high by 26.3 cm diameter. It shall be of a single, nominal 0.457 mm thick wall construction, lock seamed and soldered to a nominal 0.635 mm thick base. Top of cylinder shall be open, with a rolled edge, reinforced with 3.175 mm diameter wire. Bottom edges shall be turned smooth and soldered water tight. Washer shall have a 13 mm IPS female inlet, securely soldered and supplied with a removable serrated hose nipple; and a base having a 25.4 mm IPS male outlet tube securely fastened.

MS36592-2 washer shall have nominal overall dimensions of 50.8 cm high by 16.5 cm diameter. It shall be cylindrical, essentially identical to MS36592-1 in design. It shall have a rigidly molded 15.8 mm outside diameter serrated inlet tube and a 25.4 mm NPT drain.

MS36592-3 rack shall be cylindrically formed with a nominal diameter of 13.9 mm by 49.2 cm high. It shall contain three 13.3 cm diameter bands, with the bottom of the rack constructed on a No. 10 mesh 0.813 mm steel wire. It shall be flanged downward to fit over an inner ring and tightly pressed into the bottom ring so as not to entrap acid or pull loose. Handle shall be shaped to fit on the rim of a pipet jar.

(A) ENTIRE STANDARD REVISED

P.A.	EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MS 99		WASHER, PIPET, AUTOMATIC	MS36592
Procurement Specifications: See NOTES 4,5, & 6		SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-0779

APPROVED 15 April 1970 REVISED (A) 8 NOV 1983

USER ACTIVITIES: ARMY - DM, MD, MI
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23 17:44Z
Check the source to verify that this is the current version before use.

MS36592-4 basket shall be cylindrical with a perforated bottom and a handle composed of two vertical straps to the cross bar of polyethylene covered metal. It shall have a nominal diameter of 11.4 cm and a height of 53.3 cm. The perforated bottom plate is recessed 1.9 cm and the sides are cut out below it to facilitate flow of liquids into and out of the holder.

MS36592-5 shall be cylindrical with a nominal 24.3 cm outside diameter flanged base. It shall have a nominal overall height of 45.7 cm and an outside diameter of 16.5 cm. The rim at the open end shall have a smooth, even finish and shall be in a plane at right angles to the sides. It shall not rock when placed on a smooth plane surface.

MS36592-6 is similar to MS36592-5 but is constructed with a removable base.

NOTES:

1. Washers shall be supplied without a pipet rack or jar.
2. Washers accommodate pipets or tubes up to 375 mm in length.
3. A complete siphon cycle shall last from 60 to 70 seconds.
4. Procurement document for MS36592-4 is Military Specification MIL-B-36470.
5. Procurement document for MS36592-5 is Military Specification MIL-J-36511, Style A.
6. Procurement document for MS36592-6 is Military Specification MIL-J-36511, Style B.
7. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.
10. FSCM: 05178, 22527, and 59728.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

APPROVED REVISED A 8 [illegible]

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		WASHER, PIPET, AUTOMATIC	MS36592
Procurement Specifications See NOTES 4,5, & 6	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-0779

Source: https://assist.dla.mil -- Downloaded: 2026-10-23117:442
Check the source to verify that this is the current version before use.