
FED. SUP CLASS
2320

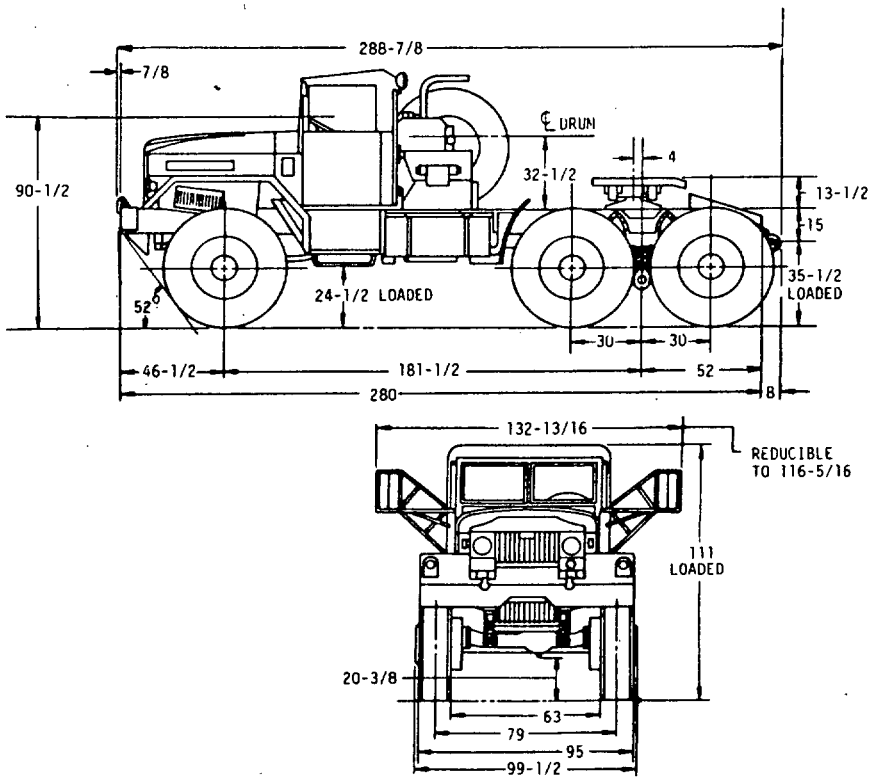

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 9 NOVEMBER 1966 REVISED Ⓑ 13 MAR 85

Ⓑ ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS 500070-1	8736634

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK TRACTOR: 10 TON, 6 X 6, 181.5 INCH WHEELBASE, M123A1C
PROCUREMENT SPECIFICATION MIL-T-62012	SUPERSEDES:	SHEET 1 OF 2

MILITARY STANDARD
MS500070(AT)

DD FORM 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

USER ACTIVITIES: --- REVIEWER ACTIVITIES

FED. SUP CLASS 2320

VEHICLE CHARACTERISTICS

WEIGHTS	EMPTY	LOADED
LESS CREW:		
PAYLOAD	-	30000
FRONT AXLE	12650	13754
INTER AXLE	8790	23243
REAR AXLE	8790	23243
TOTAL-LBS.	30230	60230

TOWED LOAD: MAXIMUM, INCL PAYLOAD LOADED 80000 LBS
(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY)

MINIMUM TURNING RADIUS: 18 FT.

FORDING DEPTH: WITH KIT 78 IN.
WITHOUT KIT 30 IN.

POWER PLANT:	10946157
ENGINE DIESEL V8-300 COMPLETE	10946195
ENGINE DIESEL V8-300 BASIC	10946107
DISPLACEMENT: 785 CUBIC IN.	BORE 5-1/2
STROKE	4-1/8
COMPRESSION RATIO	16.9 TO 1
GOVERNED SPEED	3000 RPM
MAXIMUM GROSS HP	300 @ 3000 RPM
MAXIMUM GROSS TORQUE	580 FT. LBS. @ 2100 RPM
COOLING SYSTEM:	10946133
CAPACITY	49 QTS.
RADIATOR AND SHROUD ASSY	10946106
FUEL SYSTEM:	10946175
EXHAUST SYSTEM:	10946072
CLUTCH ASSY:	10945906
CLUTCH PEDAL	8760431
PRESSURE PLATE	8332176
DISC COMPLETE, TWO	8332177
TRANSMISSION:	8332883-1
FORWARD SPEEDS, TEN REVERSE, TWO	
RATIOS: HIGH 7.53 4.32 2.60 1.62 1.00	
LOW 18.83 10.80 6.50 4.05 2.50	
REVERSE RATIOS, HIGH 7.53 LOW 18.83	
TRANSFER: INTEGRAL WITH TRANSMISSION	
FRONT SUSPENSION:	8760443-1
FRONT AXLE	7998622-1
FRONT SPRINGS, TWO	8332831
SHOCK ABSORBER, R.H.	8332827
SHOCK ABSORBER, L.H.	8332828
REAR SUSPENSION: BOGIE	8760450-2
AXLE REAR, FRONT	10945921-3
AXLE REAR, REAR	10945921-2
SPACER-REAR SPRING U BOLT, TWO	8332843
REAR SPRINGS, TWO	8332839
TORQUE ROD ASSY-FRONT	8329534
TORQUE ROD ASSY-REAR	7327455
FRAME ASSY:	10946062
SIDE RAIL 10-5/8 X 3-1/4 X 5/16	
SECTION MODULUS 15.0 IN^3	
REAR CROSS MEMBER	8760190
TIE DOWNS, TEN	7373215
LOCATION-5 EACH SIDE	

WHEELS RING:	MS53044-9
SIZE 24 X 10 OFFSET 8-7/8	
RING	MS53045-5
TIRES: TEN PLUS ONE SPARE	MS35388-27
SIZE 14.00 X 24; 20 PLY, TREAD, NDMS	
TUBES:	MS35392-20
CAB: SOFT TOP	10864639-4
CAB ASSY COMPLETE	10946114
SPARE TIRE MOUNT	8760269
HOOD, GRILL AND FENDER	10946159
STEERING GEAR & LINKAGE	10946188
BATTERY BOX-RUNNING BOARD	10864938-2
BATTERY BOX, SECOND	10946225
RUNNING BOARD L.H.	11659837-1
REAR FENDER	10864633
STEP, FRONT	11641221
AIR CLEANER	10946156
INSTRUMENT PANEL	10946177
TACHOMETER CABLE	10946136
SPEEDOMETER CABLE	10864653
ACCELERATOR	10946119
PROPELLER SHAFT	10945917
HAND BRAKE	10864644
FIFTH WHEEL ASSY:	MS53034-1
FIFTH WHEEL	8760287
FOR 3-1/2 INCH KING PINS ONLY.	
FRONT BUMPER:	10864638-2
WINCH:	10864662
WINCH, CAPACITY 45000 LBS.	10864727
PINTLE:	8760245
PINTLE HOOK	MS51117-1
AIR BRAKE SYSTEM:	10946193
GOVERNOR	MS53006-1
PEDAL AND BRACKET ASSY	10875600
AIR RESERVOIR, TWO	7534286
VALVE, HAND CONTROL	8331393
ELECTRICAL WIRING:	10946113
LIGHT MARKER, R & L, TWO	MS53047-1
HEADLIGHT, TWO	8741462
HEADLIGHT, BLACKOUT L.H.	MS51318-1
SLAVE RECEPTACLE	7731421
MARKER LAMP, BLACKOUT, TWO	MS51303
REAR LIGHTING	10945908
POTENTIAL, 24 VOLT	
WIRING DIAGRAM	10946158
TAILLIGHT, TWO	MS51329-1
LAMP ASSY BLACKOUT, STOP	MS51302-1
GENERATOR, ALTERNATOR	10929868
BATTERIES, 12 VOLT, 6TN, FOUR	MS35000-4

PERFORMANCE:

FUEL TANK, CAPACITY	166 GALLONS
CRUISING RANGE, HIGHWAY	350 MILES
MAXIMUM SPEED, HIGHWAY	44 MPH

ADDITIONAL EQUIPMENT AVAILABLE:

ARCTIC HEATER KIT, COMPLETE	11600101
HEATER KIT, PERSONNEL TEMP.	11592317-2
FORDING KIT	11600102
WARNING LIGHT KIT	11649248

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH. 48090.
4. SUBJECT OF NATO STANAG 2805-A (EDITION 3); DO NOT REVISE OR CHANGE.

APPROVED 9 NOVEMBER 1966 REVISED (8) 13 MAR 85

(8) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS 500070-1	8736634

P. A. ARMY-AT / Other Cust	INTERNATIONAL INTEREST	TITLE
		TRUCK TRACTOR: 10 TON, 6 X 6, 181.5 INCH WHEELBASE, M123A1C

MILITARY STANDARD
MS500070(AT)

PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET
MIL-T-62012		2 OF 2

DD FORM 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.