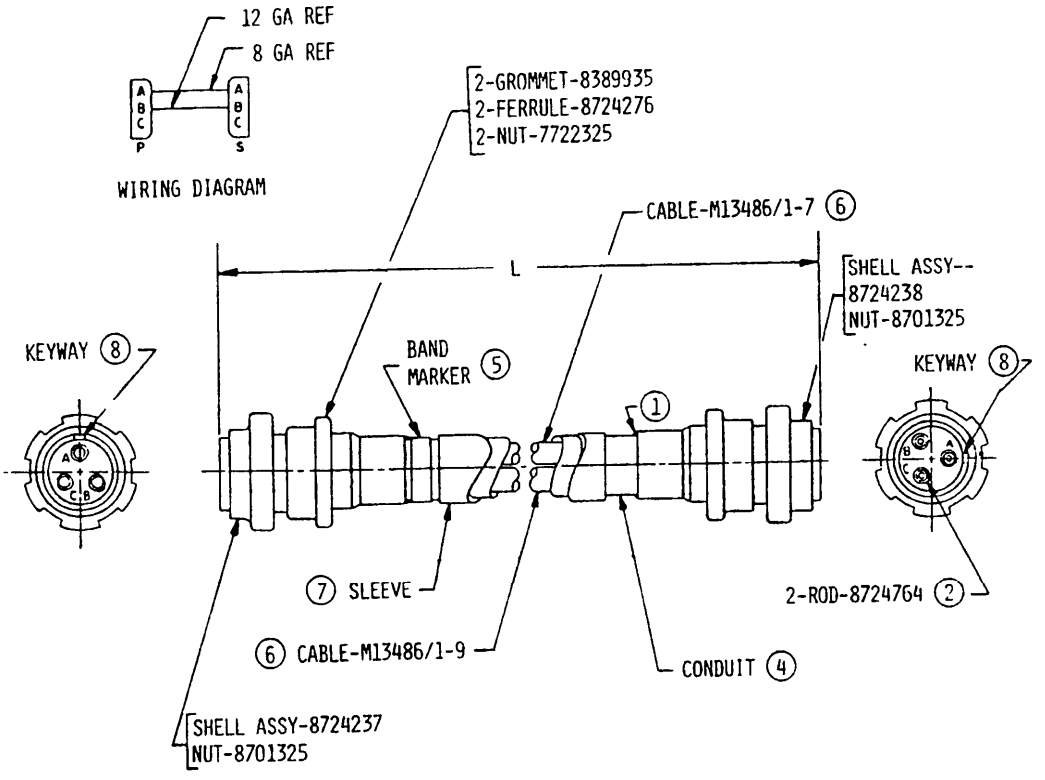


DASH NUMBER	(L) LENGTH	DASH NUMBER	(L) LENGTH	DASH NUMBER	(L) LENGTH
-1	16 ± 1/8	-4	36 ± 1/4	-7	60 ± 1/4
-2	24 ± 1/8	-5	39 ± 1/4	-8	81 ± 1/4
-3	28 ± 1/8	-6	48 ± 1/4	-9	69 ± 1/4

APPROVED 23 SEPT 1980
REVISED (A) 1 APRIL 1986 (B) 25 AUGUST 1980

REVIEW ACTIVITY: DLA-(

The ... Material Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

(B) ENTIRE STANDARD REVISED

P A ARMY-AT Other Cust NONE		TITLE CABLE ASSEMBLY, SPECIAL PURPOSE, ELECTRICAL: GENERATOR TO REGULATOR, 25 AND 40 AMP SYSTEM	MILITARY STANDARD MS51334(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2920-A366

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. SOLDER CONDUCTORS TO PLUG CONTACTS, AND FERRULE TO CONDUIT AT BOTH ENDS IN ACCORDANCE WITH MIL-STD-454, REQUIREMENT 5.
2. GROMMET, HOLE C, SHALL BE PLUGGED AT BOTH ENDS WITH INDICATED ROD.
3. MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
4. CONDUIT SHALL BE TYPE I, GRADE B IN ACCORDANCE WITH MIL-C-13909. INSIDE DIAMETER SHALL BE 5/8 INCH. LENGTH SHALL BE AS REQUIRED.
5. BAND MARKER SHALL BE IN ACCORDANCE WITH MIL-B-43436.
6. ELECTRICAL CONDUCTORS SHALL CONFORM TO TYPE I, CLASS A OF MIL-C-13486.
7. CHAFING SLEEVE SHALL BE RUBBER, 1/32 INCH MINIMUM THICKNESS, GRADE SC 615 AC_1 E_3 F_2 MIL-R-3065. LENGTH OF SLEEVE SHALL BE EIGHT (8) INCHES LESS THAN "L" AND SHALL BE CENTERED WITHIN $\pm$ 1/2 INCH.
8. KEYWAY TO BE LOCATED AS SHOWN, BOTH ENDS.
9. CABLE ASSEMBLY SHALL MEET THE FOLLOWING REQUIREMENTS:
   - A. IMMERSION IN ACCORDANCE WITH METHOD 104, TEST CONDITION B OF MIL-STD-202. FOLLOWING TEST, CABLE ASSEMBLY SHALL BE MOUNTED AS IN INTENDED APPLICATION AND OPERATED FOR 5 MINUTES TO ASSURE FUNCTIONAL ACCEPTABILITY.
   - B. HIGH POTENTIAL-ASSEMBLIES SHALL WITHSTAND A POTENTIAL OF 1000 VOLTS R.M.S. AT A FREQUENCY OF 60 C.P.S. APPLIED BETWEEN CONDUCTORS FOR ONE MINUTE; AND BETWEEN CONDUCTORS AND SHIELDING BRAID FOR ONE MINUTE.
   - C. VIBRATION SHALL BE IN ACCORDANCE WITH TEST METHOD 201 OF MIL-STD-202 EXCEPT THAT THE CABLE ASSEMBLY SHALL BE VIBRATED FOR ONE (1) HOUR EACH IN THE VERTICAL PLANE AND LATERAL PLANE. THE CABLE ASSEMBLY SHALL BE CONNECTED TO TWO (2) MATING RECEPTACLES, ONE MOUNTED HORIZONTALLY AND ONE VERTICALLY ON THE VIBRATING DEVICE. SPACING OF RECEPTACLES SHALL BE SUCH AS TO PROVIDE A NON-STRESSED LOOP IN CABLE.
   - D. CABLE ASSEMBLY SHALL MEET THE ELECTROMAGNETIC INTERFERENCE REQUIREMENTS OF MIL-STD-461, CLASS II C.

NOTES:

1. THE "MS" PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS51334-1.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF THE INVITATION OF BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THF ISSUE ADOPTED.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE $\pm$ 1/64 ON FRACTIONS, $\pm$ 0.10 ON DECIMALS, AND $\pm$ 2° ON ANGLES.

APPROVED 23 SEPT 1960 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P. A. ARMY-AT Other Cust NONE		TITLE CABLE ASSEMBLY, SPECIAL PURPOSE, ELECTRICAL: GENERATOR TO REGULATOR, 25 AND 40 AMP SYSTEM	MILITARY STANDARD MS51334(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 53 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.