
April 22, 2009 10:01 AM [_PAA322203]

REVIEWER: AT,AV,GL,IS,MI,MU,NSA
USER: EL,MC,ME,YD,05,SH

FED. SUP CLASS
5310

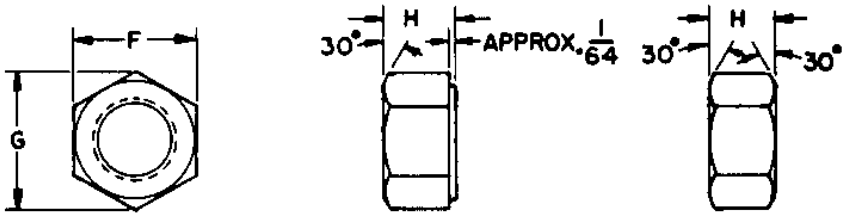

ACCEPTABLE DESIGNS

TABLE I

NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD		1/4 .2500	5/16 .3125	3/8 .3750	7/16 .4375	1/2 .5000	9/16 .5625	5/8 .6250	3/4 .7500	7/8 .8750	1 1.0000
THREADS PER INCH		20	18	16	14	13	12	11	10	9	8
F WIDTH ACROSS FLATS	NOM.	7/16	1/2	9/16	11/16	3/4	7/8	15/16	1-1/16	1-5/16	1-1/2
	MAX.	.4375	.5000	.5625	.6875	.7500	.8750	.9375	1.1250	1.3125	1.5000
	MIN.	.428	.489	.551	.675	.736	.861	.922	1.088	1.269	1.450
G WIDTH ACROSS CORNERS	MAX.	.505	.577	.650	.794	.866	1.010	1.083	1.299	1.516	1.732
	MIN.	.488	.557	.628	.768	.840	.982	1.051	1.240	1.447	1.653
H THICKNESS	NOM.	7/32	17/64	21/64	3/8	7/16	31/64	35/64	41/64	3/4	55/64
	MAX.	.226	.273	.337	.385	.448	.496	.559	.665	.776	.887
	MIN.	.212	.258	.320	.365	.427	.473	.535	.617	.724	.831
MATERIAL		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
STEEL, CARBON GRADE	~~A~~*	~~1~~	~~4~~	~~7~~	~~10~~	~~13~~	~~16~~	~~19~~	~~22~~	~~25~~	~~28~~
	B	2	5	8	11	14	17	20	23	26	29
	C	3	6	9	12	15	18	21	24	27	30

NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD		1-1/8 1.1250	1-1/4 1.2500	1-3/8 1.3750	1-1/2 1.5000	1-3/4 1.7500	2 2.0000	2-1/4 2.2500	2-1/2 2.5000	2-3/4 2.7500	3 3.0000
THREADS PER INCH		7	7	6	6	5	4-1/2	4-1/2	4	4	4
F WIDTH ACROSS FLATS	NOM.	1-11/16	1-7/8	2-1/16	2-1/4	2-5/8	3	3-3/8	3-3/4	4-1/8	4-1/2
	MAX.	1.6875	1.8750	2.0625	2.2500	2.6250	3.0000	3.3750	3.7500	4.1250	4.5000
	MIN.	1.631	1.812	1.994	2.175	2.538	2.900	3.262	3.625	3.988	4.350
G WIDTH ACROSS CORNERS	MAX.	1.949	2.165	2.382	2.598	3.031	3.464	3.897	4.330	4.763	5.196
	MIN.	1.859	2.066	2.273	2.480	2.893	3.306	3.719	4.133	4.546	4.959
H THICKNESS	NOM.	31/32	1-1/16	1-11/64	1-9/32	1-1/2	1-23/32	1-59/64	2-9/64	2-23/64	2-37/64
	MAX.	.999	1.094	1.206	1.317	1.540	1.763	1.970	2.193	2.415	2.638
	MIN.	.939	1.030	1.138	1.245	1.460	1.675	1.874	2.089	2.303	2.518
MATERIAL		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
STEEL, CARBON GRADE	~~A~~*	~~31~~	~~34~~	~~37~~	~~40~~	~~43~~	~~46~~	~~49~~	~~52~~	~~55~~	~~58~~
	B	32	35	38	41	44	47	50	53	56	59
	C	33	36	39	42	45	48	51	54	57	60

MATERIAL: Steel, Carbon, Grade ~~A~~, B, or C, in accordance with procurement specification. Finished nuts shall meet the required proof loads as specified in the procurement specification.

PROTECTIVE COATING: Cadmium plate in accordance with procurement specification.

THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.

DIMENSIONS: All dimensions are in inches, unless otherwise specified.

PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS51967-2.

NOTES: (1) Referenced documents shall be of the issue in effect on date of invitations for bid.
(2) For design feature purpose, this standard takes precedence over procurement documents referenced herein.

*CANCELLED, see Table II.

(D) For changes see sheet 3.

APPROVED 20 JAN 1964 REVISED (A) 10 APR 64 (B) 8 SEPT 1966 (C) 17 NOV 1966 (D) 30 MAR 1970

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC
Other Cust
82

TITLE
NUT, PLAIN, HEXAGON—CARBON STEEL, CADMIUM PLATED, UNC—2B (IN./MM)

MILITARY STANDARD
MS 51967

PROCUREMENT SPECIFICATION
FF-N-836

SUPERSEDES:
MS35690 in part and BUNX1 in part

SHEET 1 OF 3

DD FORM SEP 67 672-1 (Coordinated) Previous editions of this form are obsolete.

Source: https://acqnet.dla.mil — Downloaded: 2026-10-22T18:15Z
Check the source to verify that this is the current version before use.

April 22, 2009 10:00 AM [_PAA322205]

INTERCHANGEABILITY TABLE

The nuts covered by the following dash numbers given in MS35690 are cancelled after 30 September 1965, as given on that document. The nuts covered by the following cancelled dash numbers given in MS51967 are cancelled after 8 SEPT 1966. The cancelled nuts cannot always replace the new nuts and should be used until existing stocks are depleted. Use only the new nuts for design and replacement. Replacement shall be in accordance with Table II.

TABLE II

PART NUMBER			PART NUMBER			PART NUMBER		
CANCELLED MS35690	CANCELLED MS51967	NEW MS51967	CANCELLED MS35690	CANCELLED MS51967	NEW MS51967	CANCELLED MS35690	CANCELLED MS51967	NEW MS51967
DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
	1	2		22	23		43	44
402		2	1202		23	2802		44
403		2	1203		23	2803		44
405		2	1205		23	2805		44
406		2	1206		23	2806		44
408		3	1208		24	2808		45
409		3	1209		24	2809		45
	4	5		25	26		46	47
502		5	1402		26	3202		47
503		5	1403		26	3203		47
505		5	1405		26	3205		47
506		5	1406		26	3206		47
508		6	1408		27	3208		48
509		6	1409		27	3209		48
	7	8		28	29		49	50
602		8	1602		29	3602		50
603		8	1603		29	3603		50
605		8	1605		29	3605		50
606		8	1606		29	3606		50
608		9	1608		30	3608		51
609		9	1609		30	3609		51
	10	11		31	32		52	53
702		11	1802		32	4002		53
703		11	1803		32	4003		53
705		11	1805		32	4005		53
706		11	1806		32	4006		53
708		12	1808		33	4008		54
709		12	1809		33	4009		54
	13	14		34	35		55	56
802		14	2002		35	4402		56
803		14	2003		35	4403		56
805		14	2005		35	4405		56
806		14	2006		35	4406		56
808		15	2008		36	4408		57
809		15	2009		36	4409		57
	16	17		37	38		58	59
902		17	2202		38	4802		59
903		17	2203		38	4803		59
905		17	2205		38	4805		59
906		17	2206		38	4806		59
908		18	2208		39	4808		60
909		18	2209		39	4809		60
	19	20		40	41			
1002		20	2402		41			
1003		20	2403		41			
1005		20	2405		41			
1006		20	2406		41			
1008		21	2408		42			
1009		21	2409		42			

NOTE: For material, protective coating, and other pertinent data, see sheet 1.

REVIEWER:AT,AV,GL,IS,MI,MU,NSA
USER:EL,MC,ME,YD,OS,SH

APPROVED 20 JAN 1964 REVISED (A) 10 APR 1964 (B) 8 SEP 1966 (C) 17 NOV 1966 (D) FOR CHANGES SEE SHEET 3.


This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust 82	NUT, PLAIN, HEXAGON — CARBON STEEL, CADMIUM PLATED, UNC-2B (IN./MM)	MS51967
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: MS35690 in part and BUNX1 in part	SHEET 2 OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

April 22, 2009 9:55 AM [_PAA322207]

FED. SUP CLASS
5310

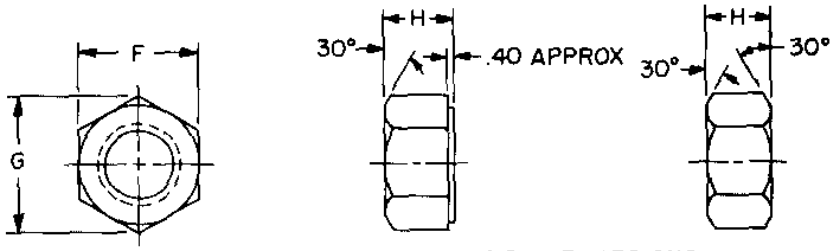

ACCEPTABLE DESIGNS

TABLE III
METRIC TRANSLATION OF TABLE I

	NOMINAL SIZE	INCH / MM	1/4 6.350	5/16 7.938	3/8 9.525	7/16 11.112	1/2 12.700	9/16 14.288	5/8 15.875	3/4 19.050	7/8 22.225	1 25.400
	THREADS PER 25.4 MM		20	18	16	14	13	12	11	10	9	8
F	WIDTH ACROSS FLATS	NOM	11.112	12.700	14.288	17.462	19.050	22.225	23.812	28.575	33.338	38.100
		MAX	11.112	12.700	14.288	17.462	19.050	22.225	23.812	28.575	33.338	38.100
		MIN	10.871	12.421	13.995	17.145	18.694	21.869	23.419	27.635	32.233	36.830
G	WIDTH ACROSS CORNERS	MAX	12.827	14.656	16.510	20.168	21.996	25.654	27.508	32.995	38.506	43.993
		MIN	12.395	14.148	15.951	19.507	21.336	24.943	26.695	31.496	36.754	41.986
H	THICKNESS	NOM	5.556	6.747	8.334	9.525	11.112	12.303	13.891	16.272	19.050	21.828
		MAX	5.740	6.934	8.560	9.779	11.379	12.598	14.199	16.891	19.710	22.530
		MIN	5.385	6.553	8.128	9.271	10.846	12.014	13.589	15.672	18.390	21.107
	MATERIAL		DASH NUMBER									
	GRADE B		2	5	8	11	14	17	20	23	26	29
	GRADE C		3	6	9	12	15	18	21	24	27	30

	NOMINAL SIZE	INCH / MM	1-1/8 28.575	1-1/4 31.750	1-3/8 34.925	1-1/2 38.100	1-3/4 44.450	2 50.800	2-1/4 57.150	2-1/2 63.500	2-3/4 69.850	3 76.200
	THREADS PER 25.4 MM		7	7	6	6	5	4-1/2	4-1/2	4	4	4
F	WIDTH ACROSS FLATS	NOM	42.862	47.625	52.388	57.150	66.675	76.200	85.725	95.250	104.775	114.300
		MAX	42.862	47.625	52.388	57.150	66.675	76.200	85.725	95.250	104.775	114.300
		MIN	41.427	46.025	50.648	55.245	64.465	73.660	82.855	92.075	101.295	110.490
G	WIDTH ACROSS CORNERS	MAX	49.505	54.991	60.503	65.989	76.987	87.986	98.984	109.982	120.980	131.978
		MIN	47.219	52.476	57.734	62.992	73.482	83.972	94.463	104.978	115.468	125.959
H	THICKNESS	NOM	24.606	26.988	29.767	32.538	38.100	43.662	48.819	54.370	59.919	65.482
		MAX	25.375	27.788	30.632	33.452	39.116	44.780	50.038	55.702	61.341	67.005
		MIN	23.850	26.162	28.905	31.623	37.084	42.545	47.600	53.061	58.496	63.957
	MATERIAL		DASH NUMBER									
	GRADE B		32	35	38	41	44	47	50	53	56	59
	GRADE C		33	36	39	42	45	48	51	54	57	60

NOTE:
All dimensions are in millimeters (MM), unless otherwise specified.

(D) SHEET 3 ADDED

APPROVED 20 JAN 1964 REVISED (D) FOR CHANGES SEE SHEET 3.

REVIEWER: AT, AV, GL, IS, MI, MU, NSA
USER: EL, MC, ME, YD, 05, SH

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust 82	TITLE NUT, PLAIN, HEXAGON - CARBON STEEL, CADMIUM PLATED, UNC-2B (IN./MM)	MILITARY STANDARD MS 51967
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: MS35690 in part and BUNX1 in part.	SHEET 3 OF

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2020-10-28T18:15Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-096/5-5240