

FED. SUP CLASS
2350

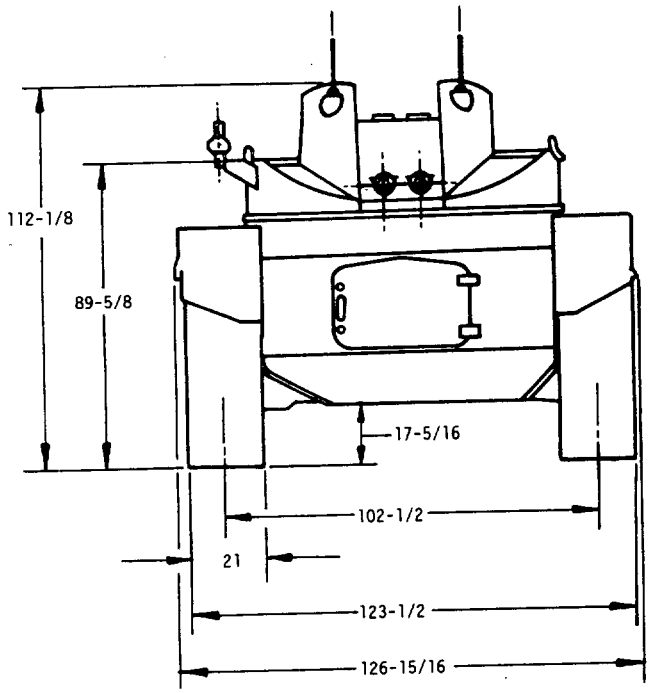

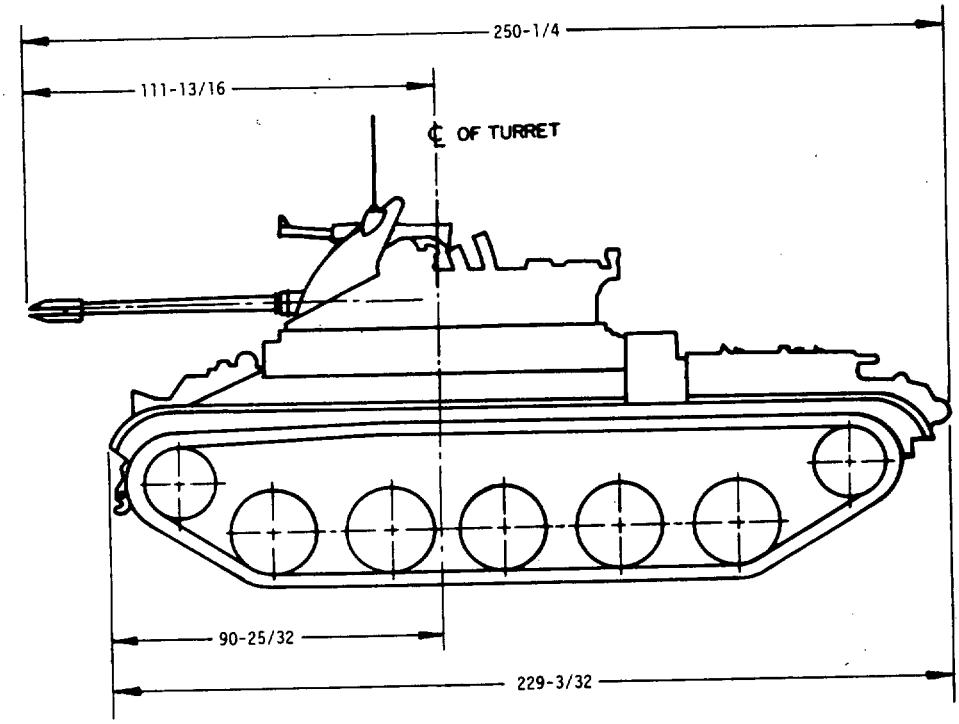

APPROVED 4 MARCH 1964 REVISED (B) 3 JUL 85

(B) ENTIRE STANDARD REVISED

MS PART NO.	DRAWING NO.
MS 51978 -1	8750204

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: GUN, ANTIAIRCRAFT ARTILLERY, SELF-PROPELLED: TWIN 40 MM, M42 A1	MILITARY STANDARD MS51978(AT)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2350

VEHICLE CHARACTERISTICS

WEIGHT:

COMBAT LOADED	49,800 LBS
6 MAN CREW	
LESS CREW, STOWAGE AND FUEL	44,300 LBS
GROUND PRESSURE	9.3 LBS/SQ IN

VISION AND SIGHTING EQUIPMENT:

2 PERISCOPE, VISION, DRIVER'S	M13 OR M13B1
2 PERISCOPE, SIGHT, COMMANDER'S	M13 OR M13B1
1 SIGHT, COMPUTING	M38
1 SIGHT, REFLEX	M24C
2 SIGHT, RING	
1 QUADRANT, GUNNER'S	M1A1
1 PERISCOPE, VISION, DRIVER (OTHER)	M19
1 INDICATOR, AZIMUTH	M27

ARMAMENT:

PRIMARY GUN, DUAL/AUTOMATIC	M2A1
MOUNT	M4E1
RECOIL MECH, TYPE SPRING AND OIL RECUPERATOR	
TRAVERSE, RIGHT	360°
LEFT	360°
RATE	40°/SEC
POWER, TYPE HYDRAULIC, MANUAL GEAR AND PINION	
ELEVATION	85°
DEPRESSION	30°
RATE	25°/SEC
STABILIZER SYSTEM	NONE

SECONDARY ARMAMENT:

1 MACHINE GUN, 7.62MM FLEX RT FRT GUN MT OR REAR GUN MT, TRAVERSE	M60 360°
ELEVATION, RT FRT	76°
REAR	60°
1 SUB MACH GUN, 45 CAL CREW COMP	M3A1
5 RIFLE, 7.62MM OR 5.56MM GUN MT 4, CREW COMP 1	M14 M16
1 ROCKET LAUNCHER, BOX, REAR DECK	M20

AMMUNITION:

40 MM	480 ROUNDS
7.62MM, MG, LINK METALLIC BELT	1750 ROUNDS
45 CAL	180 ROUNDS
7.62MM OR 5.56MM, RIFLE	900 ROUNDS
3.5 IN ROCKETS	4
GRENADES	8

RUNNING GEAR:

SUSPENSION, TYPE TORSION BAR	
5 DUAL WHEELS, EA SIDE, SIZE	25-1/2
TRACK, T91E3, STEEL W/ DETACHABLE RUBBER PADS, CENTER GUIDE, SINGLE PIN	
SHOES, PITCH 6, WIDTH 21	75/TRACK
TIRES, SOLID RUBBER, 25-1/2 X 4-1/2 NO 20	

ELECTRICAL SYSTEM:

NOMINAL VOLTAGE	24 VOLTS
GENERATOR, MAIN, 150 AMPS	7727461
GENERATOR, AUX, 300 AMPS	7402950
4 BATTERIES, 6TN, 12V, 100 AMP HRS	MS35000-4
2 IGNITION SYSTEMS, MAGNETO	7974214 & 7974215
COIL	MS51355-1
DISTRIBUTOR	7403411
STARTER	7538988

ENGINE:

6 CYL, HORIZONTAL OPPOSED, AIR COOLED	8376655
FUEL INJECTION	MS51314-1
DISPLACEMENT	895 CU IN
BORE 5.75 STROKE 5.75	
FUEL, GASOLINE, 80 OCTANE (APPROX)	140 GAL
GOVERNED SPEED	2950 RPM
COMPRESSION RATIO	5.5:1
MAX GROSS HORSEPOWER 500@	2800 RPM
MAX NET HORSEPOWER 446@	2400 RPM
MAX GROSS TORQUE 955 LB/FT@	2400 RPM
MAX NET TORQUE 890 LB/FT@	2200 RPM
MAIN COOLING SYSTEM	AIR
OIL COOLING SYSTEM	LIQUID
ENGINE OIL CAPACITY	44 QTS

POWER TRAIN:

CROSS DRIVE TRANSMISSION	7527947
HYD CONVERTER SINGLE STAGE MULTIPHASE STALL MULTIPLICATION	4:1
OVERALL USEABLE RATIO, LOW 15.3:1, HIGH 4:1, DIRECT 1:1, REVERSE 15:1	
STEERING RATE	6.8 RPM
TURNING RADIUS, PIVOT TO INFINITY	
STEERING CONTROL TEE BAR SERVO	
BRAKES MULTIPLE DISC	
OPERATION, MECH FOOT PEDAL	
OIL COOLING SYSTEM, ENGINE MOUNTED COOLER, AIR COOLED WITH ENGINE DRIVEN FAN	

FINAL REDUCTION:

SPUR GEAR, RATIO	4.25:1
FT/REV	1.44
SPROCKET, 23.44 PITCH DIA	12 TEETH

COMMUNICATIONS:

RADIO SET, RT SIDE, COMMANDER	AN/VRC 46
RADIO SET, RT SIDE, COMMANDER	AN/VRC 8,9 OR 10
INTERPHONE, OUTLETS-NONE	AN/UIC-1

FIRE EXTINGUISHER:

FIXED, TWO 10 LB CO_2	7714476
PORTABLE, ONE 5 LB CO_2	7714780

PERFORMANCE:

GROSS HORSEPOWER TO WEIGHT RATIO	20.05 HP/TON
MAX TRACTIVE EFFORT 40,000 LBS	TE/W 93%
MAX SPEED	45 MPH
MAX GRADE	60°
MAX TRENCH CROSSING WIDTH	72 IN
MAX VERTICAL WALL	28 IN
MAX FORDING DEPTH	48 IN
CRUISING RANGE	120 MI

GENERAL:

CENTER OF GRAVITY, ABOVE GROUND	41-3/4 IN
TURRET RING, INSIDE DIA	31 IN

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS. COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

(B) ENTIRE STANDARD REVISED

APPROVED 4 MARCH 1964 REVISED (B) 3 JUL 85

MS PART NO.	DRAWING NO.
MS 51978 -1	8750204

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE GUN, ANTIAIRCRAFT ARTILLERY, SELF-PROPELLED: TWIN 40 MM, M42 A1	MILITARY STANDARD MS51978(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION OBSOLETE EDITION OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.