
FED. SUP CLASS
2320

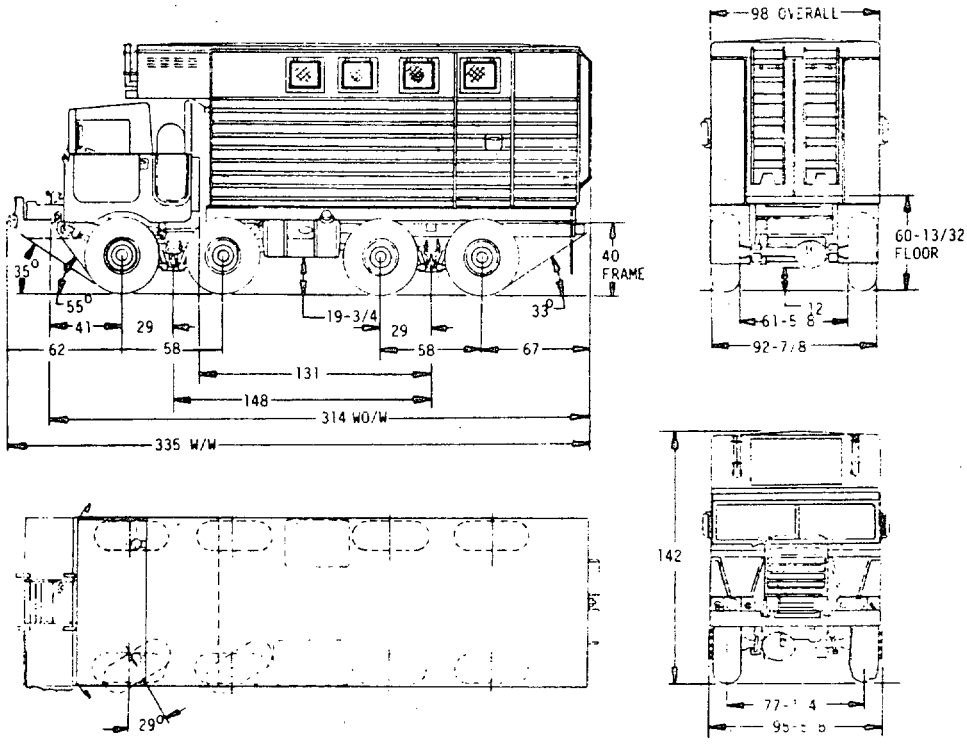

NOTES:

1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH. 48090.

MS PART NO.	ENGINEERING DWG NO.	
MS52171-1	8736825	WITH WINCH
MS52171-2	8736826	LESS WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY-AT Other Cust	TITLE TRUCK VAN 5 TON 8x8 M791	MILITARY STANDARD MS52171(AT)
PROCUREMENT SPECIFICATION MIL-T-62070	SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

FED. SUP CLASS 2320

CURB WEIGHT FULLY EQUIPPED:

LESS PAYLOAD & CREW:	WO/W	W/W
FRONT BOGIE	12,000 LBS	13,700 LBS
REAR BOGIE	12,500 LBS	11,950 LBS
TOTAL	24,500 LBS	25,650 LBS

GROSS LOAD LOADED: 27,550 LBS 28,700 LBS

TOWED LOAD ALLOWANCE:

LOADED	6,000 LBS	6,000 LBS

SHIPPING DIMENSIONS:

CU FT	2,530	2,700
SQ FT	214	228
LENGTH	314	335
WIDTH	98	98

HEIGHT WITH RING MOUNT N/A IN
LESS RING MOUNT 142 IN
REDUCIBLE TO N/A IN

TREAD: FRONT BOGIE 77-1/4
REAR BOGIE 77-1/4
CAB TO CENTERLINE OF REAR BOGIE 131
CENTERLINE OF REAR AXLE TO FRAME END 67
MINIMUM GROUND CLEARANCE, UNDER AXLE OR BOGIE 12
UNDER CHASSIS 19-3/4

ANGLE OF APPROACH: WO/W 55° W/W 35°

ANGLE OF DEPARTURE: 33° 33°

MIN TURNING RADII: (OVER BUMPER)

LEFT	496	506
RIGHT	496	506

FORDING DEPTH: 40 40

ENGINE: 11610102
TYPE 6 CYL OHV. LIQUID COOLED MULTI-FUEL COMPRESSION IGNITION
GOV. SPEED 2800 RPM COMPRESSION RATIO 22:1
DISPLACEMENT 478 CU. IN, BORE & STROKE 4.56 X 4.87
HORSEPOWER MAX. GROSS 200 @ 2800 RPM
NET 175 @ 2800 RPM
TORQUE MAX. GROSS 450 LB FT @ 1800 RPM
MAX. NET 430 LB FT @ 1800 RPM
LUBRICATION FULL PRESSURE CRANKCASE, CAPACITY 20 QTS
GOVERNOR, TYPE MECHANICAL CENTRIFUGAL INTEGRAL WITH INJECTION PUMP
COOLING CAPACITY 36 QTS, BELT DRIVE PUMP

FUEL SYSTEM: INJECTION, PUMP ELECTRIC IN TANK, CAPACITY 80 GALS

TRANSMISSION: 8357182
NO OF SPEEDS, 6 FORWARD 1 REVERSE
RATIOS: 1ST 5.296; 2ND 3.810; 3RD 2.690; 4TH 1.936; 5TH 1.390; 6TH 1.000; REVERSE 6.042; CONVERTER 3.0
PTO OPENINGS: 2 INPUT TORQUE RATING: 150 LB FT
LUBRICANT CAPACITY: W/PTO 19 QTS
WO/PTO 19 QTS

TRANSFER CASE: 11601806
NO OF SPEEDS: 1 RATIO: 1.044
CONTROL OF FRONT AXLE DRIVE, AIR
LUBRICANT, CAPACITY 3 QTS

WINCH: 11613973
CAPACITY 20,000 LBS @ 1ST DRUM LAYER
CABLE DIA 5/8
CABLE LENGTH 200 FT PTO SPEEDS 1 FWD 1 REV

CENTER OF GRAVITY LOCATION: (INCHES)

		EMPTY	LOADED
REAR OF FRONT BOGIE	WO/W	75-1/2	81-3/8
	W/W	69	75-3/16

VAN BODY: TRUCK EXPANSIBLE (17 FEET) 11614230

AXLES: FRONT RATIO: 6.400:1 11614033
LUBRICATION CAPACITY 8 QTS
TYPE FULL FLOATING, SINGLE SPEED, DOUBLE REDUCTION
REAR 11614034 RATIO 6.400:1 LUB CAP 8 QTS
TYPE FULL FLOATING, SINGLE SPEED, DOUBLE REDUCTION

FRONT BOGIE SPRINGS: 10945189, SIZE, 3-1/2
WIDE X 53 LONG
3 TAPERED LEAVES RATE 2500 LB IN
WHEEL BASE 58

SHOCK ABSORBERS: 11601499, TYPE TELESCOPIC
NO REQ D 4, FRONT AND REAR

REAR BOGIE SPRINGS: 11614216, SIZE 3-1/2
WIDE X 63 LONG
4 TAPERED LEAVES RATE 3250 LB, WHEELBASE 58

STEERING: FRONT 4 WHEELS TYPE WORM & ROLLER W/POWER ASSIST
RATIO: 20.6:1 CRAMPING ANGLE 29° RT 29° LT (#1 AXLE)

BRAKES: SERVICE 11602480 TYPE SEALED INTERNAL-EXPANDING
DRUM SIZE, FRONT 14 DIA X 3 WIDE, REAR 14 DIA X 3 WIDE
TOTAL EFFECTIVE AREA, FRONT BOGIE 324 SQ IN
REAR BOGIE 324 SQ IN, ACTUATION AIR PRESSURE

BRAKES PARKING 11602247, TYPE INTERNAL-EXPANDING
DRUM SIZE 12 DIA X 3 WIDE, EFFECTIVE AREA 83 SQ IN

FRAME: TYPE LADDER, DIMENSIONS 9 X 2-13/16 X .224 IN
SECTION MODULUS 8, NO OF CROSSMEMBERS 5
REINFORCED NONE

CAB: TYPE OPEN - OVER ENGINE, CAPACITY 2
SOFTTOP 11600454 HARDTOP 11600453

ELECTRICAL SYSTEM: WATERPROOF YES, RADIO SUPPRESSED YES
POTENTIAL 24 VOLTS STARTING MOTOR 10951385-2
ALTERNATOR 11613630, RATING 30-80 AMP BELT DRIVE
BATTERIES, TYPE 6TN NO REQ'D 2 MS35000-4
TURN SIGNAL 11613621 & 11613622
TRAILER COUPLING SOCKET MS75021-2

PERFORMANCE: MAXIMUM SPEED 50 MPH AT ENGINE GOV SPEED 2800 RPM

PINTLE HOOK: 11614111, CAPACITY 100,000 LBS

TIE DOWNS: QTY 12, LOCATION FRAME, 4 EACH SIDE 2 FRONT 2 REAR

TIRES: 11602256, TYPE LOW PROFILE SIZE 16-20, RATING 10 PLY
TREAD DESIGN NDCC, NO SPARES

WHEELS: 11600643, TYPE SEMI DROP CENTER, SIZE 20 DIA. X 12
FRONT SINGLE REAR SINGLE

MS PART NO.	ENGINEERING DWG NO.	
MS52171-1	8736825	WITH WINCH
MS52171-2	8736826	LESS WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY-AT Other Cust	TITLE TRUCK VAN 5 TON 8x8 M791	MILITARY STANDARD MS52171(AT)
PROCUREMENT SPECIFICATION MIL-T-62070	SUPERSEDES	SHEET 2 OF 2

DD FORM 672-1 (SEP 87) (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.