Reviewer user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing)
AF 11, 85, 17 @ 19, 14   Army EL, MU   Navy WP, SH @ MC

FED SUP CLASS
5950

CASE, MOUNTING, TERMINAL ARRANGEMENT, AND MARKING

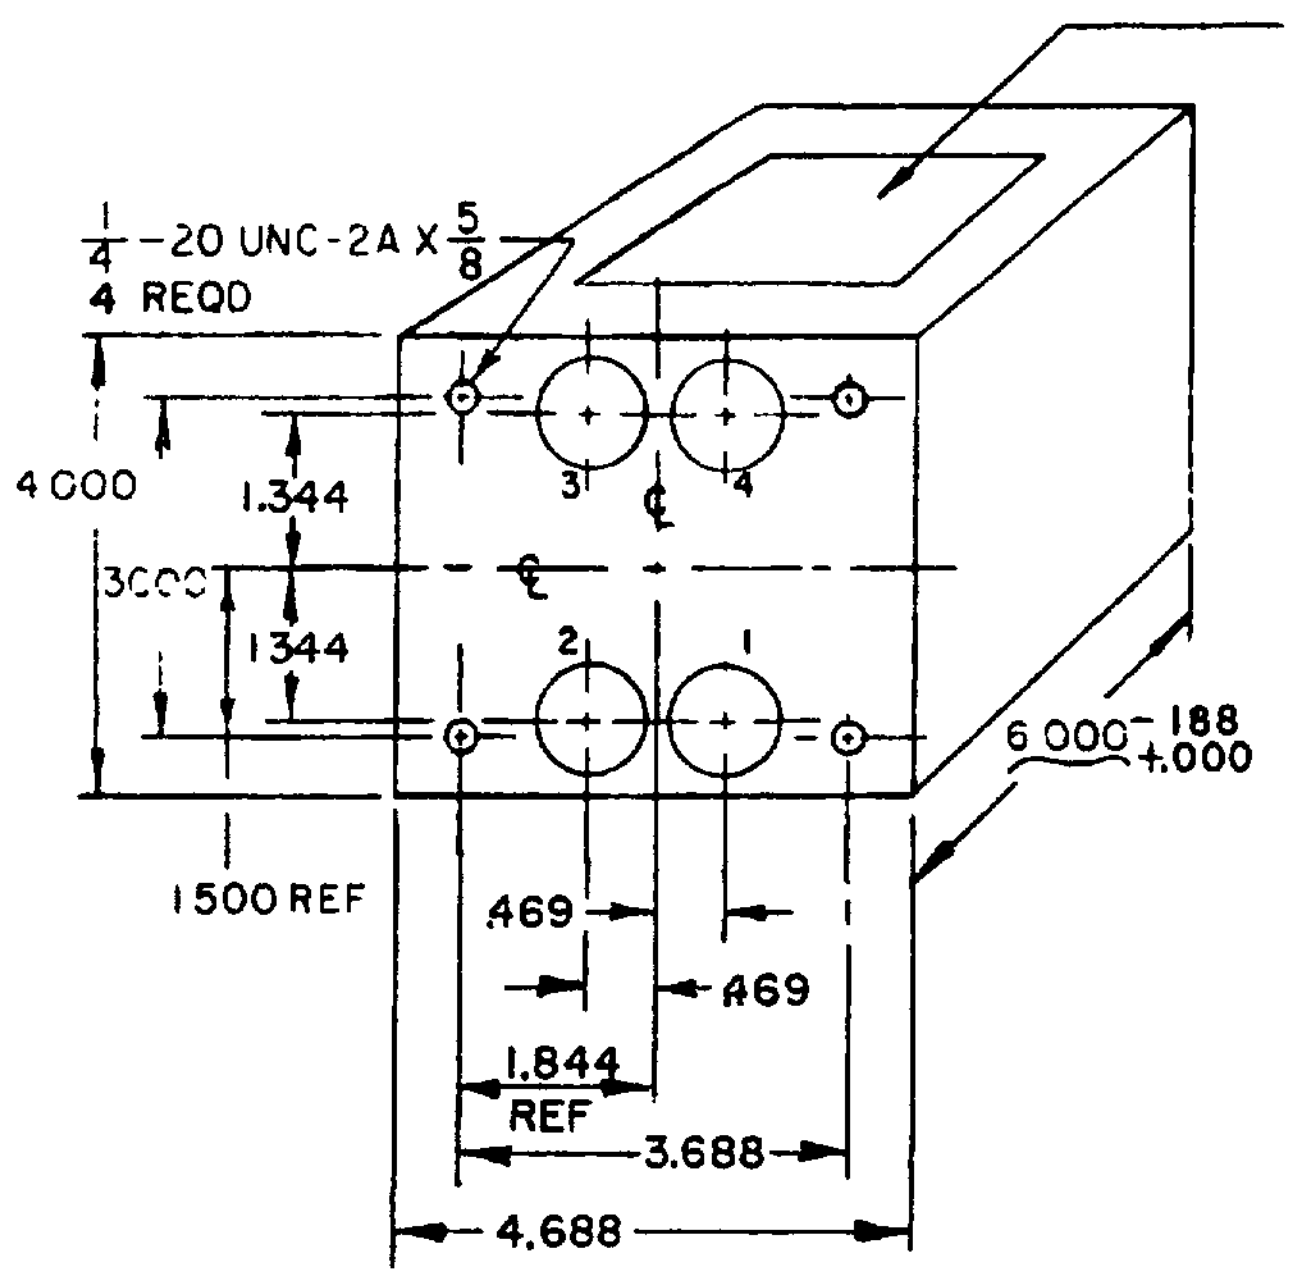

MINIMUM CHASSIS CUTOUT

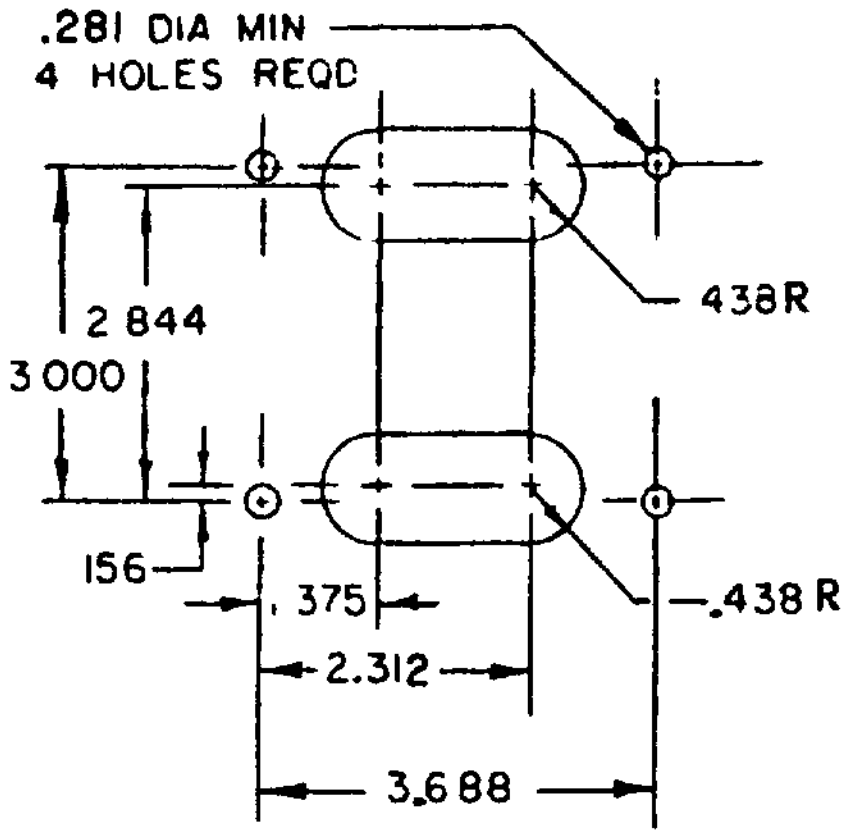

INCHES	MM	INCHES	MM
.156	3.96	2.312	58.72
.188	4.78	2.844	72.24
.281	7.14	3.000	76.20
.438	11.13	3.688	93.68
.469	11.91	4.000	101.60
1.344	34.14	4.688	119.08
1.375	34.93	6.000	152.40
1.500	38.10	5/8	15.88
1.844	46.84		

CIRCUIT DIAGRAM AND MARKING

WORKING VOLTAGE 3,500 V MAX

120 CPS

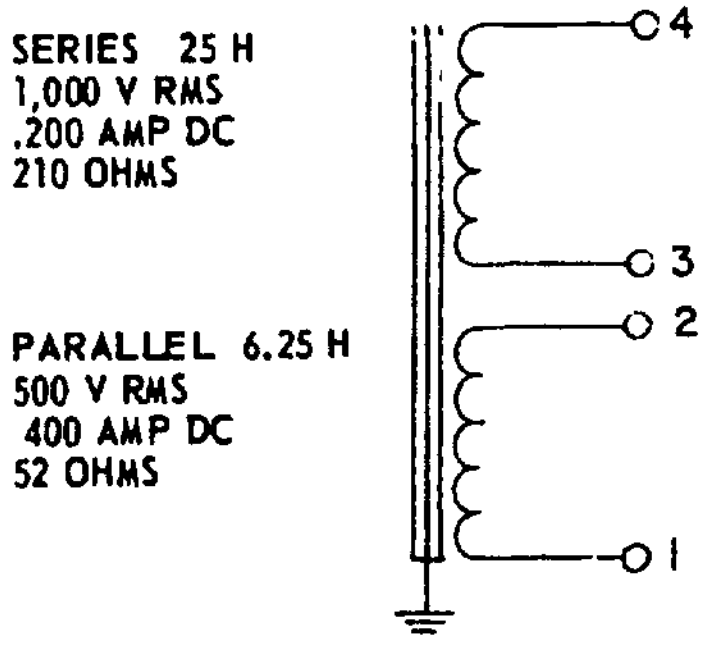

MAX ALTITUDE 10,000 FT

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 28 MAY 1981
NO SUPERSEDING STANDARD

NOTES
1. All dimensions in inches.
2. Unless otherwise specified, tolerance on overall case dimensions is +.000 (.00 mm), –.125 (3.18 mm).
3. Tolerance on mounting dimensions is ±.047 (1.19 mm). Mounting studs are symmetrically located with respect to the centerlines of the case.
4. Tolerance on terminal positioning dimensions is ±.125 (3.18 mm). Terminals fit within minimum chassis cutout.
5. Type designation, MS part no. and manufacturer's name or code symbol to be marked on side opposite terminals.
6. Referenced document shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement document referenced herein.
8. Metric equivalents (to the nearest .01 mm) are shown for general information only and are based upon 1 inch = 25.4 mm.

Ⓓ ENTIRE STANDARD REVISED

MS PART NO.	MS75001-2

APPROVED 9 JUNE 1958   REVISED Ⓐ 29 NOV 1960 Ⓑ 21 September 1965 Ⓒ 28 MAY 1981 Ⓓ 20 MAY 1982

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A **Army-ER** Other Cust **Navy - EC** **Air Force-85**	TITLE INDUCTOR, POWER, TYPE TF4RX04MA010	MILITARY STANDARD MS 75001
Procurement Specification MIL-T-27	SUPERSEDES	PAGE 1 OF 2

DD FORM 672 25 OCT 63 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5950-0604-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing)

AF Ⅱ 11, 85, 17 @ 19, 14   Army Ⅱ EL, MU   Navy Ⅱ WP, SH @ MC

FED SUP CLASS
5950

APPROVED 9 JUNE 1958 REVISED Ⓐ 29 NOV 1960 Ⓑ SEE PG 1 FOR CHANGES Ⓓ SEE PG 2 FOR CHANGES 20 MAY 1982

ELECTRICAL RATING

Inductance:		DC resistance	
(1–4)	25 h min	(1–2)	90 ohms, ±10%
(1–3) and (2–4)	6.25 h min	(3–4)	120 ohms, ±10%
Current.		Duty cycle	Continuous
(1–4)	.200 amp dc	Life expectancy	10,000 hr min
(1–3) and (2–4)	.400 amp dc	Working voltage	
Voltage·		(1–4)	3,500 v max
(1–4)	1,000 v rms	(1–3) and (2–4)	3,500 v max
(1–3) and (2–4)	500 v rms	Altitude	10,000 ft max
Frequency	120 cps, ±10%	Operating temperature	105° C max

Note When numbers in parentheses, eg (1–2), are used, they indicate the winding and the extreme terminals of the winding. When the extreme terminals of both windings are used, eg (1–4), the windings are connected in series, ie, terminals 2 and 3 are connected. When the extreme terminal of one winding and the extreme terminal of another winding are used, eg (1–3) and (2–4), the windings are connected in parallel.

PHYSICAL CHARACTERISTICS

Case size	MA
Weight	20 lb max
Terminals	Solder lug, No. 18 AWG
Terminal height	1.625 (41.28 mm) $^{+.000}_{-.688}$ (17.48 mm)
Shock	Method I, test condition C (50 G)

TEST	ELECTRICAL PROPERTIES				LIMITS
Dielectric withstanding voltage: At sea level	Windings	(1–4)	(1–3)	(2–4)	- - -
	Volts rms	5, 900	5, 900	5, 900	
DC resistance and resistive unbalance	(1–2) 90 ohms (3–4): 120 ohms Resistive unbalance not applicable				±10% ±10%
Inductance and inductive unbalance	With 50 v, 120 cps, and .200 amp dc applied to (1–4) 25 h With 50 v, 120 cps, and .400 amp dc applied to (1–3) and (2–4) 6.25 h Inductive unbalance not applicable				Min Min
Polarity	Additive, with terminals 2 and 3 connected				- - -
Temperature rise	40° C with 1,000 v, 108 cps, and .200 amp dc applied to (1–4) at an ambient temperature of 65° C				Max

Ⓓ QUALITY ASSURANCE PROVISIONS.
QUALIFICATION INSPECTION: NOT APPLICABLE FOR THIS SPECIFICATION.

QUALITY CONFORMANCE INSPECTION: GROUP A AND B TESTS OF MIL-T-27 SHALL BE APPLICABLE.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

PA Army – ER Other Cust Navy – EC Air Force – 85	TITLE INDUCTOR, POWER, TYPE TF4RX04MA010	MILITARY STANDARD **MS 75001**
Procurement Specification MIL-T-27	SUPERSEDES	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:26Z
Check the source to verify that this is the current version before use.