
FED. SUP CLASS
5306

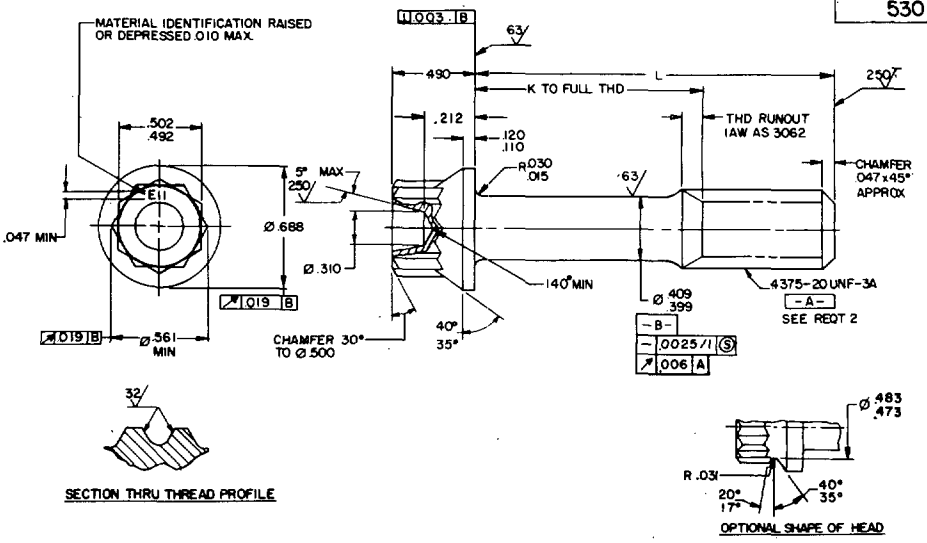

SECTION THRU THREAD PROFILE

OPTIONAL SHAPE OF HEAD

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NO.	L	K +.000 -.060	APPROX WEIGHT LBS/100
-06	.812	1/	5.51
-07	.875	1/	5.74
-08	.938	1/	5.97
-09	1.000	1/	6.20
-10	1.062	1/	6.43
-11	1.125	1/	6.67
-12	1.188	1/	6.90
-13	1.250	.125	7.13
-14	1.312	.188	7.36
-15	1.375	.250	7.59
-16	1.438	.312	7.82
-17	1.500	.375	8.05
-18	1.562	.438	8.27
-19	1.625	.500	8.50
-20	1.688	.562	8.73
-21	1.750	.625	8.96
-22	1.875	.750	9.43
-23	2.000	.875	9.90
-24	2.125	1.000	10.38
-25	2.250	1.125	10.85
-26	2.375	1.250	11.32
-27	2.500	1.375	11.79
-28	2.625	1.500	12.26
-29	2.750	1.625	12.72
-30	2.875	1.750	13.19
-31	3.000	1.875	13.66
-32	3.125	2.000	14.12
-33	3.250	2.125	14.59
-34	3.375	2.250	15.06
-35	3.500	2.375	15.52
-36	3.625	2.500	15.99
-37	3.750	2.625	16.45
-38	3.875	2.750	16.92
-39	4.000	2.875	17.39
-40	4.125	3.000	17.85
-41	4.250	3.125	18.31
-42	4.375	3.250	18.75
-43	4.500	3.375	19.31
-44	4.625	3.500	19.66
-45	4.750	3.625	20.12
-46	4.875	3.750	20.59
-47	5.000	3.875	21.05
-48	5.125	4.000	21.51
-49	5.250	4.125	21.97
-50	5.375	4.250	22.33
-51	5.500	4.375	22.30
-52	5.625	4.500	23.27
-53	5.750	4.625	23.74
-54	5.875	4.750	24.21
-55	6.000	4.875	24.67

1/ THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

REQUIREMENTS:

INACTIVE FOR NEW DESIGN AFTER 26 OCT 72
NO SUPERSEDING STANDARD

1. MATERIAL: STEEL AMS 6322
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. HARDNESS: 26-32 HRC
4. FINISH: BLACK OXIDE TREATMENT IN ACCORDANCE WITH AMS 2485
5. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M
6. WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS 870.
7. SURFACE TEXTURE: SURFACE TEXTURE UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD, IN ACCORDANCE WITH ANSI B46.1

Ⓑ ENTIRE STANDARD REVISED

APPROVED 5 AUG 57 REVISED Ⓑ 22 JUN 87

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust		BOLT-MACHINE, STEEL, 12 POINT HEAD, .4375-20, BLACK OXIDE	MS9161(AS)
PROCUREMENT SPECIFICATION AMS7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-N157

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:11Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5306

8. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION IN ACCORDANCE WITH AMS 2640

9. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.

10. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9161-06

- DASH NUMBER
- BASIC MS NUMBER

MS9161-06 INDICATES: BOLT-MACHINE, STEEL, 12 POINT HEAD, .4375-20, BLACK OXIDE, .812 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. DO NOT USE UNASSIGNED PART NUMBER
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS

APPROVED 5 AUG 57 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust		BOLT-MACHINE, STEEL, 12 POINT HEAD, .4375-20, BLACK OXIDE	MS9161(AS)
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

★U.S. GOVERNMENT PRINTING OFFICE:1987 704-036/73909

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T19:11:12
Check the source to verify that this is the current version before use.