
MS9899

FED. SUP CLASS 5306

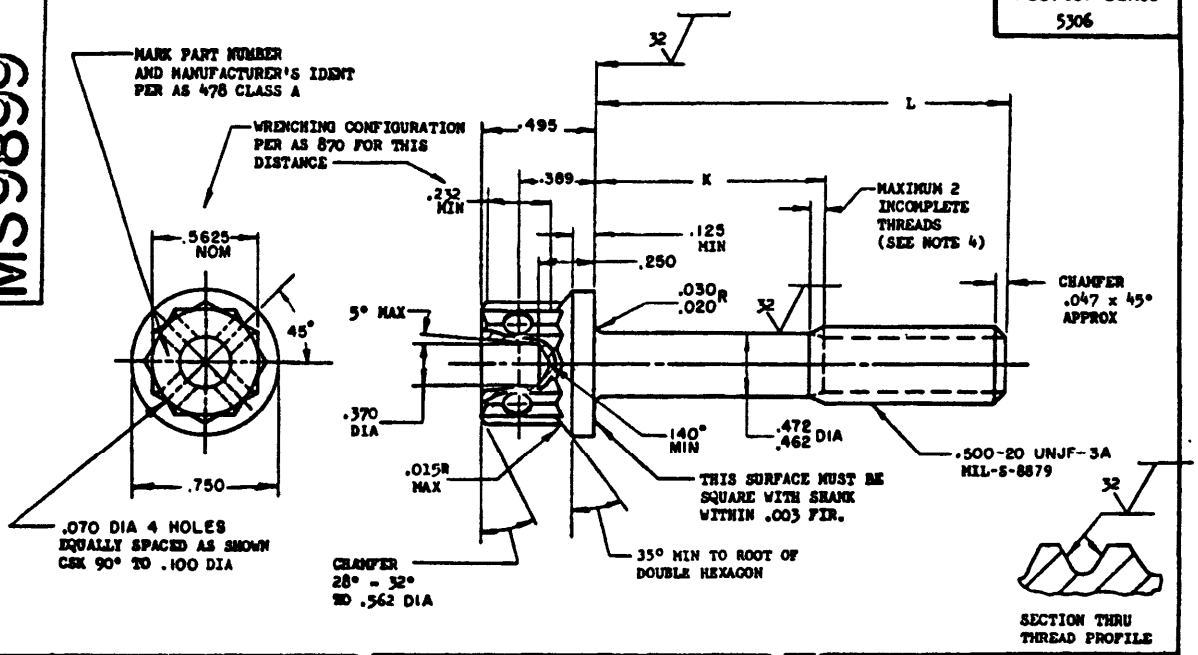

PART NO.	L	K	APPROX WEIGHT LB/100
MS9899-03	.750	.105- .125	7.64
MS9899-04	.812	.105- .125	7.95
MS9899-05	.875	.105- .125	8.24
MS9899-06	.938	.105- .125	8.55
MS9899-07	1.000	.105- .125	8.96
MS9899-08	1.062	.105- .125	9.18
MS9899-09	1.125	.105- .125	9.50
MS9899-10	1.188	.105- .125	9.82
MS9899-11	1.250	.105- .125	10.14
MS9899-12	1.312	.105- .125	10.44
MS9899-13	1.375	.105- .125	10.74
MS9899-14	1.438	.128- .188	11.05
MS9899-15	1.500	.190- .250	11.36
MS9899-16	1.562	.252- .312	11.67
MS9899-17	1.625	.315- .375	11.98
MS9899-18	1.688	.378- .438	12.29
MS9899-19	1.750	.440- .500	12.60
MS9899-20	1.812	.502- .562	12.89
MS9899-21	1.875	.565- .625	13.20
MS9899-22	1.938	.628- .688	13.51
MS9899-23	2.000	.690- .750	13.82

PART NO.	L	K	APPROX WEIGHT LB/100
MS9899-24	2.125	.815- .875	14.41
MS9899-25	2.250	.940-1.000	15.02
MS9899-26	2.375	1.065-1.125	15.64
MS9899-27	2.500	1.190-1.250	16.26
MS9899-28	2.625	1.315-1.375	16.87
MS9899-29	2.750	1.440-1.500	17.48
MS9899-30	2.875	1.565-1.625	18.09
MS9899-31	3.000	1.690-1.750	18.70
MS9899-32	3.125	1.815-1.875	19.31
MS9899-33	3.250	1.940-2.000	19.92
MS9899-34	3.375	2.065-2.125	20.54
MS9899-35	3.500	2.190-2.250	21.16
MS9899-36	3.625	2.315-2.375	21.77
MS9899-37	3.750	2.440-2.500	22.38
MS9899-38	3.875	2.565-2.625	23.00
MS9898-39	4.000	2.690-2.750	23.62
MS9899-40	4.125	2.815-2.875	24.23
MS9899-41	4.250	2.940-3.000	24.84
MS9899-42	4.375	3.065-3.125	25.45
MS9899-43	4.500	3.190-3.250	26.06

PART NO.	L	K	APPROX WEIGHT LB/100
MS9899-44	4.625	3.315-3.375	26.67
MS9899-45	4.750	3.440-3.500	27.28
MS9899-46	4.875	3.565-3.625	27.94
MS9899-47	5.000	3.690-3.750	28.55
MS9899-48	5.125	3.815-3.875	29.16
MS9899-49	5.250	3.940-4.000	29.77
MS9899-50	5.375	4.065-4.125	30.38
MS9899-51	5.500	4.190-4.250	30.99
MS9899-52	5.625	4.315-4.375	31.60
MS9899-53	5.750	4.440-4.500	32.21
MS9899-54	5.875	4.565-4.625	32.82
MS9899-55	6.000	4.690-4.750	33.43

1. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .012 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5616.
6. MANUFACTURING SPECIFICATION: AMS 7470 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
8. HARDNESS: ROCKWELL C32-38.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 21 Apr 69 REVISED

P.A. USAF - 11
Other Coast
Navy - AS

TITLE: BOLT, MACHINE-DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, AMS 5616, .500 20 UNJF-3A

MILITARY STANDARD
MS9899

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5306-F033

This military standard is approved by the Department of the Air Force for use by the Air Force Systems Command and is mandatory for use by those activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF - 85

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:27Z
Check the source to verify that this is the current version before use.