FSC. SUP CLASS
1290

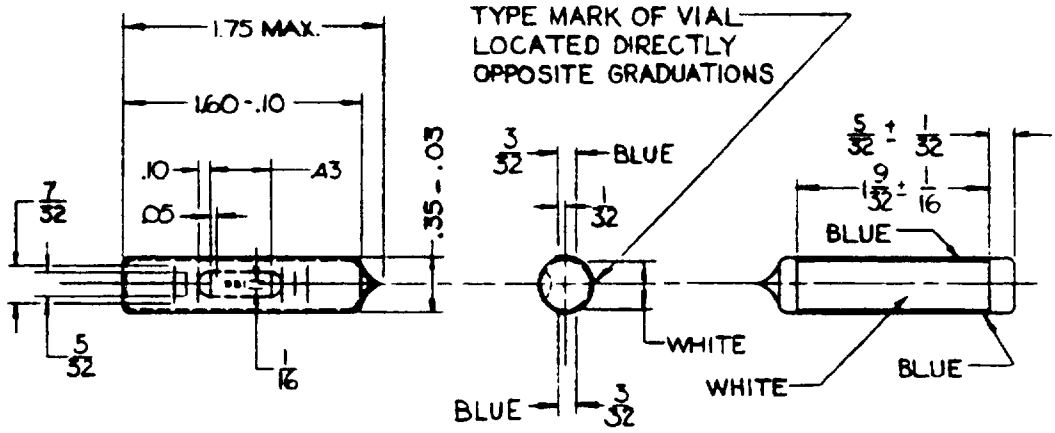

DASH NO.	TYPE DESIGNATION	SENSITIVITY .1 OF AN INCH	
		MAX.	MIN.
-1	DB1	0'20"	0'40"
-2	DB2	0'40"	1'20"
-3	DB3	2'00"	3'00"
-4	DB4	4'30"	5'30"
-5	DB5	20'00"	30'00"

MATERIAL: GLASS

TOLERANCE: DECIMAL ± .010, FRACTIONAL ± 1/64, UNLESS OTHERWISE SPECIFIED.

NOTES: 1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

3. VIAL TO BE FILLED WITH A CLEAR LIQUID WHICH WILL PROVIDE A BUBBLE HAVING A UNIFORM MOVEMENT.

APPROVED 10 June 1969 REVISED 20 June 1969

User activities: Army - MI, MC
Navy - MC
Air Force - None

Review activities: Army - MU
Navy - OS
Air Force - 84

This military standard is approved by the Department of Defense and is mandatory on all activities. Submission for all new engineering and design applications and for reprocuring are doubtful be made from this document.

ENTIRE STANDARD REVISED

P.A. ARMY - MU Other Cust NAVY - OS AIR FORCE - 84	TITLE VIAL, LEVEL CYLINDRICAL, TYPE DB	MILITARY STANDARD MS 35103
PROCUREMENT SPECIFICATION MIL-V-31[illegible]	SUPERSEDES	SHEET OF 1 1

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.