FED. SUP CLASS
1290

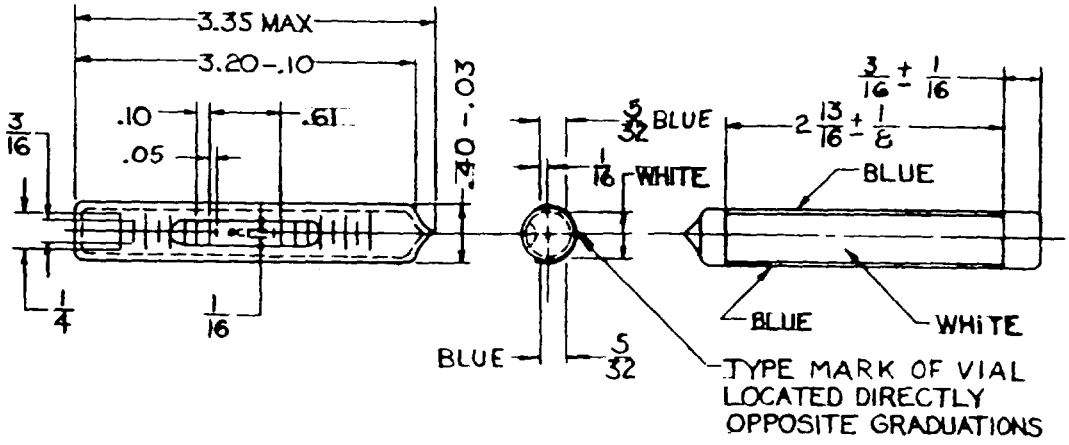

DASH NO.	TYPE DESIGNATION	SENSITIVITY .1 OF AN INCH	
		MAX.	MIN.
-1	DC1	0°07"	0°13"
-2	DC2	0°20"	0°40"
-3	DC3	0°40"	1°20"

MATERIAL: GLASS

TOLERANCE: DECIMAL ± .010, FRACTIONAL ± 1/64, UNLESS OTHERWISE SPECIFIED.

NOTES: 1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

3. VIAL TO BE FILLED WITH A CLEAR LIQUID WHICH WILL PROVIDE A BUBBLE HAVING A UNIFORM MOVEMENT.

APPROVED 10 June 1953 REVISED 20 June 1969

ENTIRE STANDARD REVISED

P.A. ARMY - MU Other Cust NAVY - OS AIR FORCE - 84	TITLE VIAL, LEVEL CYLINDRICAL, TYPE DC	MILITARY STANDARD MS 35104
PROCUREMENT SPECIFICATION MIL-V-3164	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 65 672-1 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED

User activities: Army - MI, WC; Navy - MC; Air Force - None

Review activities: Army - MU; Navy - OS; Air Force - 84

This military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.