NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-83536/11
AMENDMENT 3
10 July 1999
SUPERSEDING
AMENDMENT 2
30 Sep 1996

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT,
LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE,
HERMETICALLY SEALED, ALL WELDED, AC COILS

This amendment forms a part of MIL-PRF-83536/11, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS" and "MARKING (EITHER SIDE)".

PAGE 2

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS" and "MARKING (EITHER SIDE)".

PAGE 3

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".

FIGURE 1, side view: Delete "MARKING (EITHER SIDE)" and substitute "MARKING (SEE NOTES 6 AND 7)".

PAGE 4

FIGURE 1, header diagram at bottom of page, right side: Delete ".400 ±.005" and substitute ".320 ±.005".

PAGE 5

FIGURE 1, socket pin diagram, delete and substitute:

"

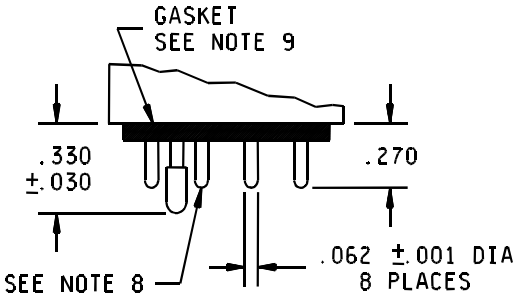

SOCKET PIN

"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.

PAGE 8

* NOTE 8, delete and substitute “8. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Terminals shall be gold plated. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity. The polarizing pin of the track mount relay only shall be gold plated.”

* NOTE 9, delete and substitute “9. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 15 to 35, thickness .050 ±.005. Gasket material according to AMS 3332 has been considered acceptable.”

* NOTE 11, delete and substitute “11. Track mount base, knob, latching pin and post shall be corrosion resistant. One way of ensuring corrosion resistance is to nickel plate stainless steel 303 with 100 microinches minimum thickness per McDonnell Douglas P.S.13112 (Deutsch Relays, Inc. Patent number 3.790,915) or equivalent 100 microinches thick minimum.”

PAGE 9

Delete "Contact voltage drop or resistance:" and substitute "Contact voltage drop and resistance:".

PAGE 11

TABLE III, dash number column, 001 and 002: Delete "5/" (2 places). Dash numbers 003 and 004, add "5/" (2 places).

TABLE III, Coil current (amperes) column, add "maximum".

TABLE III, Specified hold voltage (V ac), at 25°C column, 50/60/400 Hz (3 places): Delete "24" and substitute "30" (3 places).

TABLE III, Specified hold voltage (V ac), over temperature range column, 50/60/400 Hz (3 places): Delete "30" and substitute "40" (3 places).

PAGE 12

Dielectric withstanding voltage, track mount, coil to case column, sea level, initial and after life: Delete "1250" and substitute "1050" (2 places).

Delete "Maximum leakage current: 100 microamperes rms in accordance with MIL-R-83536." and substitute "Maximum leakage current for track mount only: 100 microamperes rms."

Shock (specified pulse), delete and substitute:

"Shock (specified pulse): Applicable, MIL-STD-202, method 213, test condition C, except that peak value shall be 200 g's for 6 ±1 ms (for dash numbers -003 and -004, peak value shall be 500 g's). Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts."

Vibration (sinusoidal), delete and substitute:

"Vibration (sinusoidal): Applicable, MIL-STD-202, method 204, 30 g's, except that frequency range shall be 10 to 3,000 Hz (for -003 and -004, 50 g's). Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.

Vibration (random), delete and substitute:

"Vibration (random): Applicable to qualification and group C inspections. Test in accordance with MIL-STD-202, method 214, test condition IG (0.4 g^2/Hz, 50 to 2000 Hz). Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts."

Weight: Delete "(46 g's)" and substitute "(46 grams)". Delete "(54.5 g's)" and substitute "54.5 grams".

PAGE 14

TABLE V, Superseded PIN -34, Replacement PIN: Delete "007" and substitute "006".

The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based upon the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1059-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.