INCH-POUND

MIL-R-83536/15
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE HERMETICALLY SEALED, ALL WELDED, DC COIL

This amendment forms a part of MIL-R-83536/15, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 1

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

FIGURE 1, side view, dimension 1 025 Add "SQ"

PAGE 2

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 3

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 4

FIGURE 1, socket pin terminal diagram, delete and substitute

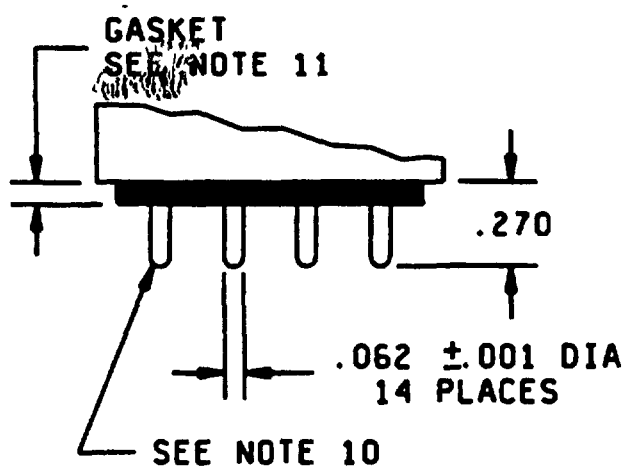

SOCKET PIN TERMINAL .

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.

PAGE 7

Delete "Contact voltage drop or resistance " and substitute "Contact voltage drop and resistance "

PAGE 9

TABLE III, Coil resistance (ohms) minimum column Delete "18" and substitute "16" (3 places), delete "70" and substitute "63" (3 places), delete "290" and substitute "260" (5 places)

PAGE 11

Vibration (random) line 2 Delete "15 minutes each plane"

Weight Delete "(77 g's)" and substitute "(77 grams)"

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5945-0964-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.